

Customer	Date	12/10/2020
Contact	Project	
Phone number	Project no.	
Email		

10SV08R030T
1016LD223
Operating data

Pump type	Single head pump	Fluid	Water, pure
No. of pumps / Reserve	1 / 0	Operating temperature t A	°C 4
Nominal flow	l/s 0	pH-value at t A	7
Nominal head	m 0	Density at t A	kg/m ³ 1000
Static head	m 0	Kin. viscosity at t A	mm ² /s 1.569
Inlet pressure	kPa 0	Vapor pressure at t A	kPa 100
Environmental temperature	°C 20	Solids	0
Available system NPSH	m 0	Altitude	m 0

Pump data

Make	Lowara	Nominal	l/s ()
Speed	rpm 2900	Flow	Max- l/s 3.9
Number of stages	8		Min- l/s
Max. casing pressure	kPa	Nominal	m
Max. working pressure	kPa 934.9	Head	at Qmax m 44.4
Head H(Q=0)	m 95		at Qmin m 95.3
Weight	kg 43	Shaft power	kW ()
	Max. mm 96	Max. shaft power	kW 2.8
Impeller R	designed mm 96	Efficiency	%
	Min. mm 96	NPSH 3%	m

Pump Materials

Pump body	Stainless steel / AISI 304
Impeller	Stainless steel / AISI 304
Diffuser	Stainless steel / AISI 304
Outer sleeve	Stainless steel / AISI 304
Shaft	Stainless steel / AISI 304
Adapter	Cast iron
Base	Aluminium
Coupling	Aluminium
SEAL HOUSING	Stainless steel / AISI 304
Coupling protection	Stainless steel / AISI 304
Shaft sleeve and bushing	Tungsten carbide
Fill / drain plugs	Stainless steel / AISI 304
Tie rods	Galvanized steel
Wear Ring	Technopolymer PPS

Shaft Seal

e-SV Mechanical seal	Roten
e-SV - Uniten (-30 / +120 °C)	
1 - Rotating part	Silicon Carbide
2 - Stationary part	Resin impregnated carbon
3 - Elastomers	EPDM
4 - Springs	AISI 316
5 - Other components	AISI 316

Motor data

Manufacturer	Lowara	Electric voltage	400 V	Speed	2895 rpm	Insulation class	155 (F)
Specific design	IE3 Three phase surface motor (e-SV)			Frame size	100R	Colour	RAL 5010
Type	PLM100RB14/330 E3 (220-240/380-415V)						
Rated power	3 kW	Degree of protection	IP55				
Electric current	6.33 A						

Remarks:

Customer	Date	12/10/2020
Contact	Project	
Phone number	Project no.	
Email		

10SV08R030T

1016LD223


Hydraulic data

Operating Data Specification		Hydraulic data (duty point)	Impeller design	
Flow	0 l/s	Flow	Impeller R	96 mm
Head	0 m	Head	Frequency	50 Hz
Static head	0 m	MEI >=0,7	Speed	2900 rpm

Power datas referred to:

Water, pure [100%] ; 4°C; 1000kg/m³; 1.57mm²/s

Performance according to ISO 9906:2012 – Grade 3B

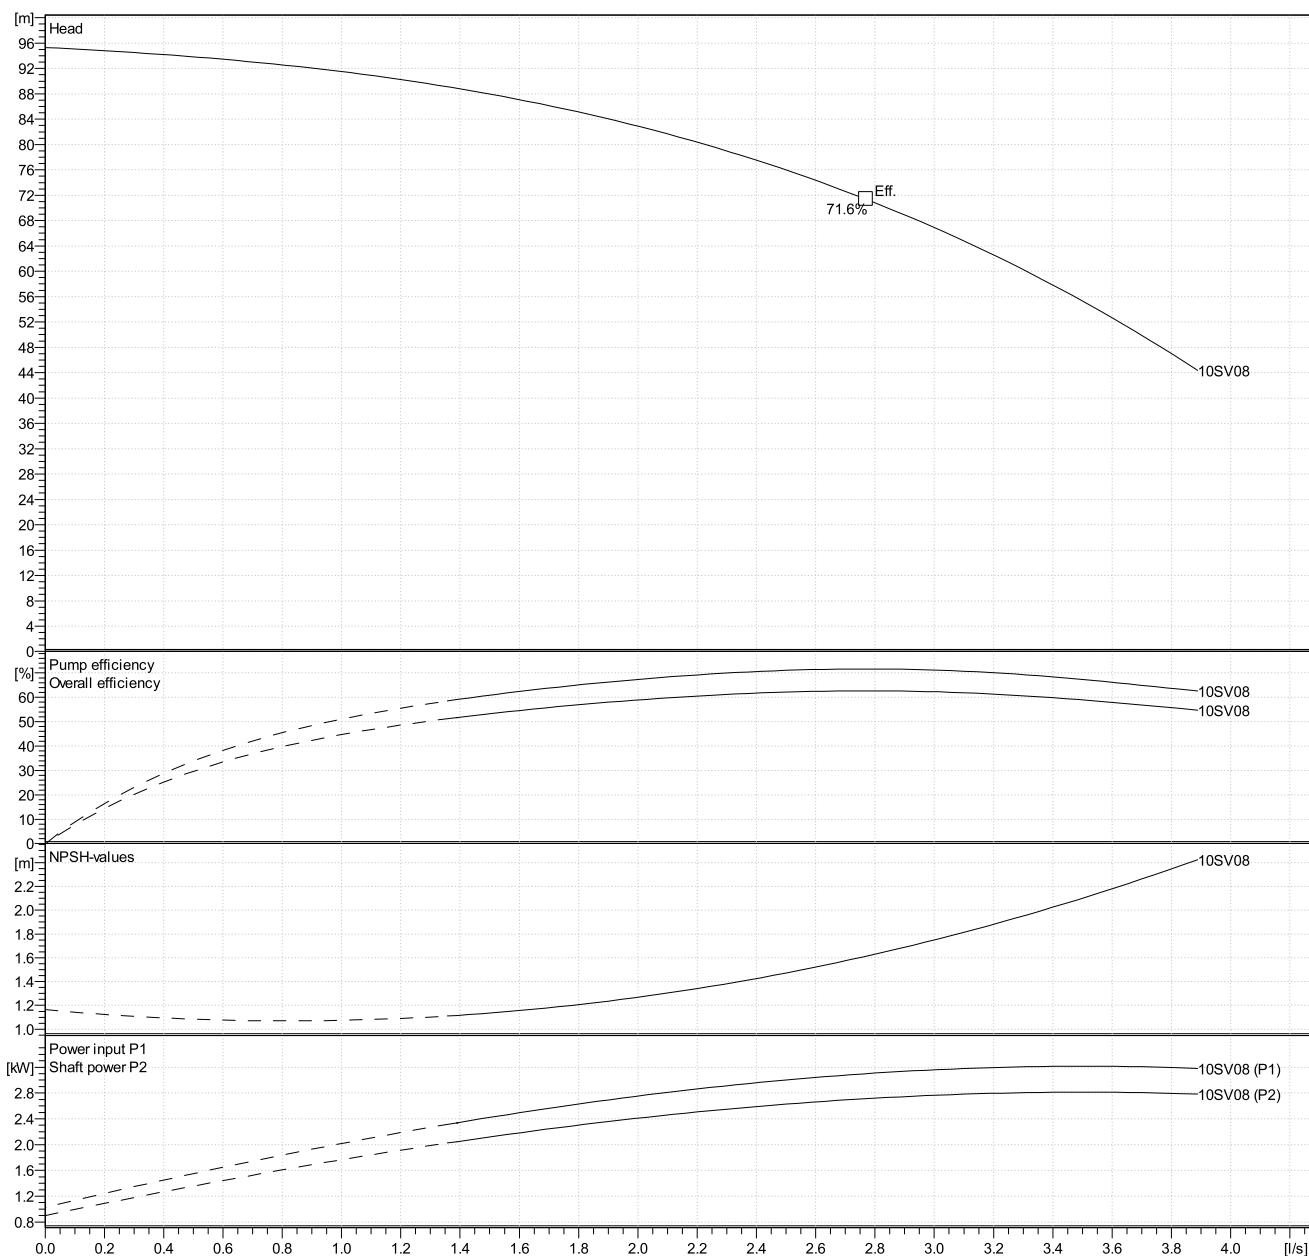


Customer	Date	12/10/2020
Contact	Project	
Phone number	Project no.	
Email		

10SV08R030T

1016LD223

Drawing

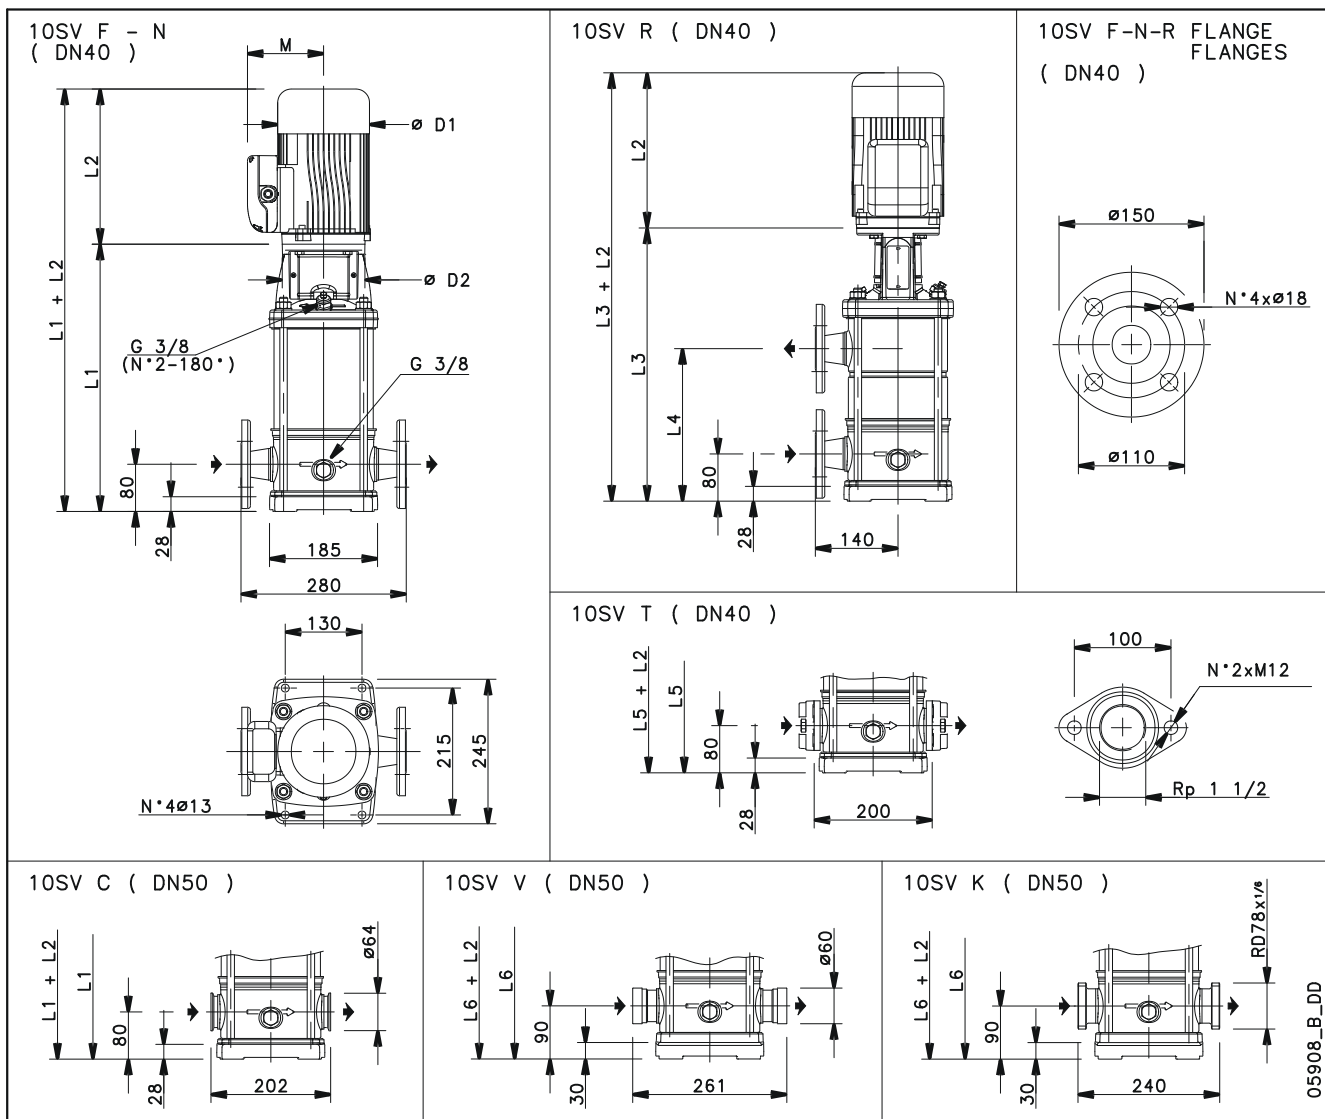

Dimensions mm

D1	174					Weight	
D2	160					43.4	kg
L1	569						
L2	298						
L3	569						
L4	355						
L5	569						
L6	579						
M	134						