


DOMO 15 SG

Company	Anglian Pumping Services	Customer	Date	12/1/2020
Contact	Joshua Harvey	Contact	List price	Price on req.
Project		Phone number	Family code	
Project no.		Email	Item no.	

Performance according to ISO 9906:2012 – Grade 3B

Power datas referred to:

Water, pure [100%] ; 4°C; 1000kg/m³; 1.57mm²/s

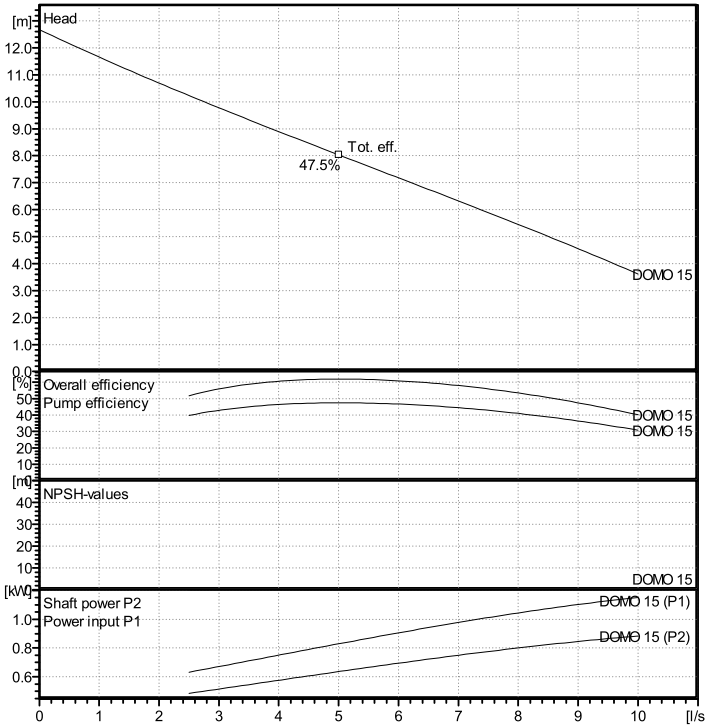

Operating Data Specification

Flow	0 l/s
Head	0 m

Hydraulic data (duty point)

Flow	
Head	
Power input	

Pump data

Make	Lowara
Type	DOMO 15 SG Submersible waste water pump
Speed	2900
Head H(Q=0)	12.7 m
Suction side	
Discharge side	
Types of installation	Submersible pump
Weight	15.3 kg

Materials / seals

Pump body	Stainless steel
Impeller	Stainless steel
SUCTION FLANGE	Stainless steel
Fixing ring	Stainless steel

Shaft Seal

Rotating Assembly	Q1-Silicon carbide
Fixed Assembly	Q1-Silicon carbide
Elastomers	P-NBR
Springs	G-AISI 316
Other Components	G-AISI 316

Motor data

Rated power P2	1.1 kW	Nom. Speed	2855 rpm
Frequency	50	Phase	1~
Rated voltage	230 V	Rated current	7.02 A
Protection class	IP X8	Insulation class	F
Permitted voltage tolerance +/- 10%			

Dimensions mm

C	198		
DNM	Rp2		
H	468		
H1	111.5		

Note:

