

## Data sheet: Stratos MAXO-D 30/0,5-6 PN 16

### Hydraulic data

Energy efficiency index (EEI)	0.19
Maximum operating pressure $PN$	16 bar
Head max $H_{max}$	6.0
Flow max hr $Q_{max\ hr}$	8.5
Flow max add $Q_{max\ add}$	13.5
Minimum suction head at 50 °C	3
Minimum suction head at 95 °C	10
Minimum suction head at 110 °C	16
Min. fluid temperature $T_{min}$	-10 °C
Max. fluid temperature $T_{max}$	110 °C
Min. ambient temperature $T_{min}$	-10 °C
Max. ambient temperature $T_{max}$	40 °C

### Materials

Pump housing	EN-GJL-250
Impeller	PPS-GF40
Shaft	1.4122
Bearing	Carbon-graphite

### Information for order placements

Brand	Wilo
Product description	Stratos MAXO-D 30/0,5-6 PN 16
EAN number	4048482798134
Article number	2186289
Net weight, approx. $m$	16 kg
Gross weight, approx. $m$	20.6 kg
Length with packaging	800 mm
Height with packaging	394 mm
Width with packaging	600 mm
Packaging property	Transport packaging
Packaging type	Cardboard box
Minimum order quantity	1

### Motor data


Min current $I_{min}$	0.11 A
Max current $I_{max}$	0.90 A
Min. speed $n_{min}$	500 rpm
Max. speed $n_{max}$	3050 rpm
Power consumption $P_{1\ min}$	7.0 W
Power consumption $P_{1\ max}$	135.0 W
Emitted interference	EN 61800-3;2004+A1;2012 /residential area (C1)
Interference resistance	EN 61800-3;2004+A1;2012 /industrial environment (C2)
Insulation class	F
Protection class	IPX4D

### Installation dimensions

Pipe connection on the pressure side $DNd$	G 2
Pipe connection on the suction side $DNs$	G 2
Port-to-port length $l0$	180 mm

## Pump curves: Stratos MAXO-D 30/0,5-6 PN 16

Wilo-Stratos MAXO-D 30/0,5-6

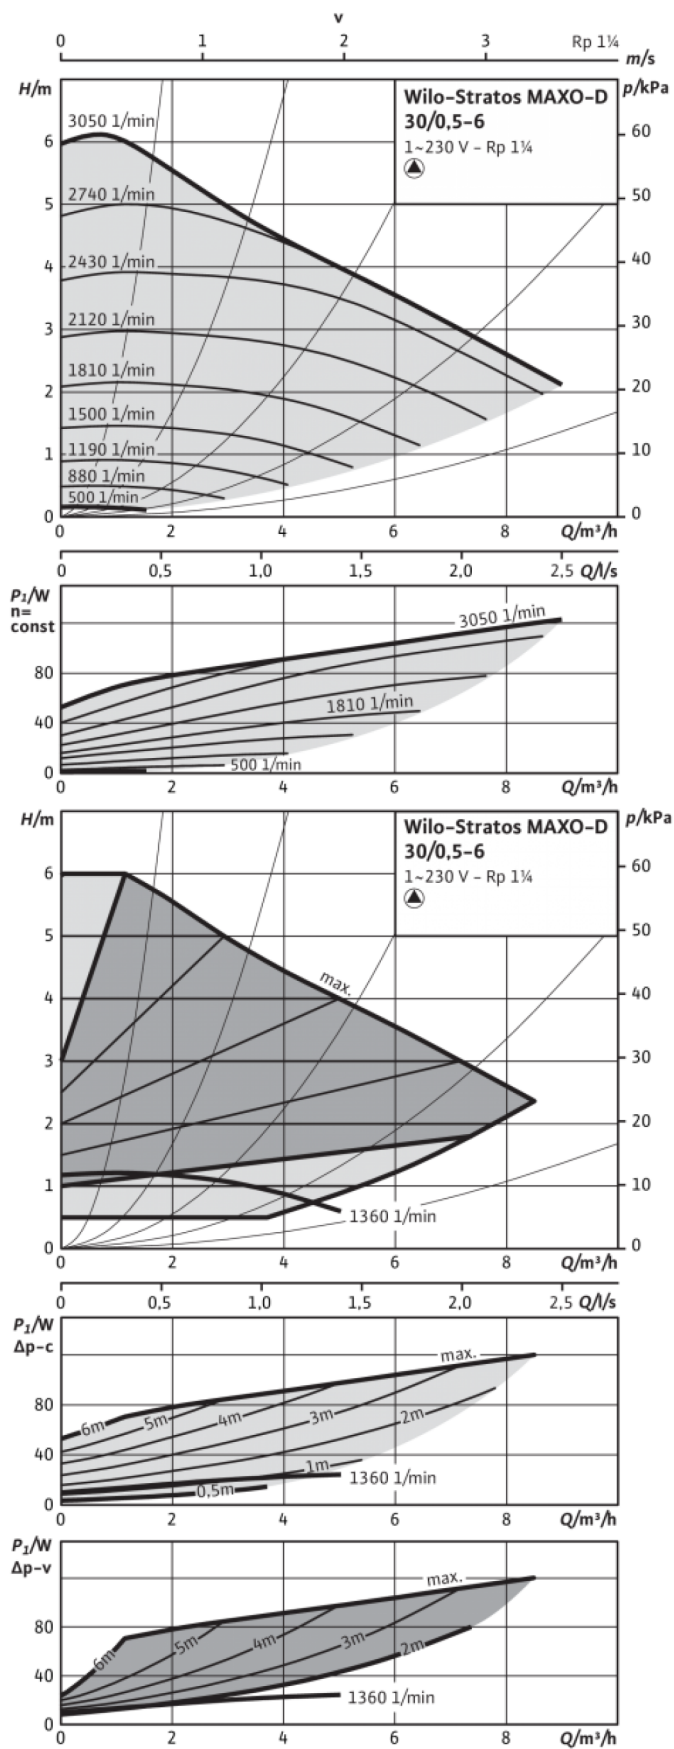

## Pump curves: Stratos MAXO-D 30/0,5-6 PN 16

Wilo-Stratos MAXO-D 30/0,5-6

