

Data sheet: Stratos MAXO-D 32/0,5-12 PN 16

Hydraulic data

Energy efficiency index (EEI)	0.19
Maximum operating pressure PN	16 bar
Head max H_{max}	10.0
Flow max hr $Q_{max\ hr}$	13.0
Flow max add $Q_{max\ add}$	23.0
Minimum suction head at 50 °C	3
Minimum suction head at 95 °C	10
Minimum suction head at 110 °C	16
Min. fluid temperature T_{min}	-10 °C
Max. fluid temperature T_{max}	110 °C
Min. ambient temperature T_{min}	-10 °C
Max. ambient temperature T_{max}	40 °C

Materials

Pump housing	EN-GJL-250
Impeller	PPS-GF40
Shaft	1.4122, DLC-coated
Bearing	Carbon, antimony-impregnated

Information for order placements

Brand	Wilo
Product description	Stratos MAXO-D 32/0,5-12 PN 16
EAN number	4048482798165
Article number	2186292
Net weight, approx. m	21 kg
Gross weight, approx. m	25.5 kg
Length with packaging	800 mm
Height with packaging	394 mm
Width with packaging	600 mm
Packaging property	Transport packaging
Packaging type	Cardboard box
Minimum order quantity	1

Motor data


Min current I_{min}	0.11 A
Max current I_{max}	1.40 A
Min. speed n_{min}	450 rpm
Max. speed n_{max}	4400 rpm
Power consumption $P_{1\ min}$	7.0 W
Power consumption $P_{1\ max}$	315.0 W
Emitted interference	EN 61800-3;2004+A1;2012 /residential area (C1)
Interference resistance	EN 61800-3;2004+A1;2012 /industrial environment (C2)
Insulation class	F
Protection class	IPX4D

Installation dimensions

Pipe connection on the pressure side	DN 32
DNd	
Pipe connection on the suction side	DN 32
DNs	
Port-to-port length $l0$	220 mm

Pump curves: Stratos MAXO-D 32/0,5-12 PN 16

Wilo-Stratos MAXO-D 32/0,5-12

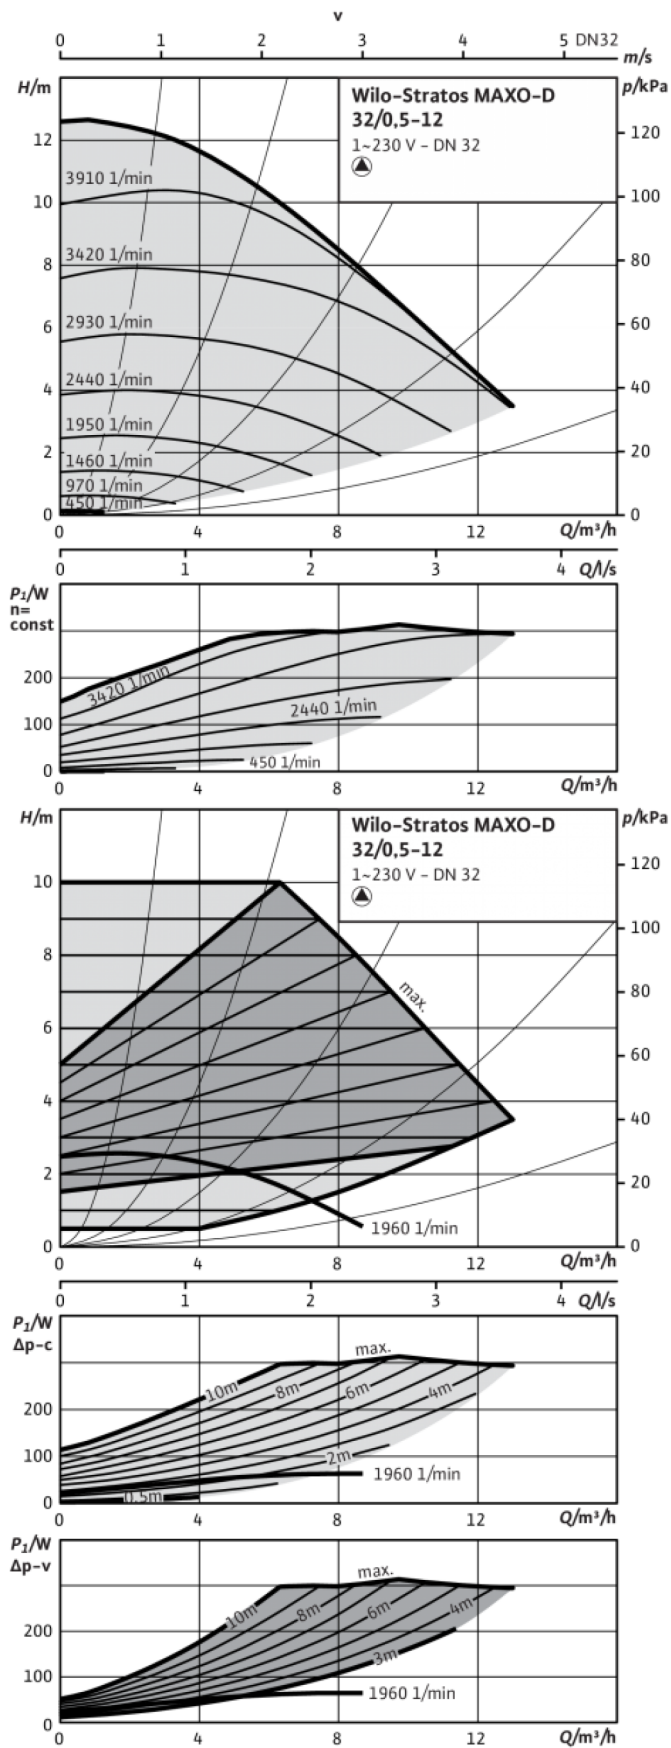

Pump curves: Stratos MAXO-D 32/0,5-12 PN 16

Wilo-Stratos MAXO-D 32/0,5-12

