

**Qty. Description**

1 Unilift AP35.40.08.3.V



**Note! Product picture may differ from actual product**

Product No.: [96001718](#)

Submersible drainage pump type

Vertical single-stage stainless steel submersible pump with vertical discharge port and integrated submersible 3-phase totally enclosed motor in insulation class F. The pump is fitted with a suction strainer.

The impeller is a VORTEX impeller for 35 mm free passage suitable for pumping groundwater, surface water, rain water and similar.

The pump has a double shaft seal and an intermediate oil chamber pre-filled with non-toxic special oil.

The pump has a riser pipe, a cooling jacket for continuous cooling of the motor by the pumped liquid and long-life deep-groove greased-for-life ball bearings.

The pump is ready for use as it is fitted with carrying handle and is supplied with a 10 m mains cable. The mains cable is of the plug type with glass sealing compound in the socket to prevent penetration of humidity into the stator windings.

**Liquid:**

Pumped liquid: Any Newtonian liquid

Liquid temperature range: 0 .. 55 °C


Density at selected liquid temperature: 998.2 kg/m<sup>3</sup>

**Technical:**

Type of impeller: VORTEX

Qty.	Description
	Maximum particle size: 35 mm
	<b>Materials:</b>
	Pump housing: Stainless steel DIN W.-Nr. 1.4301 AISI 304
	Impeller: Stainless steel DIN W.-Nr. 1.4301 AISI 304
	<b>Installation:</b>
	Pump outlet: Rp 1 1/2
	Maximum installation depth: 7 m
	<b>Electrical data:</b>
	Power input - P1: 1.1 kW
	Mains frequency: 50 Hz
	Rated voltage: 3 x 400 V
	Rated current: 2 A
	Cos phi - power factor: 0.86
	Rated speed: 2820 rpm
	Enclosure class (IEC 34-5): IP68
	Insulation class (IEC 85): F
	Length of cable: 10 m
	Type of cable plug: NONE
	<b>Others:</b>
	Net weight: 12.5 kg
	Gross weight: 13 kg
	Danish VVS No.: 391318131
	Swedish RSK No.: 5880118
	Country of origin: HU
	Custom tariff no.: 84137021

## 96001718 Unilift AP35.40.08.3.V 50 Hz

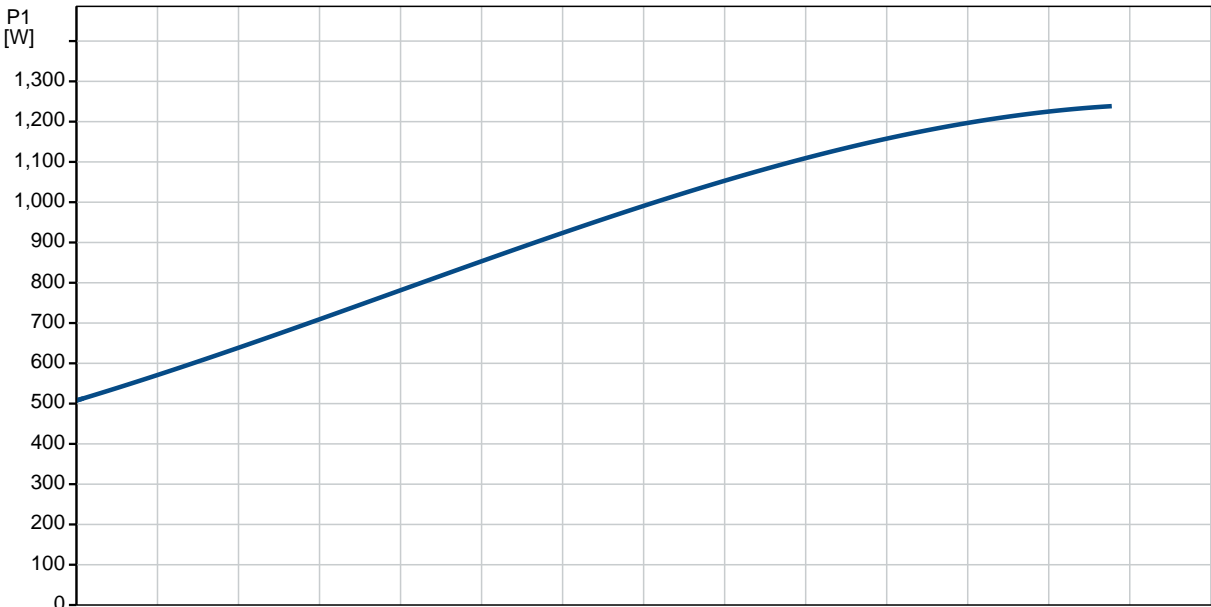

Description	Value
-------------	-------

**General information:**

Product name:	Unilift AP35.40.08.3.V
Product No:	96001718
EAN number:	5700390896997
	5700390896997
Price:	944,00 GBP

**Technical:**

Max flow:	5 l/s
Head max:	11 m
Type of impeller:	VORTEX
Maximum particle size:	35 mm

**Materials:**

Pump housing:	Stainless steel
	DIN W.-Nr. 1.4301
	AISI 304
Impeller:	Stainless steel
	DIN W.-Nr. 1.4301
	AISI 304

**Installation:**

Pump outlet:	Rp 1 1/2
Maximum installation depth:	7 m
Inst dry/wet:	D/S
Installation:	horizontal or vertical

**Liquid:**

Pumped liquid:	Any Newtonian liquid
Liquid temperature range:	0 .. 55 °C
Density at selected liquid temperature:	998.2 kg/m <sup>3</sup>

**Electrical data:**

Power input - P1:	1.1 kW
P2:	0.7 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 400 V
Rated current:	2 A
Cos phi - power factor:	0.86
Rated speed:	2820 rpm
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	F
Motor protec:	NONE
Thermal protec:	external
Length of cable:	10 m
Type of cable plug:	NONE

**Others:**

Net weight:	12.5 kg
Gross weight:	13 kg
Danish VVS No.:	391318131
Swedish RSK No.:	5880118
Country of origin:	HU
Custom tariff no.:	84137021

