

Qty. Description

1 Unilift AP12.50.11.1



Note! Product picture may differ from actual product

Product No.: [96001962](#)

Submersible drainage pump type

Vertical single-stage stainless steel submersible pump with vertical discharge port and integrated submersible 1-phase totally enclosed motor in insulation class F with thermal overload protection. The pump is fitted with a suction strainer.

The impeller is a SEMI OPEN impeller for 12 mm free passage suitable for pumping groundwater, surface water, rain water and similar.

The pump has a double shaft seal and an intermediate oil chamber pre-filled with non-toxic special oil.

The pump has a riser pipe, a cooling jacket for continuous cooling of the motor by the pumped liquid and long-life deep-groove greased-for-life ball bearings.

The pump is ready for use as it is fitted with carrying handle and is supplied with a 10 m mains cable. The mains cable is of the plug type with glass sealing compound in the socket to prevent penetration of humidity into the stator windings.

Liquid:

Pumped liquid: Any Newtonian liquid



Liquid temperature range: 0 .. 55 °C

Density at selected liquid temperature: 998.2 kg/m³

Technical:

Qty.	Description
	Type of impeller: SEMI OPEN
	Maximum particle size: 12 mm
	Materials:
	Pump housing: Stainless steel DIN W.-Nr. 1.4301 AISI 304
	Impeller: Stainless steel DIN W.-Nr. 1.4301 AISI 304
	Installation:
	Pump outlet: Rp 2
	Maximum installation depth: 7 m
	Electrical data:
	Type of motor: PSC
	Power input - P1: 1.7 kW
	Mains frequency: 50 Hz
	Rated voltage: 1 x 230 V
	Rated current: 8.5 A
	Cos phi - power factor: 0.92
	Rated speed: 2760 rpm
	Capacitor size - run: 20 µF/400 V
	Enclosure class (IEC 34-5): IP68
	Insulation class (IEC 85): F
	Length of cable: 10 m
	Type of cable plug: NONE
	Others:
	Net weight: 15 kg
	Gross weight: 16 kg
	Country of origin: HU
	Custom tariff no.: 84137021

96001962 Unilift AP12.50.11.1 50 Hz

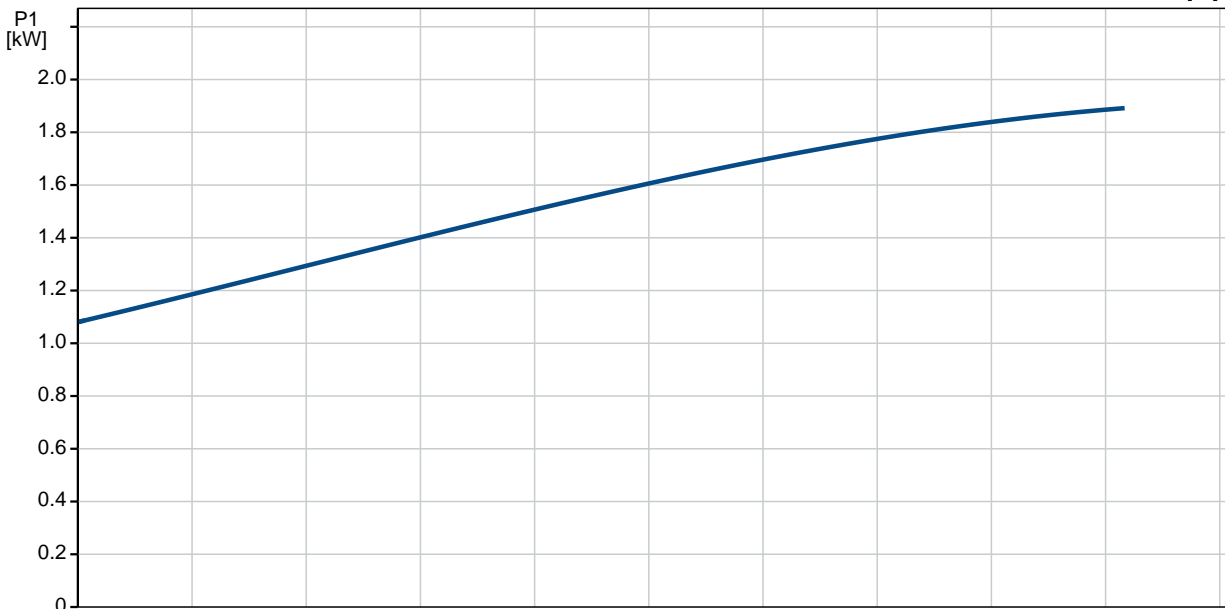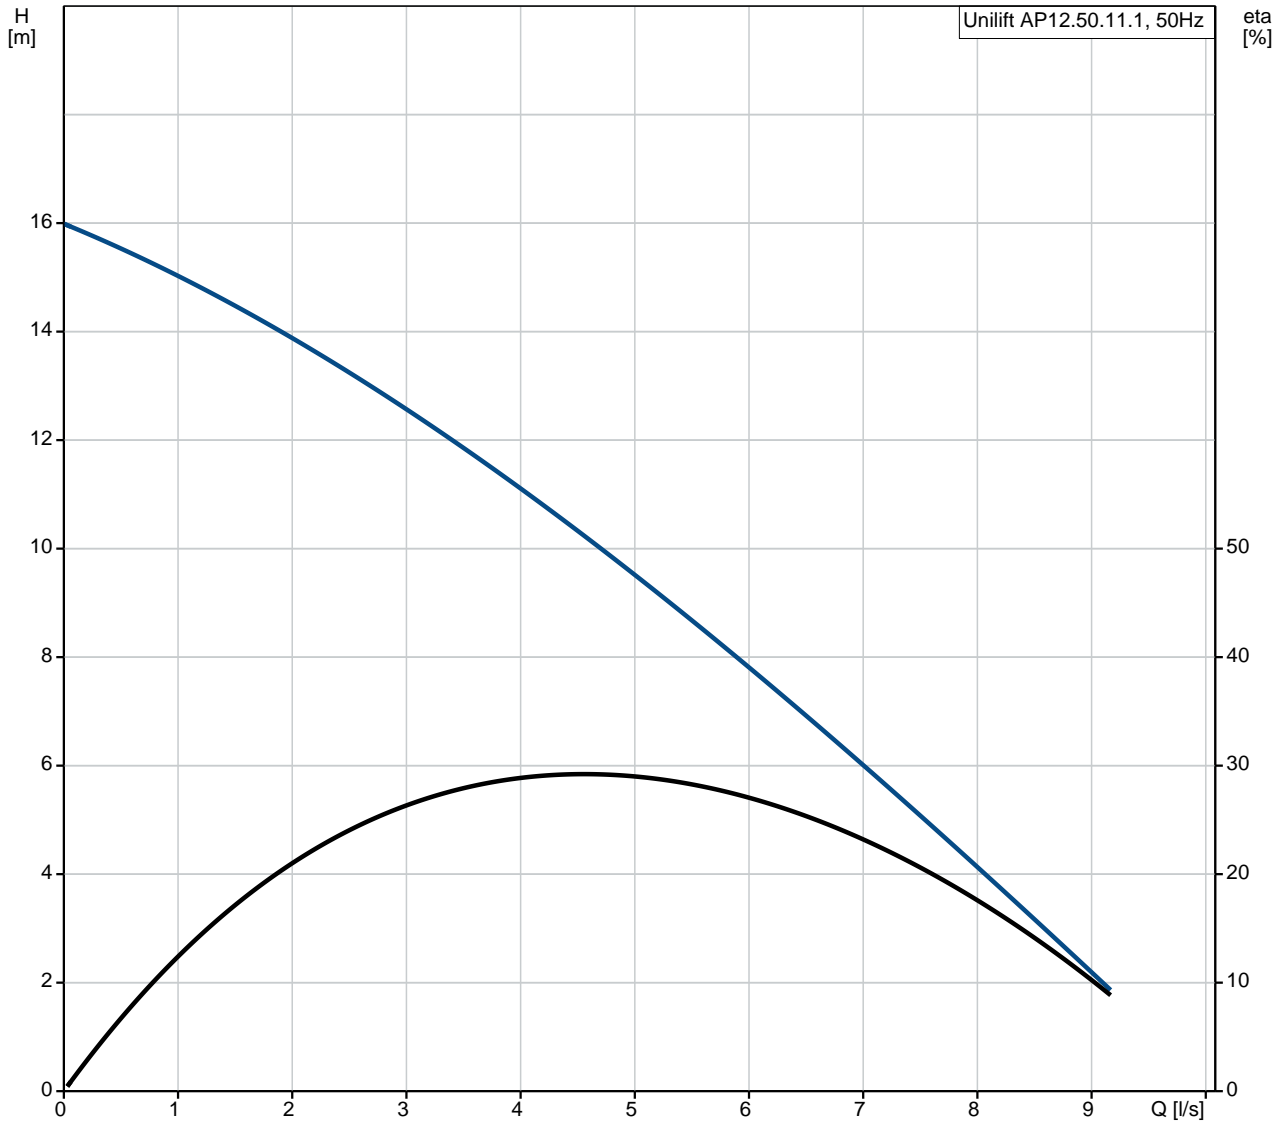

Description	Value
General information:	
Product name:	Unilift AP12.50.11.1
Product No:	96001962
EAN number:	5700390897406
	5700390897406
Price:	1.246,00 GBP
Technical:	
Max flow:	8.33 l/s
Head max:	17 m
Type of impeller:	SEMI OPEN
Maximum particle size:	12 mm
Materials:	
Pump housing:	Stainless steel DIN W.-Nr. 1.4301 AISI 304
Impeller:	Stainless steel DIN W.-Nr. 1.4301 AISI 304
Installation:	
Pump outlet:	Rp 2
Maximum installation depth:	7 m
Inst dry/wet:	D/S
Installation:	horizontal or vertical
Liquid:	
Pumped liquid:	Any Newtonian liquid
Liquid temperature range:	0 .. 55 °C
Density at selected liquid temperature:	998.2 kg/m ³
Electrical data:	
Type of motor:	PSC
Power input - P1:	1.7 kW
P2:	1.1 kW
Mains frequency:	50 Hz
Rated voltage:	1 x 230 V
Rated current:	8.5 A
Cos phi - power factor:	0.92
Rated speed:	2760 rpm
Capacitor size - run:	20 µF/400 V
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	F
Motor protec:	CONTACT
Thermal protec:	internal
Length of cable:	10 m
Type of cable plug:	NONE
Others:	
Net weight:	15 kg
Gross weight:	16 kg
Country of origin:	HU
Custom tariff no.:	84137021

