

Qty.	Description
------	-------------

1	<b>Unilift AP35.40.08.A3.V</b>
---	--------------------------------



Note! Product picture may differ from actual product

Product No.: [96010931](#)

Submersible drainage pump type

Vertical single-stage stainless steel submersible pump with vertical discharge port and integrated submersible 3-phase totally enclosed motor in insulation class F. The pump is fitted with a suction strainer.

The pump is supplied with a control box including motor starter and motor protection and with an 0.8 m mains cable. Furthermore, the pump is supplied with level switch for automatic start and stop and 10 m level switch cable.

The impeller is a VORTEX impeller for 35 mm free passage suitable for pumping groundwater, surface water, rain water and similar.

The pump has a double shaft seal and an intermediate oil chamber pre-filled with non-toxic special oil.

The pump has a riser pipe, a cooling jacket for continuous cooling of the motor by the pumped liquid and long-life deep-groove greased-for-life ball bearings.


The pump is ready for use as it is fitted with carrying handle and is supplied with a 10 m mains cable. The mains cable is of the plug type with glass sealing compound in the socket to prevent penetration of humidity into the stator windings.

**Liquid:**

Liquid temperature range: 0 .. 55 °C

Qty.	Description
	<p>Density at selected liquid temperature: 998.2 kg/m<sup>3</sup></p> <p><b>Technical:</b>            Type of impeller: VORTEX            Maximum particle size: 35 mm</p> <p><b>Materials:</b>            Pump housing: Stainless steel                                      DIN W.-Nr. 1.4301                                      AISI 304            Impeller: Stainless steel                                      DIN W.-Nr. 1.4301                                      AISI 304</p> <p><b>Installation:</b>            Pump outlet: Rp 1 1/2            Maximum installation depth: 7 m</p> <p><b>Electrical data:</b>            Power input - P1: 1.1 kW            Mains frequency: 50 Hz            Rated voltage: 3 x 400 V            Rated current: 2 A            Cos phi - power factor: 0.86            Rated speed: 2820 rpm            Enclosure class (IEC 34-5): IP68            Insulation class (IEC 85): F            Length of cable: 10 m            Type of cable plug: NONE</p> <p><b>Others:</b>            Net weight: 14.4 kg            Gross weight: 15 kg            Danish VVS No.: 391318331            Swedish RSK No.: 5880116            Country of origin: HU            Custom tariff no.: 84137021</p>

## 96010931 Unilift AP35.40.08.A3.V 50 Hz

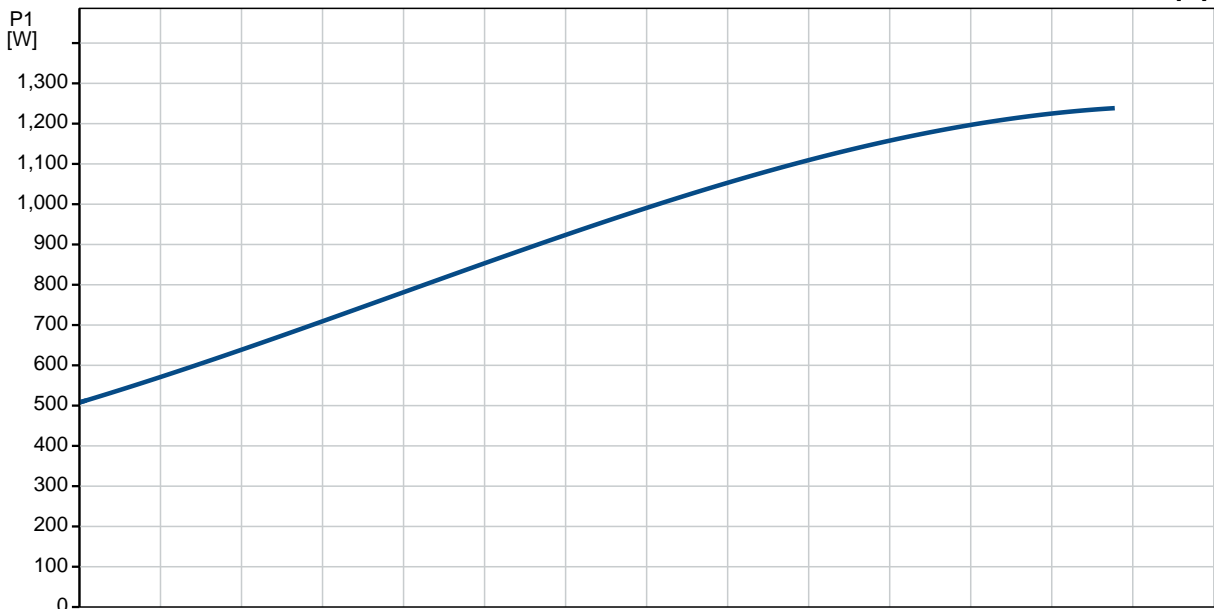

Description	Value
<b>General information:</b>	
Product name:	Unilift AP35.40.08.A3.V
Product No:	96010931
EAN number:	5700390901134
	5700390901134
Price:	1.132,00 GBP
<b>Technical:</b>	
Max flow:	5 l/s
Head max:	11 m
Type of impeller:	VORTEX
Maximum particle size:	35 mm
<b>Materials:</b>	
Pump housing:	Stainless steel
	DIN W.-Nr. 1.4301
	AISI 304
Impeller:	Stainless steel
	DIN W.-Nr. 1.4301
	AISI 304
<b>Installation:</b>	
Pump outlet:	Rp 1 1/2
Maximum installation depth:	7 m
Inst dry/wet:	D/S
Installation:	horizontal or vertical
<b>Liquid:</b>	
Liquid temperature range:	0 .. 55 °C
Density at selected liquid temperature:	998.2 kg/m <sup>3</sup>
<b>Electrical data:</b>	
Power input - P1:	1.1 kW
P2:	0.7 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 400 V
Rated current:	2 A
Cos phi - power factor:	0.86
Rated speed:	2820 rpm
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	F
Motor protec:	NONE
Thermal protec:	external
Length of cable:	10 m
Type of cable plug:	NONE
<b>Controls:</b>	
Level switch:	float switch
<b>Others:</b>	
Net weight:	14.4 kg
Gross weight:	15 kg
Danish VVS No.:	391318331
Swedish RSK No.:	5880116
Country of origin:	HU
Custom tariff no.:	84137021

