

Qty. Description

1 **SP 270-8A G**



Note! Product picture may differ from actual product

Product No.: [96430979](#)

Multi-stage submersible pump for raw water supply, groundwater lowering, pressure boosting and various industrial jobs.

The pump is suitable for pumping clean, thin, non-aggressive liquids without solid particles or fibres.

Pump: The pump is made entirely of Cast iron DIN W.-Nr. EN-JL1040 and suitable for horizontal installation.

The pump is fitted with a built-in non-return valve.

Phase: The motor is a 3-phase motor with sand shield, liquid-lubricated bearings and pressure equalizing diaphragm.

Performance test according to ISO9906 2012 Grade 3B is available on request.

Liquid:
 Pumped liquid: Water
 Maximum liquid temperature: 40 °C
 Max liquid t at 0.15 m/sec: 30 °C
 Selected liquid temperature: 20 °C
 Density: 998.2 kg/m³

Technical:
 Pump speed on which pump data are based: 2900 rpm
 Rated flow: 270 m³/h
 Rated head: 233 m
 Type of impeller: A
 Shaft seal for motor: CER/CARBON
 Curve tolerance: ISO9906:2012 3B
 Motor version: T35

Materials:
Pump: Cast iron
 EN-JL1040
Impeller: Zinc-free bronze
 DIN W.-Nr. 2.1050.01
Motor: Cast iron
 DIN W.-Nr. 0.6025
 ASTM 35-40

Installation:
 Flange standard: DIN
 Pump outlet: DN175
 Motor diameter: 12 inch

Electrical data:



Company name:

Created by:


Phone:

Date:





12/11/2020

Qty.	Description
	<p>Motor type: MMS12000 Rated power - P2: 250 kW Mains frequency: 50 Hz Rated voltage: 3 x 380-400-415 V Rated current: 515-505-510 A Cos phi - power factor: 0.89-0.85-0.81 Rated speed: 2920-2920-2930 rpm Start. method: direct-on-line Enclosure class (IEC 34-5): IP68 Built-in temp. transmitter: no Motor No: 96430686 Windings: PE2/PA</p> <p>Others: Net weight: 1100 kg Shipping volume: 0.926 m³</p>



96430979 SP 270-8A G 50 Hz

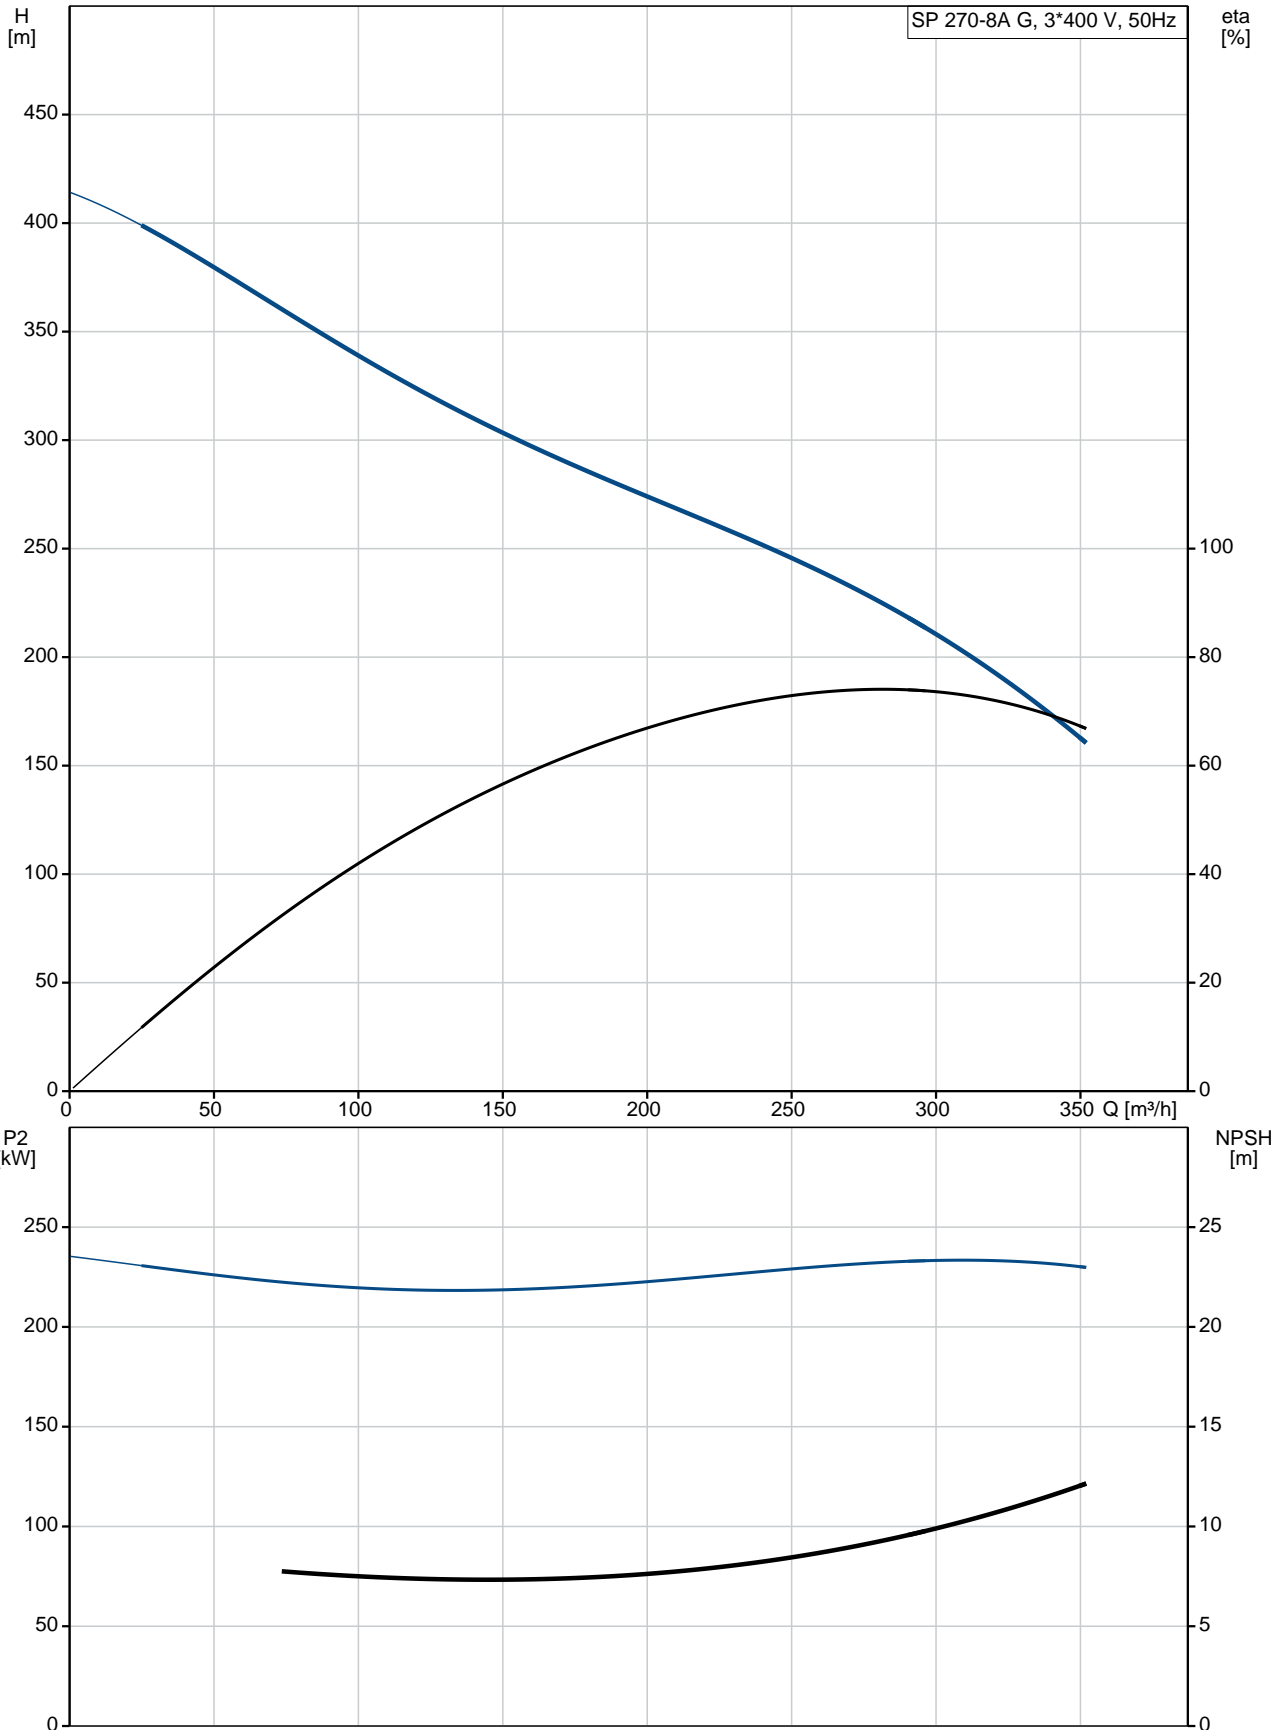

Description	Value
General information:	
Product name:	SP 270-8A G
Product No:	96430979
EAN number:	5700392954381
Technical:	
Pump speed on which pump data are based:	2900 rpm
Rated flow:	270 m ³ /h
Rated head:	233 m
Stages:	8
Type of impeller:	A
Shaft seal for motor:	CER/CARBON
Curve tolerance:	ISO9906:2012 3B
Pump No:	96430871
Model:	A
Valve:	pump with built-in non-return valve
Motor version:	T35
Materials:	
Pump:	Cast iron
Pump:	EN-JL1040
Impeller:	Zinc-free bronze
Impeller:	DIN W.-Nr. 2.1050.01
Motor:	Cast iron
Motor:	DIN W.-Nr. 0.6025
Motor:	ASTM 35-40
Installation:	
Flange standard:	DIN
Pump outlet:	DN175
Motor diameter:	12 inch
Liquid:	
Pumped liquid:	Water
Maximum liquid temperature:	40 °C
Max liquid t at 0.15 m/sec:	30 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m ³
Electrical data:	
Motor type:	MMS12000
Applic. motor:	GRUNDFOS
Rated power - P2:	250 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 380-400-415 V
Rated current:	515-505-510 A
Cos phi - power factor:	0.89-0.85-0.81
Rated speed:	2920-2920-2930 rpm
Start. method:	direct-on-line
Enclosure class (IEC 34-5):	IP68
Motor protec:	NONE
Thermal protec:	external
Built-in temp. transmitter:	no
Motor No:	96430686
Windings:	PE2/PA
Others:	
Net weight:	1100 kg
Shipping volume:	0.926 m ³

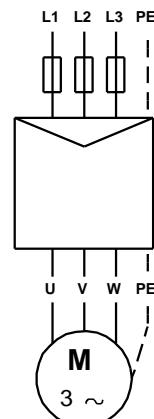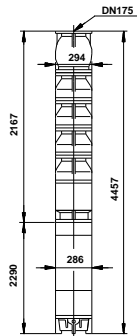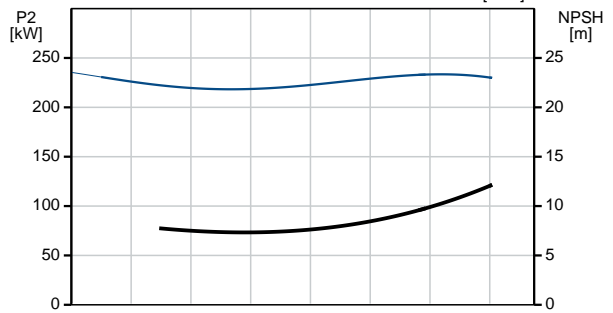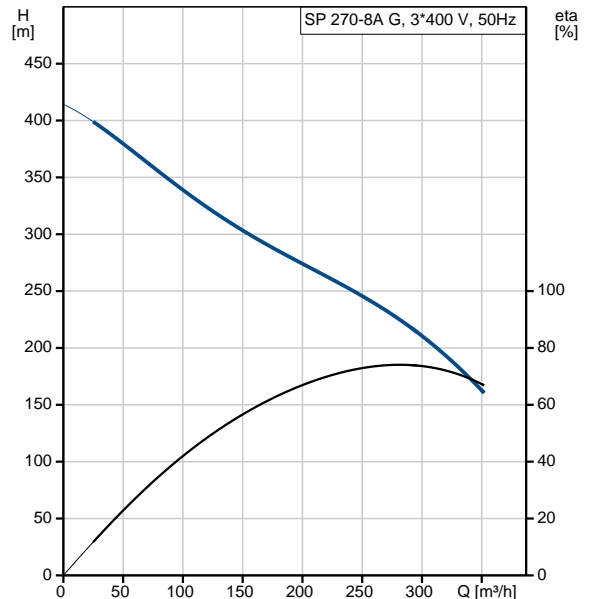


96430979 SP 270-8A G 50 Hz

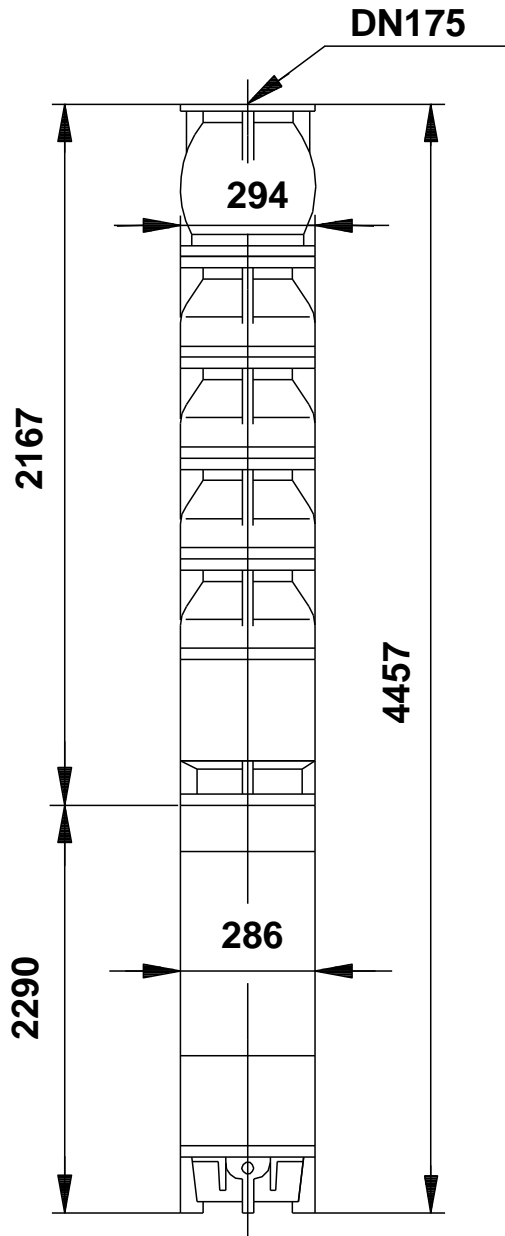

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

96430979 SP 270-8A G 50 Hz

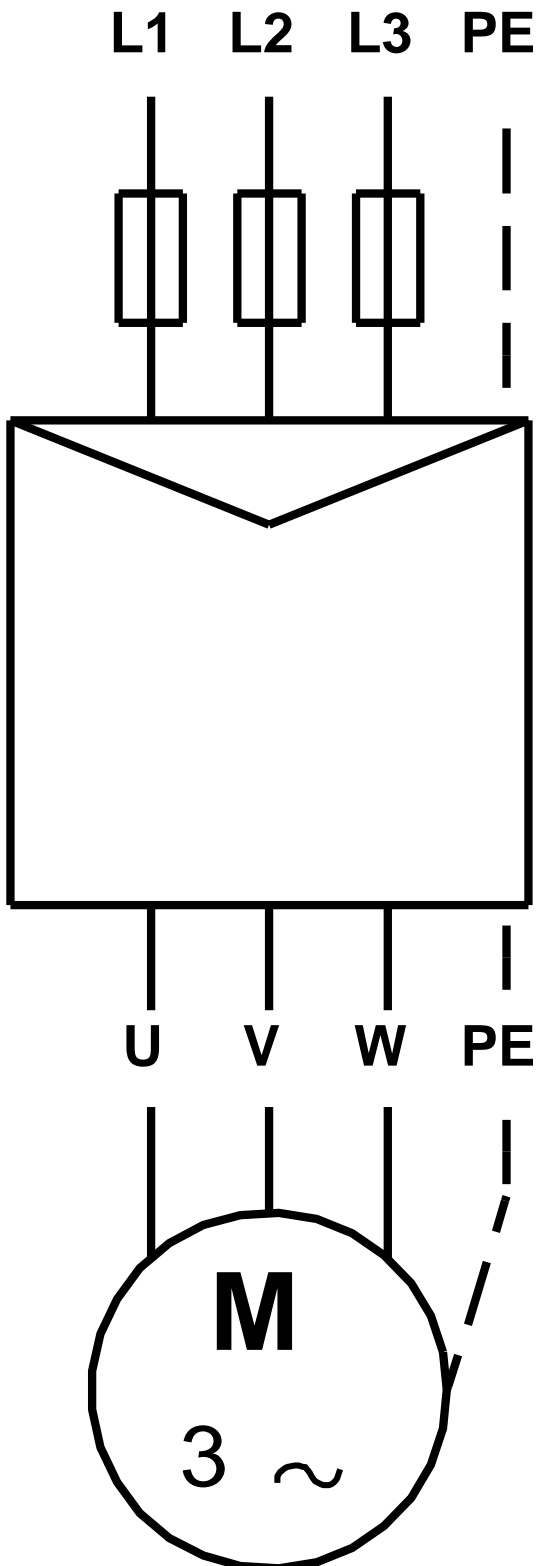

Note! All units are in [mm] unless others are stated.