


Qty.	Description
1	<p data-bbox="199 338 347 367">SP 360-3F G</p>  <p data-bbox="592 770 1075 795" style="text-align: center;">Note! Product picture may differ from actual product</p> <p data-bbox="199 801 469 831">Product No.: 96431013</p> <p data-bbox="199 831 1453 884">Multi-stage submersible pump for raw water supply, groundwater lowering, pressure boosting and various industrial jobs.</p> <p data-bbox="199 887 1289 918">The pump is suitable for pumping clean, thin, non-aggressive liquids without solid particles or fibres.</p> <p data-bbox="199 947 1431 1001">Pump: The pump is made entirely of Cast iron DIN W.-Nr. EN-JL1040 and suitable for horizontal installation.</p> <p data-bbox="199 1005 743 1037">The pump is fitted with a built-in non-return valve.</p> <p data-bbox="199 1066 1415 1120">Phase: The motor is a 3-phase motor with sand shield, liquid-lubricated bearings and pressure equalizing diaphragm.</p> <p data-bbox="199 1124 1072 1155">Performance test according to ISO9906 2012 Grade 3B is available on request.</p> <p data-bbox="199 1184 699 1361">Liquid: Pumped liquid: Water Maximum liquid temperature: 40 °C Max liquid t at 0.15 m/sec: 25 °C Selected liquid temperature: 20 °C Density: 998.2 kg/m³</p> <p data-bbox="199 1391 764 1538">Technical: Type of impeller: F Shaft seal for motor: CER/CARBON Curve tolerance: ISO9906:2012 3B Motor version: T30</p> <p data-bbox="199 1568 804 1805">Materials: Pump: Cast iron EN-JL1040 Impeller: Zinc-free bronze DIN W.-Nr. 2.1050.01 Motor: Cast iron DIN W.-Nr. 0.6025 ASTM 35-40</p> <p data-bbox="199 1834 647 1955">Installation: Flange standard: DIN Pump outlet: DN175 Motor diameter: 10 inch</p> <p data-bbox="199 1984 695 2103">Electrical data: Motor type: MMS10000 Rated power - P2: 132 kW Mains frequency: 50 Hz</p>



Company name:

Created by:

Phone:

Date:


12/11/2020

Qty.	Description
------	-------------


Rated voltage:	3 x 380-400-415 V
Rated current:	275-270-270 A
Cos phi - power factor:	0.87-0.84-0.81
Rated speed:	2900-2910-2920 rpm
Start. method:	direct-on-line
Enclosure class (IEC 34-5):	IP68
Built-in temp. transmitter:	no
Motor No:	96430680
Windings:	PVC

Others:	
Net weight:	630 kg
Shipping volume:	0.705 m ³
Country of origin:	IT
Custom tariff no.:	84137029



96431013 SP 360-3F G 50 Hz

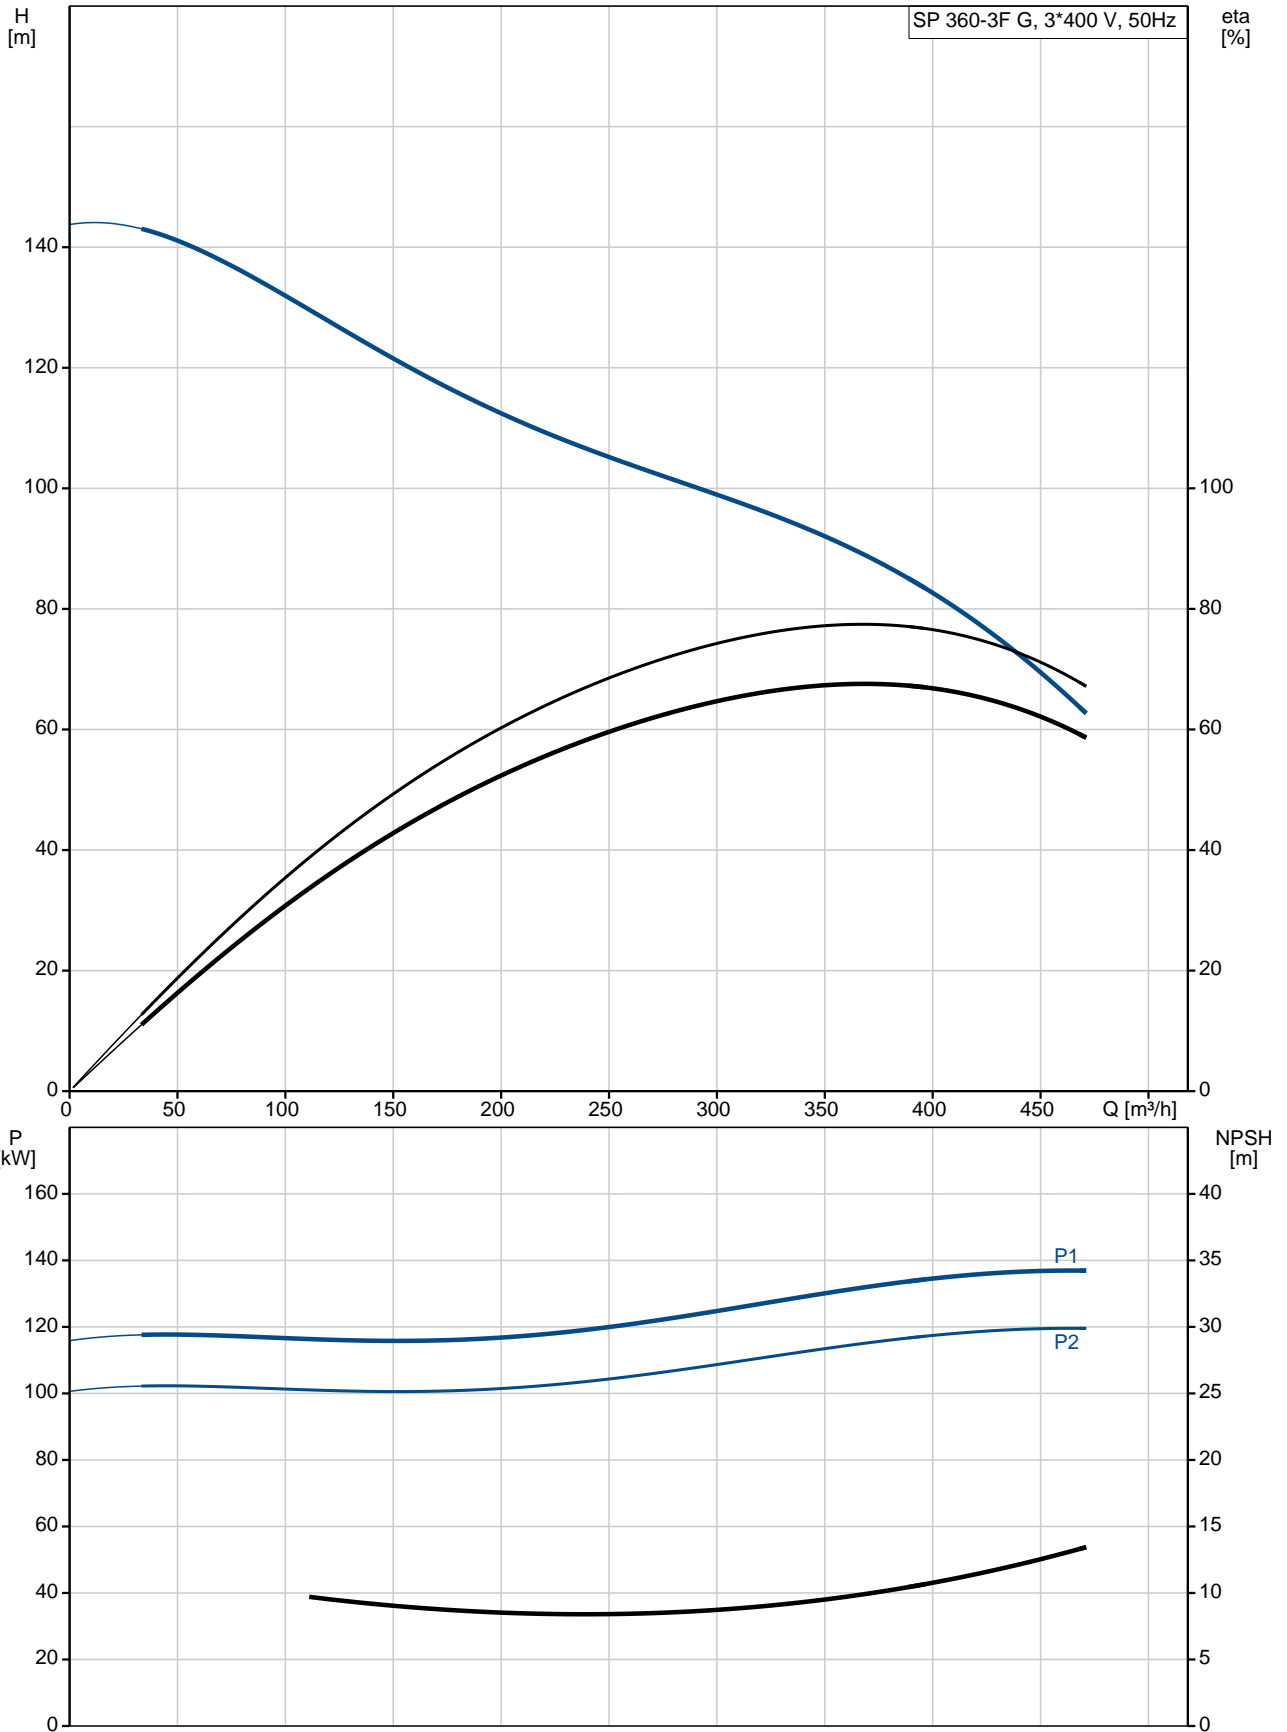

96431013 SP 360-3F G 50 Hz

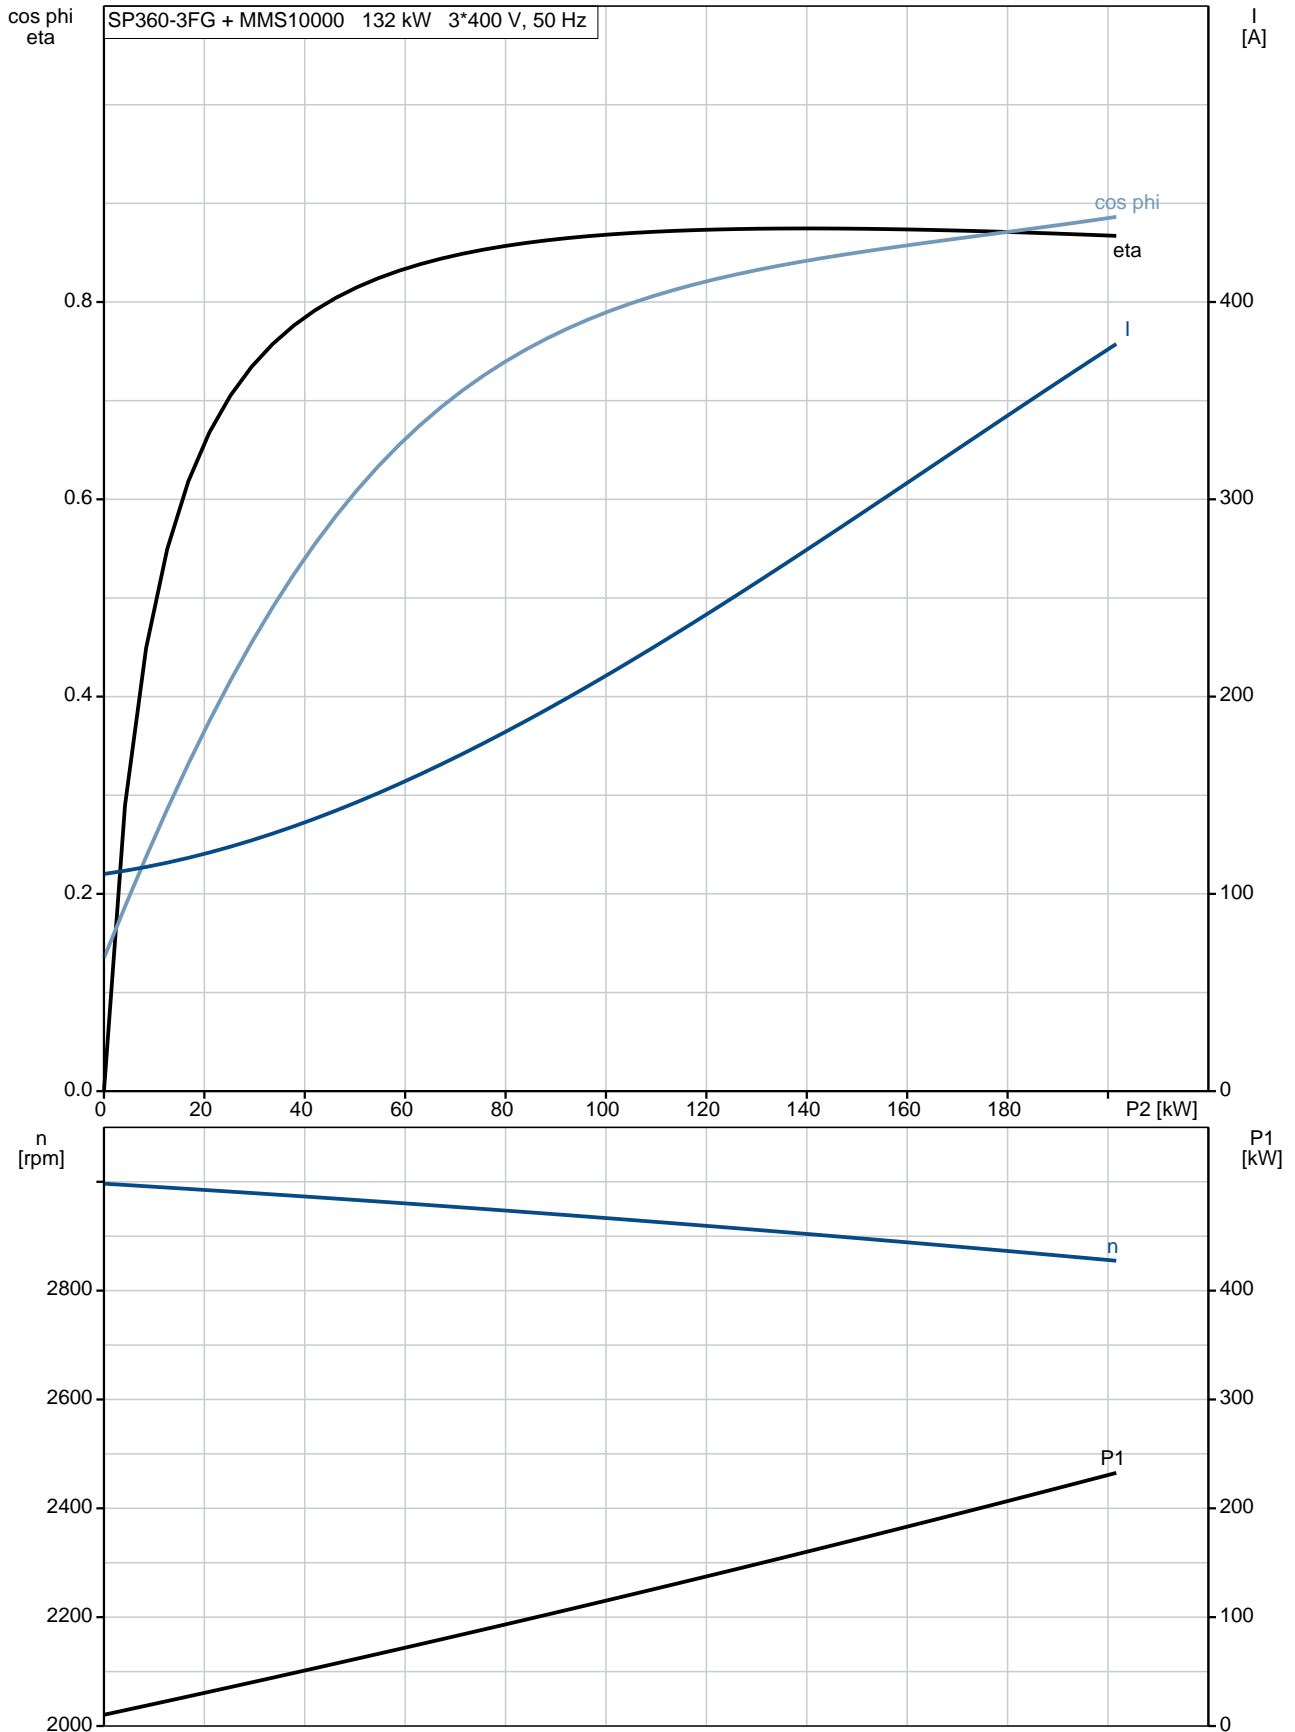

96431013 SP 360-3F G 50 Hz

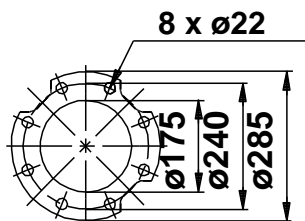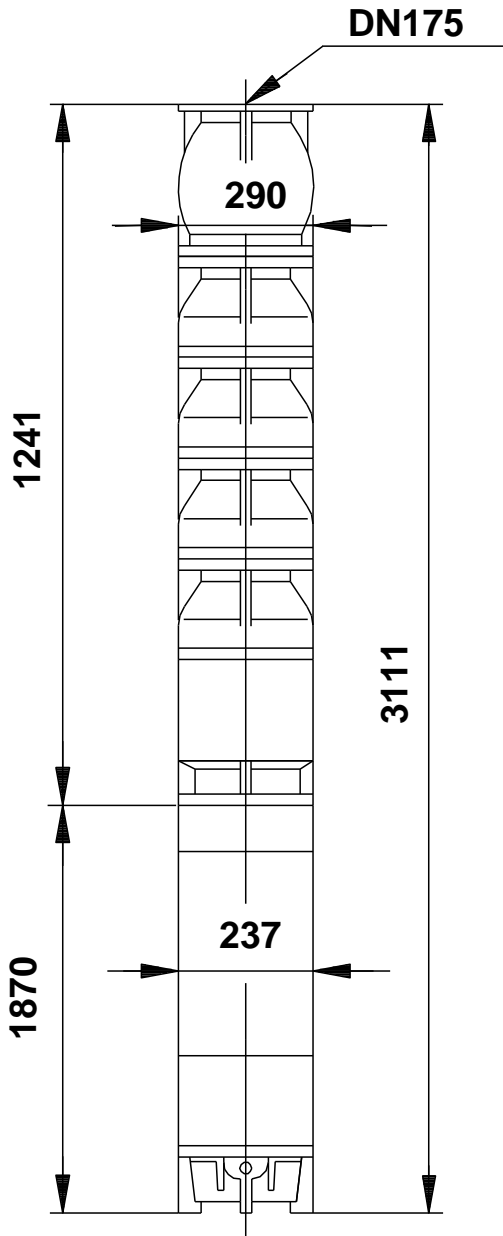

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

96431013 SP 360-3F G 50 Hz



Note! All units are in [mm] unless others are stated.