

**Qty. Description**

1 SQ 2-70



**Note! Product picture may differ from actual product**

Product No.: [96510200](#)

3" multi-stage, submersible pump designed for domestic water supply, liquid transfer in tanks, irrigation and environmental applications. The pump has "floating" impellers, each with its own tungsten carbide/ceramic bearing.

The pump features soft starting and protection against dry-running, upthrust, overvoltage, undervoltage, overload and overtemperature.

The motor is a single-phase motor of the permanent magnet rotor type ensuring optimum efficiency within a wide load range.

The motor is fitted with a replaceable end cover with socket.

**Liquid:**

Pumped liquid:	Water
Maximum liquid temperature:	35 °C
Max liquid t at 0.15 m/sec:	35 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m <sup>3</sup>

**Technical:**

Pump speed on which pump data are based:	10700 rpm
Rated flow:	2 m <sup>3</sup> /h
Rated head:	71 m
Approvals on motor nameplate:	CE,UL,CUL
Curve tolerance:	ISO9906:2012 3B

**Materials:**

Pump:	Polyamide / Stainless steel DIN W.-Nr. 1.4301 AISI 304
Impeller:	Polyamide
Motor:	Stainless steel DIN W.-Nr. 1.4301 AISI 304

**Installation:**

Pump outlet:	Rp1 1/4
Minimum borehole diameter:	76 mm

**Electrical data:**

Motor type:	MS3
Power input - P1:	1.65 kW



Company name:

Created by:


Phone:

Date:





09/11/2020

Qty.	Description
	Rated power - P2: 1.15 kW
	Power input P3: 0.91 kW
	Mains frequency: 50 Hz
	Rated voltage: 1 x 200-240 V
	Rated current: 8.4 A
	Power factor: 1.00
	Rated speed: 10700 rpm
	Start. method: direct-on-line
	Enclosure class (IEC 34-5): IP68
	Insulation class (IEC 85): F
	Length of cable: 1.5 m
	Motor No: 96160851
	Others:
	Net weight: 5.4 kg
	Gross weight: 5.7 kg
	Shipping volume: 0.009 m <sup>3</sup>
	Danish VVS No.: 388432470
	Finnish LVI No.: 4762611
	Norwegian NRF no.: 9041313
	Country of origin: MX
	Custom tariff no.: 84137029

## 96510200 SQ 2-70 50 Hz

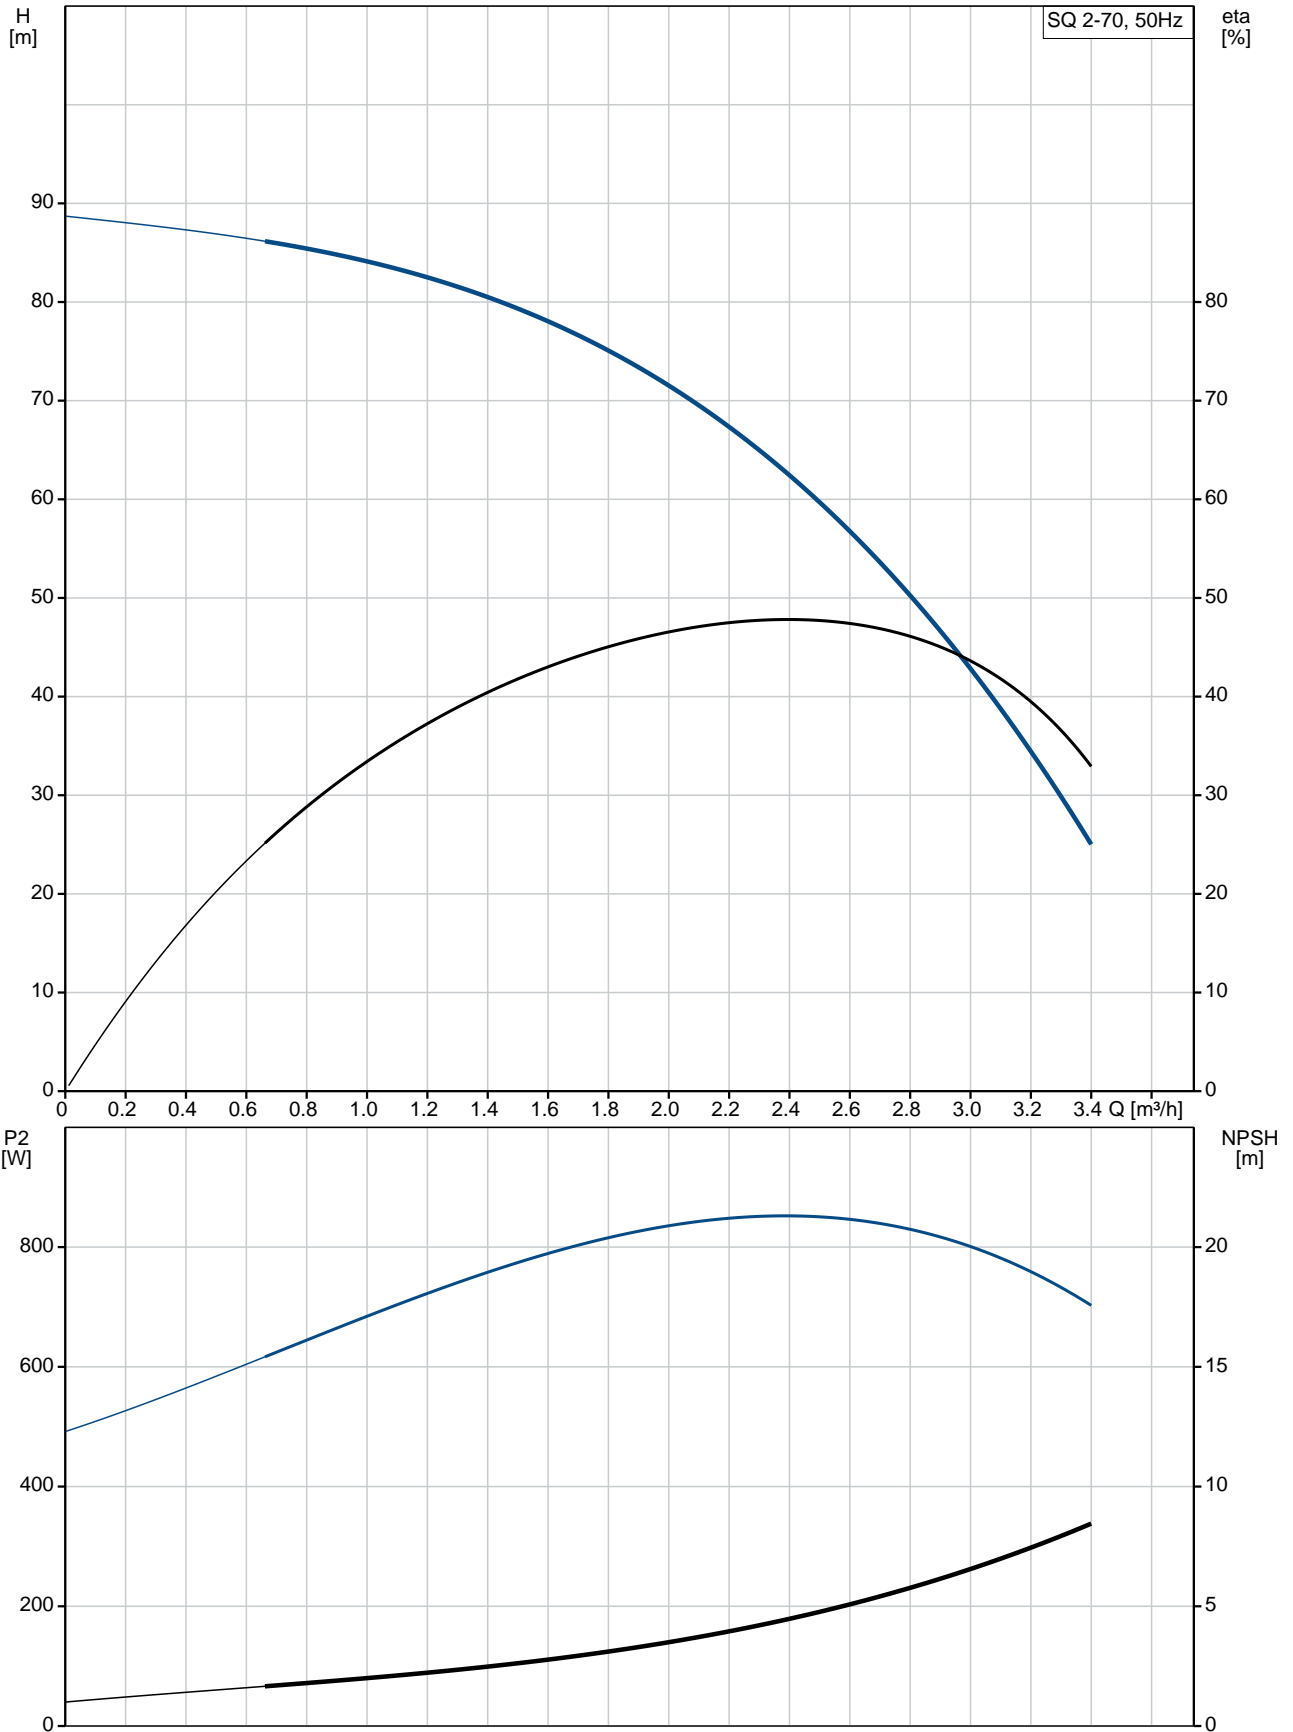

Description	Value
<b>General information:</b>	
Product name:	SQ 2-70
Product No:	96510200
EAN number:	5700396504223
Price:	GBP 1080
<b>Technical:</b>	
Pump speed on which pump data are based:	10700 rpm
Rated flow:	2 m <sup>3</sup> /h
Rated head:	71 m
Stages:	4
Approvals on motor nameplate:	CE,UL,CUL
Curve tolerance:	ISO9906:2012 3B
Pump No:	96080394
Model:	B
Valve:	pump with built-in non-return valve
<b>Materials:</b>	
Pump:	Polyamide / Stainless steel
Pump:	DIN W.-Nr. 1.4301
Pump:	AISI 304
Impeller:	Polyamide
Motor:	Stainless steel
Motor:	DIN W.-Nr. 1.4301
Motor:	AISI 304
<b>Installation:</b>	
Pump outlet:	Rp1 1/4
Minimum borehole diameter:	76 mm
<b>Liquid:</b>	
Pumped liquid:	Water
Maximum liquid temperature:	35 °C
Max liquid t at 0.15 m/sec:	35 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m <sup>3</sup>
<b>Electrical data:</b>	
Motor type:	MS3
Power input - P1:	1.65 kW
Rated power - P2:	1.15 kW
Power input P3:	0.91 kW
Mains frequency:	50 Hz
Rated voltage:	1 x 200-240 V
Rated current:	8.4 A
Power factor:	1.00
Rated speed:	10700 rpm
Start. method:	direct-on-line
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	F
Motor protec:	Y
Thermal protec:	internal
Length of cable:	1.5 m
Motor No:	96160851
<b>Controls:</b>	
CU 300/CU 301:	no communication possible
<b>Others:</b>	
Net weight:	5.4 kg
Gross weight:	5.7 kg
Shipping volume:	0.009 m <sup>3</sup>
Sales region:	EU/S-AMREG/APREG
Danish VVS No.:	388432470

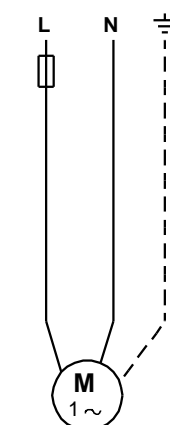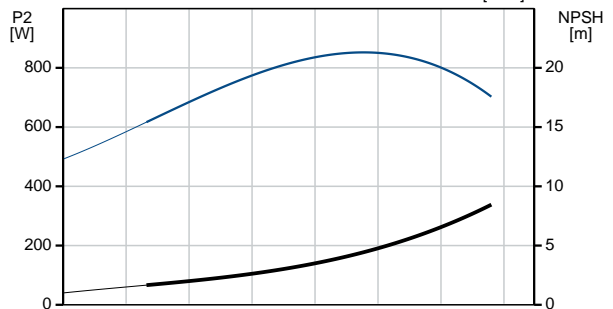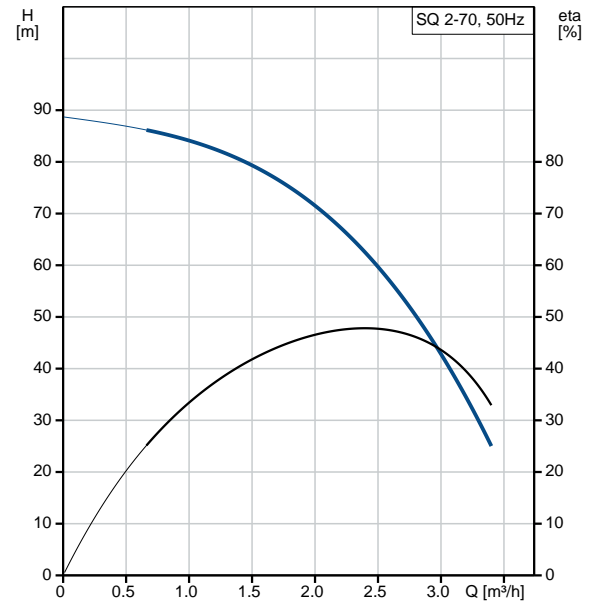



Company name:


Created by:

Phone:

Date: 09/11/2020


Description	Value
Finnish LVI No.:	4762611
Norwegian NRF no.:	9041313
Country of origin:	MX
Custom tariff no.:	84137029

**96510200 SQ 2-70 50 Hz**

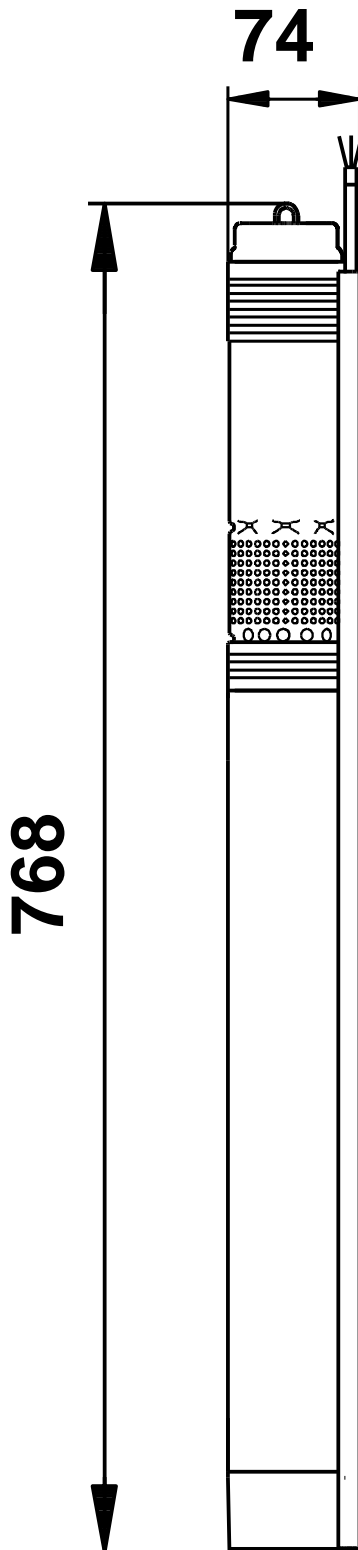

Note! All units are in [mm] unless others are stated.  
Disclaimer: This simplified dimensional drawing does not show all details.

**96510200 SQ 2-70 50 Hz**

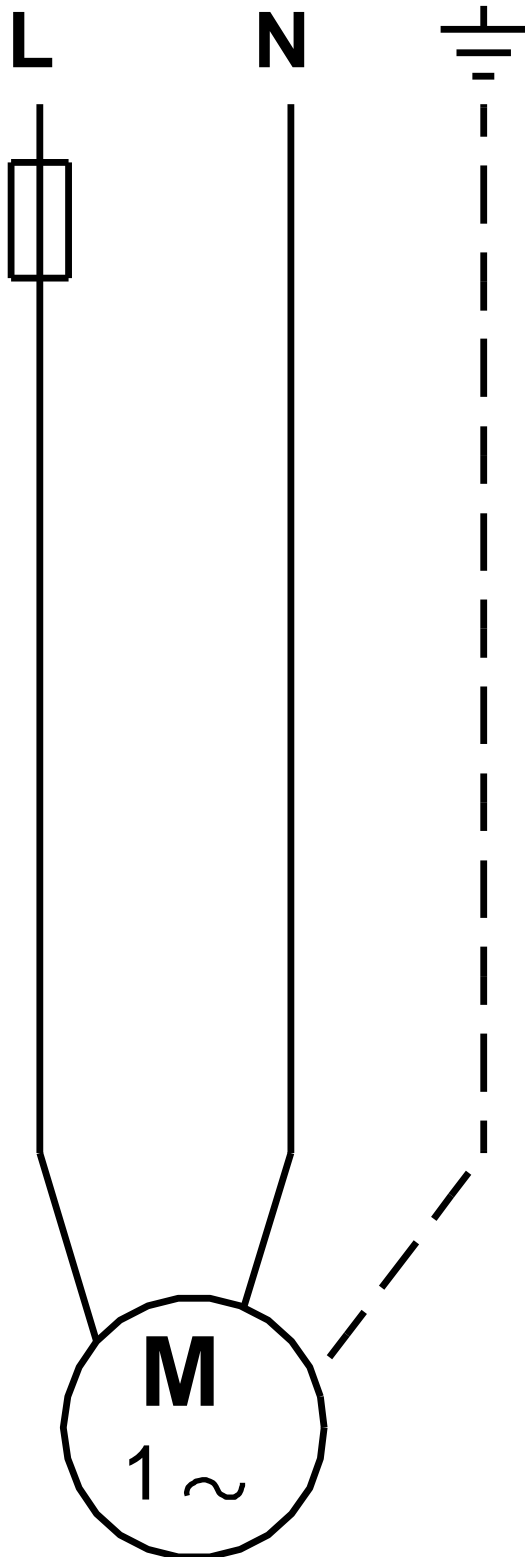

Note! All units are in [mm] unless others are stated.