
	GRUNDFOS 🕅	Company nam Created by: Phone:	ie:					
		Date:	02/01/2020					
Qty.	Description							
1	MAGNA3 40-180 F N							
	Note! Product picture may differ from actual product							
	Product No.: 97924353							
	The Grundfos MAGNA3 is a circulator pump with permanent magnet motor that will fit both heating, cooling and domestic hot water circulation applications perfectly, making it the obvious choice for almost any building project – old or new.							
	With its unrivalled efficiency, all-encompassing range replacing system components, the MAGNA3 is ideal for create high-performance systems for buildings.	and built-in commu or building owners,	unication capabilities plus functionalities engineers and specifiers looking to					
	The MAGNA3 is a canned-rotor type, i.e. pump and m two gaskets for sealing. The bearings are lubricated by	otor form an integr y the pumped liqui	al unit without shaft seal and with only d.					
	The innovative clamp with only one screw enables eas	sy repositioning of	the pump head.					
	The innovative clamp with only one screw enables eas The MAGNA3 is a pump with no maintenance required							



Printed from Grundfos Product Centre [2019.08.002]

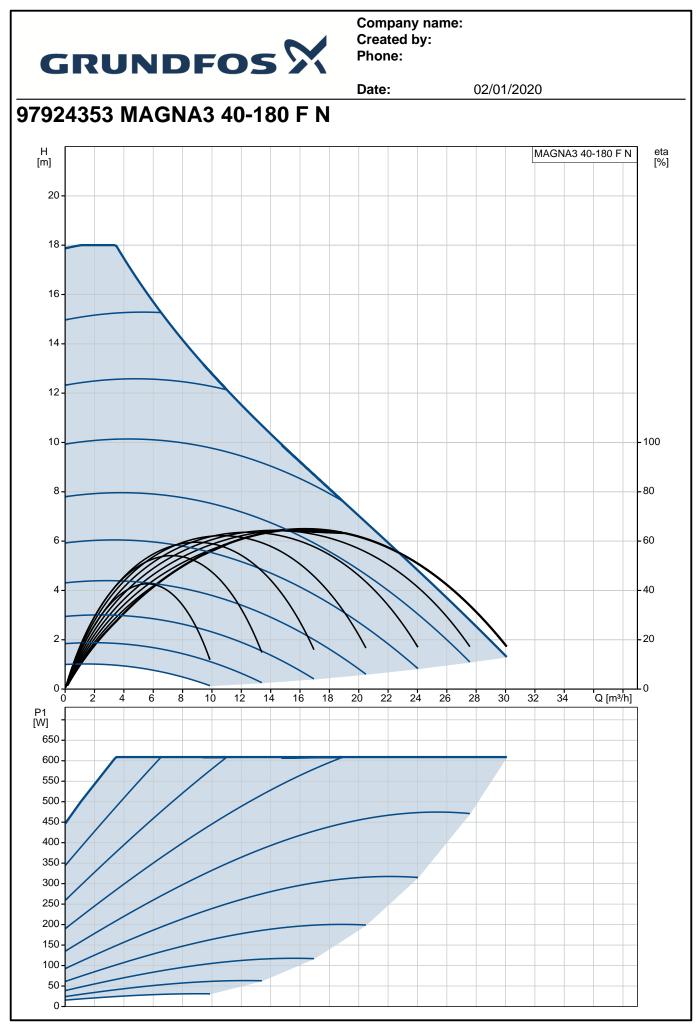

Company name: Created by: Phone:

	·	02/01/2020			
Description Value		H [m]		MAGNA3 40-180 F N	eta [%]
General information:		20 -			
Product name:	MAGNA3 40-180 F N	18 -			
Product No:	97924353				
EAN number:	5710626494293	16 -			_
	5710626494293		+ $ $ $ $		
Price:	3.459,00 GBP	14 -			_
Technical:					
Rated flow:	14.1 m³/h	12-			-
Rated head:	9.6 m				
Head max:	180 dm	10-			- 100
TF class:	110	8 -			- 80
Approvals on nameplate:	CE,VDE,EAC,CN ROHS,WEEE	6-			- 60
Model:	D				
Materials:		4-			- 40
Pump housing:	Stainless steel		TUT		
	EN 1.4308	2-	J J V L	1, 1, 1	- 20
	ASTM 351 CF8		$\overline{)}$		\Box_0
Impeller:	PES 30%GF	0 5	10 15 20	25 30 Q [m³/h]	_
Installation:	0 00/001	P1 - [W]			1
Range of ambient temperature:	0 40 °C	600 -			-
Maximum operating pressure:	10 bar	/			
Flange standard:	DIN	500 -			
Pipe connection:	DN 40	400 -			-
Pressure rating:	PN6/10	300 -			
Port-to-port length:		_ (/)			
Liquid:	250 mm	200 -			
	Water	100-			_
Pumped liquid:					
Liquid temperature range:	-10 110 °C	0			
Selected liquid temperature:	60 °C				
Density at selected liquid temperature:	983.2 kg/m³	164	369 65 30)4	
Electrical data:	10 000 11/	- 577		150 84	1
Power input - P1:	16 609 W	—		40	
Mains frequency:	50 / 60 Hz				Δ
Rated voltage:	1 x 230 V				¥
Maximum current consumption:	0.18 2.78 A	73	83	5 <u>100/110</u> 100/110	4
Enclosure class (IEC 34-5):	X4D	106 128	_	Here and the second sec	*
Insulation class (IEC 85):	F				
Others:					
Energy (EEI):	0.17				
Net weight:	16.7 kg				
Gross weight:	18.2 kg				
Shipping volume:	0.039 m ³				
Danish VVS No.:	380982418				
Swedish RSK No.:	5803220	Example of mains-con with mains switch, bac	nected motor kup fuse and additional protection		
Country of origin:	DE	<u> </u>		_	
Custom tariff no.:	84137030	L			
		N			
		¢			
			Digital		
			Inputs		
			2	T RELATION	
			NC NC	RELAY AC	
			0	№	
			Analog extern		