

Company name: Created by: Phone:

**Date:** 02/01/2020

Qty. | Description

1 MAGNA3 50-60 F N



Note! Product picture may differ from actual product

Product No.: 97924355

The Grundfos MAGNA3 is a circulator pump with permanent magnet motor that will fit both heating, cooling and domestic hot water circulation applications perfectly, making it the obvious choice for almost any building project – old or new.

With its unrivalled efficiency, all-encompassing range and built-in communication capabilities plus functionalities replacing system components, the MAGNA3 is ideal for building owners, engineers and specifiers looking to create high-performance systems for buildings.

The MAGNA3 is a canned-rotor type, i.e. pump and motor form an integral unit without shaft seal and with only two gaskets for sealing. The bearings are lubricated by the pumped liquid.

The innovative clamp with only one screw enables easy repositioning of the pump head.


The MAGNA3 is a pump with no maintenance requirements and with extremely low Life Cycle Cost.



Company name: Created by: Phone:

**Date:** 02/01/2020

## 97924355 MAGNA3 50-60 F N

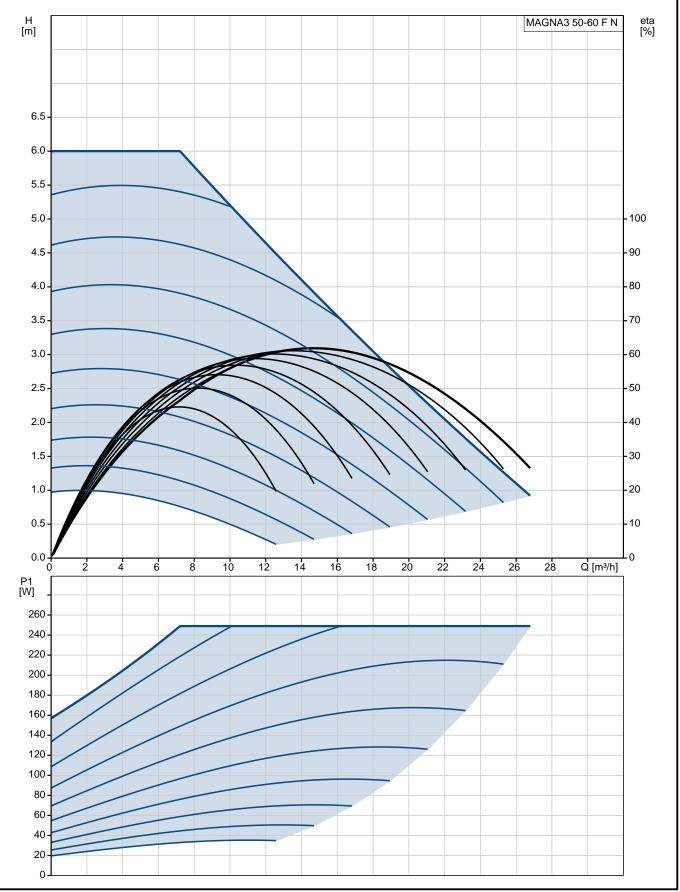



Company name: Created by: Phone:

**Date:** 02/01/2020

Description	Value
General information:	14.40
Product name:	MAGNA3 50-60 F N
Product No:	97924355
EAN number:	5710626494316
E/ II TIGITISST.	5710626494316
Price:	2.945,00 GBP
Technical:	2.545,00 GBI
Rated flow:	13.7 m³/h
Rated head:	4.3 m
Head max:	4.3 III 60 dm
TF class:	110
TE Class:	
Approvals on nameplate:	CE,VDE,EAC,CN ROHS,WEEE
Model:	D
Materials:	
Pump housing:	Stainless steel
	EN 1.4308
	ASTM 351 CF8
Impeller:	PES 30%GF
Installation:	
Range of ambient temperature:	0 40 °C
Maximum operating pressure:	10 bar
Flange standard:	DIN
Pipe connection:	DN 50
Pressure rating:	PN6/10
Port-to-port length:	240 mm
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-10 110 °C
Selected liquid temperature:	60 °C
Density at selected liquid	983.2 kg/m³
temperature:	
Electrical data:	
Power input - P1:	21 249 W
Mains frequency:	50 / 60 Hz
Rated voltage:	1 x 230 V
Maximum current consumption:	0.23 1.18 A
Enclosure class (IEC 34-5):	X4D
Insulation class (IEC 85):	F
Others:	
Energy (EEI):	0.19
Net weight:	18.9 kg
Gross weight:	20.9 kg
Shipping volume:	0.046 m³
Danish VVS No.:	380983506
Swedish RSK No.:	J0UJZZZ
Swedish RSK No.: Country of origin:	5803222 DE

