
	GRUNDFOS Company name: Created by: Phone:						
		Date:	02/01/2020				
Qty.	Description						
1	MAGNA3 50-120 F N						
	Note! Product picture may differ from actual product						
	Product No.: 97924358						
	The Grundfos MAGNA3 is a circulator pump with perm domestic hot water circulation applications perfectly, n old or new.	nanent magnet mo naking it the obvior	otor that will fit both heating, cooling and us choice for almost any building project –				
	With its unrivalled efficiency, all-encompassing range replacing system components, the MAGNA3 is ideal for create high-performance systems for buildings.	and built-in commo or building owners	unication capabilities plus functionalities , engineers and specifiers looking to				
	The MAGNA3 is a canned-rotor type, i.e. pump and m two gaskets for sealing. The bearings are lubricated b	otor form an integ y the pumped liqui	ral unit without shaft seal and with only d.				
	The innovative clamp with only one screw enables eas	sy repositioning of	the pump head.				
	The innovative clamp with only one screw enables eas The MAGNA3 is a pump with no maintenance require						




Company name: Created by: Phone:

Date:



97924358 MAGNA3 50-120 F N

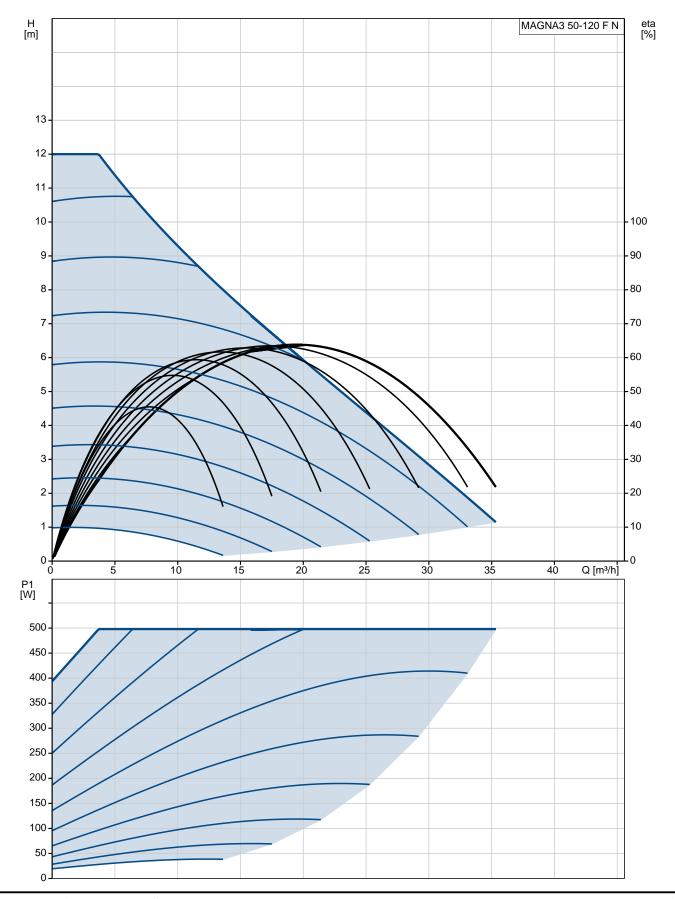

Printed from Grundfos Product Centre [2019.08.002]



Company name: Created by: Phone:

		Date:	02/01/2020
Description	Value	H [m]	MAGNA3 50-120 F N eta [%]
General information:			
Product name:	MAGNA3 50-120 F N		
Product No:	97924358	13 -	
EAN number:	5710626494347	12 -	
	5710626494347	11	
Price:	3.623,00 GBP		
Technical:	5.025,00 001	10 -	- 100
Rated flow:	18.3 m³/h	9-	- 90
		8-	
Rated head:	6.8 m	7-	
Head max:	120 dm		
FF class:	110	6	-60
Approvals on nameplate:	CE,VDE,EAC,CN ROHS,WEEE	5-	
Model:	D		
Materials:		3-	
Pump housing:	Stainless steel	2-	20
	EN 1.4308	1-	10
	ASTM 351 CF8	0	0
mpeller:	PES 30%GF	0 5	10 15 20 25 30 35 Q [m³/h]
nstallation:		P1 [W]	
Range of ambient temperature:	0 40 °C		
Maximum operating pressure:	10 bar		
Flange standard:	DIN	400 -	
Pipe connection:	DN 50		
	PN6/10		
Pressure rating:		200 -	
Port-to-port length:	280 mm		
Liquid:	Motor.	100-	
Pumped liquid:	Water	0	
Liquid temperature range:	-10 110 °C	0-	· · · · · · · · · · · · · · · · · · ·
Selected liquid temperature:	0° 00		
Density at selected liquid emperature:	983.2 kg/m³	164	376 72
Electrical data:		5777	
Power input - P1:	20 498 W		
Mains frequency:	50 / 60 Hz	- (
Rated voltage:	1 x 230 V	-	
Maximum current consumption:	0.22 2.3 A		
Enclosure class (IEC 34-5):	X4D	73	97
nsulation class (IEC 85):	F		
Others:			
Energy (EEI):	0.17		
Net weight:	18.9 kg		
Gross weight:	21.1 kg		
Shipping volume:	0.046 m ³		
Danish VVS No.:	380983512		
		Example of mains-conne	acted motor up fuse and additional protection
Swedish RSK No.:	5803224	with mains switch, back	up upe and availuations protection
Country of origin:	DE		
Custom tariff no.:	84137030	RCD/RCCB	
		<u> </u>	
			« <u> </u>
			R -
			Reday
			COLORING NO. 22