
	GRUNDFOS Company name: Created by: Phone:								
		Date:	02/01/2020						
Qty.	Description								
1	MAGNA3 50-150 F N								
	Note! Product picture may differ from actual product								
	Product No.: 97924359								
	The Grundfos MAGNA3 is a circulator pump with permanent magnet motor that will fit both heating, cooling and domestic hot water circulation applications perfectly, making it the obvious choice for almost any building project – old or new.								
	With its unrivalled efficiency, all-encompassing range replacing system components, the MAGNA3 is ideal for create high-performance systems for buildings.	and built-in con or building own	nmunication capabilities plus functionalities ers, engineers and specifiers looking to						
	The MAGNA3 is a canned-rotor type, i.e. pump and m two gaskets for sealing. The bearings are lubricated b	otor form an in y the pumped I	tegral unit without shaft seal and with only iquid.						
	The innovative clamp with only one screw enables eas	sy repositioning	g of the pump head.						
	The innovative clamp with only one screw enables eas The MAGNA3 is a pump with no maintenance require								



## Printed from Grundfos Product Centre [2019.08.002]

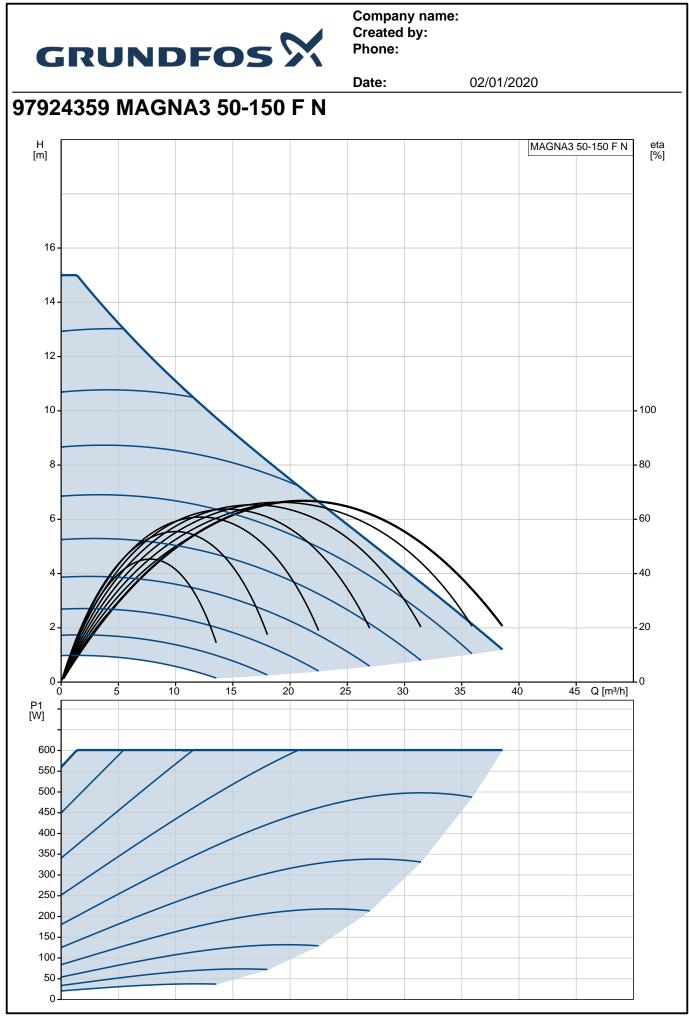

## Company name: Created by: Phone:

		Date:	02/01/2020		
Description	Value	H [m]		MAGNA3 50-150 F I	N e
General information:					
Product name:	MAGNA3 50-150 F N				
Product No:	97924359	16 -			
EAN number:	5710626494354				
	5710626494354	14 -			
Price:	4.174,00 GBP	-			
Technical:	,	12 -			_
Rated flow:	19.3 m³/h				
Rated head:	7.5 m	10 -			- 100
Head max:	150 dm				
TF class:	110	8-			- 80
Approvals on nameplate:	CE,VDE,EAC,CN ROHS,WEEE	6 -			- 60
Model:	D				
Model: Materials:	ט	4	ANN		- 40
	Otololoo t l		THM		
Pump housing:	Stainless steel	2-	4111		- 20
	EN 1.4308				
	ASTM 351 CF8	0	10 15 20 25	30 35 40 Q [m³/ł	
Impeller:	PES 30%GF	P1 -	10 13 20 25	50 55 40 Q [M³/f	
Installation:		P1 - [W]			
Range of ambient temperature:	0 40 °C	600 -			
Maximum operating pressure:	10 bar	500 -			_
Flange standard:	DIN	400 -	/ /		
Pipe connection:	DN 50	400-			
Pressure rating:	PN6/10	300 -			_
Port-to-port length:	280 mm	200 -			
Liquid:					
Pumped liquid:	Water	100 -			_
Liquid temperature range:	-10 110 °C	0			
Selected liquid temperature:	60 °C				
Density at selected liquid					
temperature:	983.2 kg/m³		376 72 3	04	
Electrical data:	00 004 144			165 102	
Power input - P1:	22 601 W			50	
Mains frequency:	50 / 60 Hz				
Rated voltage:	1 x 230 V		श्म∣ \\⊁'च		
Maximum current consumption:	0.23 2.75 A	73		¥ 110/12 110/12	
Enclosure class (IEC 34-5):	X4D	127 127		<b>H</b>	+I
Insulation class (IEC 85):	F				
Others:					
Energy (EEI):	0.18				
Net weight:	19.8 kg				
Gross weight:	22 kg				
Shipping volume:	0.046 m <sup>3</sup>				
Danish VVS No.:	380983515				
Swedish RSK No.:	5803226	Example of mains-conne with mains switch hack	ected motor up fuse and additional protection		
Country of origin:	DE				
Custom tariff no.:			<b>∍</b> -[† <b>-</b> ]-@		
	84137030		A construction of the second s		
			No c	Nn sr 00, 204 AC1 Art BELV2	
			Availed the extent of server		