
	GRUNDFOS 🕅	Company name: Created by: Phone:				
		Date:	02/01/2020			
Qty.	Description					
1	MAGNA3 65-40 F N					
	Note! Product picture may differ from actual product					
	Product No.: 97924361					
	The Grundfos MAGNA3 is a circulator pump with permanent magnet motor that will fit both heating, cooling and domestic hot water circulation applications perfectly, making it the obvious choice for almost any building project – old or new.					
	With its unrivalled efficiency, all-encompassing range a replacing system components, the MAGNA3 is ideal for create high-performance systems for buildings.	and built-in communic or building owners, en	cation capabilities plus functionalities igineers and specifiers looking to			
	The MAGNA3 is a canned-rotor type, i.e. pump and m two gaskets for sealing. The bearings are lubricated by	otor form an integral y the pumped liquid.	unit without shaft seal and with only			
	The innovative clamp with only one screw enables eas	sy repositioning of the	pump head.			
	The innovative clamp with only one screw enables eas The MAGNA3 is a pump with no maintenance requires					



Printed from Grundfos Product Centre [2019.08.002]

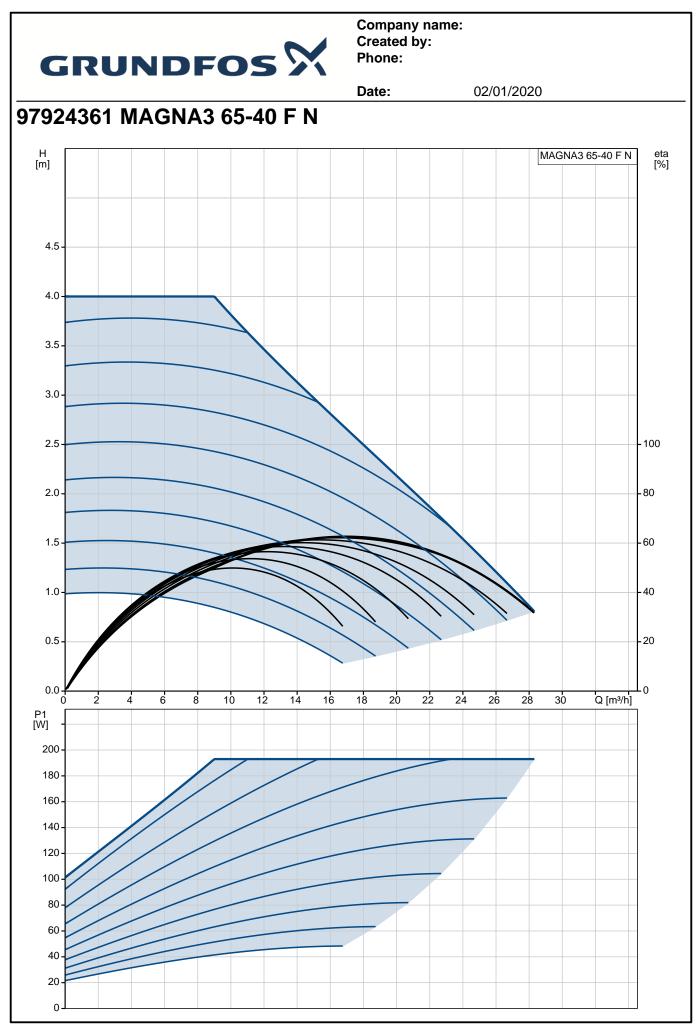

Company name: Created by: Phone:

		Date:	02/01/2020
Description	Value	H [m]	MAGNA3 65-40 F N
General information:			
Product name:	MAGNA3 65-40 F N		
Product No:	97924361	4.5 -	
EAN number:	5710626494378	4.0 -	
	5710626494378	4.0	
Price:	3.135,00 GBP	3.5 -	
Technical:			
Rated flow:	13.8 m³/h	3.0 -	
Rated head:	2.7 m	2.5	
Head max:	40 dm	2.5	
TF class:	110	2.0 -	
Approvals on nameplate:	CE,VDE,EAC,CN ROHS,WEEE	1.5	
Model:	D		
Materials:		1.0 -	
Pump housing:	Stainless steel	0.5 -	
-	EN 1.4308	0.5	
	ASTM 351 CF8	0.0	
Impeller:	PES 30%GF	0 5	10 15 20 25 Q [m³/h]
Installation:		P1 [W]	
Range of ambient temperature:	0 40 °C		
Maximum operating pressure:	10 bar		
Flange standard:	DIN	150 -	
Pipe connection:	DN 65		
Pressure rating:	PN6/10	100-	
Port-to-port length:	340 mm		
Liquid:		50 -	
Pumped liquid:	Water		
Liquid temperature range:	-10 110 °C	0	
Selected liquid temperature:	60 °C		
Density at selected liquid temperature:	983.2 kg/m³	164	386 74 312
Electrical data:			
Power input - P1:	21 193 W		
Mains frequency:	50 / 60 Hz		
Rated voltage:	1 x 230 V		
Maximum current consumption:	0.22 0.94 A		130/145
Enclosure class (IEC 34-5):	X4D	133 133	94
Insulation class (IEC 85):	F		
Others:			
Energy (EEI):	0.18		
Net weight:	21.7 kg		
Gross weight:	23.8 kg		
Shipping volume:	0.057 m ³		
Danish VVS No.:	380984604		
Swedish RSK No.:	5803228	Example of mains-conne with mains switch, backu	cted motor p fuse and additional protection
Country of origin:	DE	~	- T
Custom tariff no.:	84137030		
		N	
		¢	
			RELATION No. C
			Nan 2007 AC 34 AG Anna 2007 AC 34 AG Relation AC 34 AG New York State Action Action Action Action Action Action New York State Action Actio Actio Action Actio Actio Action Action Action Action Actio
			RELATION
			Siles

eta [%]

- 100 - 80

- 60 - 40 - 20 - 0