
	GRUNDFOS 🕅	Company name: Created by: Phone:				
		Date:	02/01/2020			
Qty.	Description					
1	MAGNA3 65-60 F N					
	Note! Product picture	may differ from actual pro	oduct			
	Note! Product picture may differ from actual product   Product No.: 97924362   The Grundfos MAGNA3 is a circulator pump with permanent magnet motor that will fit both heating, cooling and domestic hot water circulation applications perfectly, making it the obvious choice for almost any building project – old or new.					
	With its unrivalled efficiency, all-encompassing range a replacing system components, the MAGNA3 is ideal for create high-performance systems for buildings.	and built-in communic or building owners, en	cation capabilities plus functionalities igineers and specifiers looking to			
	The MAGNA3 is a canned-rotor type, i.e. pump and m two gaskets for sealing. The bearings are lubricated by	otor form an integral of the pumped liquid.	unit without shaft seal and with only			
	The innovative clamp with only one screw enables eas	sy repositioning of the	pump head.			
	The innovative clamp with only one screw enables eas The MAGNA3 is a pump with no maintenance requires					



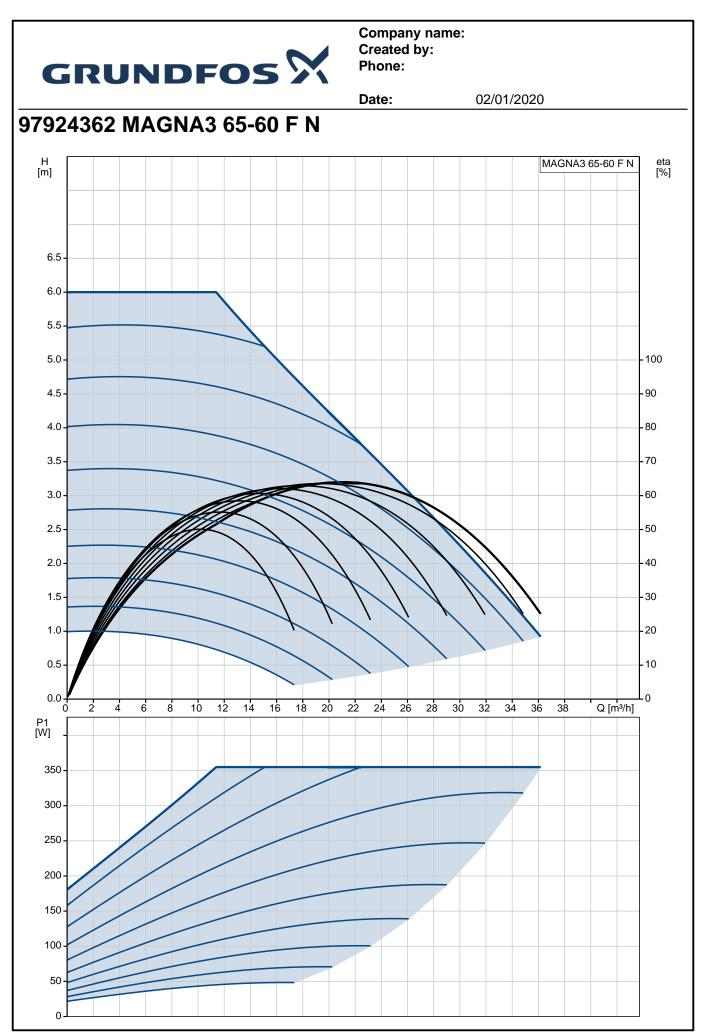

## Company name: Created by: Phone:

GRUND	FOSX		
		Date:	02/01/2020
Description	Value	H [m]	MAGNA3 65-60 F N
General information:			
Product name:	MAGNA3 65-60 F N		
Product No:	97924362	6.5 -	
EAN number:	5710626494385	6.0 -	
EAN NUMBER.			
	5710626494385	5.5 -	
Price:	3.581,00 GBP	5.0 -	- 100
Technical:		4.5 -	-90
Rated flow:	18.7 m³/h		
Rated head:	4.4 m	4.0	- 80
Head max:	60 dm	3.5 -	-70
TF class:	110	3.0 -	- 60
Approvals on nameplate:	CE,VDE,EAC,CN ROHS,WEEE	2.5 -	-50
Model:	D	2.0 -	
Materials:		1.5 -	
		1.0	
Pump housing:	Stainless steel		
	EN 1.4308	0.5 -	10
	ASTM 351 CF8	0.0	
Impeller:	PES 30%GF		10 15 20 25 30 35 Q [m <sup>3</sup> /h]
Installation:		P1	
Range of ambient temperature:	0 40 °C	350 -	
Maximum operating pressure:	10 bar	300 -	
Flange standard:	DIN	250 -	
Pipe connection:	DN 65	- 200 -	
Pressure rating:	PN6/10	150 -	
Port-to-port length:	340 mm		
Liquid:		100 -	
Pumped liquid:	Water	50 -	
Liquid temperature range:	-10 110 °C	0	
Selected liquid temperature:	60 °C		
Density at selected liquid temperature:	983.2 kg/m³	164	386 74 312
Electrical data:		5777	
Power input - P1:	20 355 W		
Mains frequency:	50 / 60 Hz		
Rated voltage:	1 x 230 V		
Maximum current consumption:	0.22 1.64 A		
Enclosure class (IEC 34-5):	X4D	73	94 130/145
		133 133	<b>•</b>
Insulation class (IEC 85):	F		
Others:			
Energy (EEI):	0.17		
Net weight:	21.7 kg		
Gross weight:	23.8 kg		
Shipping volume:	0.057 m <sup>3</sup>		
Danish VVS No.:	380984606		
		Example of mains-conr	nected motor
Swedish RSK No.:	5803229		kup fuse and additional protection
Country of origin:	DE		
Custom tariff no .:	84137030	RCD/RCCB	
			Nutr. 2 BOY AC 3A. ACT
			Avadog existence
			8 a 🕞 🚽