

Date: 14/10/2021

Qty. | Description

1 GT-U+ 100 PN10



Note! Product picture may differ from actual product

Product No.: 99082696

Grundfos GT-U+ 100 PN10 is a Bladder pressure tank, with a capacity of 100.0 I and Vertical installation. The tanks are approved for drinking water. The GT-U+ 100 PN10 is designed for a maximum operation pressure of 10 bar and a maximum liquid temperature of 90 °C.

The diaphragm is a chlorine-resistant 100 % butyl diaphragm with a precision-moulded copolymer polypropylene liner for superior air and water separation.

The tank has a FlowThru connection, which constantly flushes the tank while the pump is running.

This ensures that the water in the tank remains fresh and eliminates the risk of stagnant water during normal system operation.

The diaphragm is a chlorine-resistant 100 % butyl diaphragm with a precision-moulded copolymer polypropylene liner for superior air and water separation.

The tank has a FlowThru connection, which constantly flushes the tank while the pump is running.

This ensures that the water in the tank remains fresh and eliminates the risk of stagnant water during normal system operation.

The tanks have a non-replaceable diaphragm that is pre-charged with nitrogen (1.5 bar).

The tanks have a non-toxic butyl rubber diaphragm, dividing the tank chamber into two compartments.

The upper compartment contains compressed nitrogen.

The lower compartment has a liner of polypropylene (PP) and is filled with water from the pump.

A pressure tank ensures controlled pressure in the water supply and thereby limits the switching frequency of the pump in case of low water consumption or leakage loss.

The result is increased comfort in your installation by limiting the start/stop frequency of your pump, and it increases system comfort by compensating for pressure drops when a tap is opened, while reducing problems with water hammer in the pipework.

Liquid:

Liquid max temp: 90 °C

Technical:

Membrane type: Bladder

Materials:



Date: 14/10/2021

Qty. | Description

Basic: Carbon steel

Installation:

Maximum operating pressure: 10 bar Type of connection: G Size of connection: 1 inch Size: 100.0


Others:

Net weight:23 kgGross weight:28.5 kgApplicat. typ:StandardCountry of origin:DECustom tariff no.:73102990



Date: 14/10/2021


Description	Value	
General information:		
Product name:	GT-U+ 100 PN10	
Product No:	99082696	
EAN number:	5712606401581	
Price:	GBP 300	
Technical:		
Membrane type:	Bladder	
Materials:		
Basic:	Carbon steel	
Installation:		
Maximum operating pressure:	10 bar	
Pre-pressure:	4 bar	
Type of connection:	G	
Size of connection:	1 inch	
Installation:	Vertical	
Size:	100.0	
Liquid:		
Liquid max temp:	90 °C	
Others:		
Net weight:	23 kg	
Gross weight:	28.5 kg	
Applicat. typ:	Standard	
Country of origin:	DE	
Custom tariff no.:	73102990	

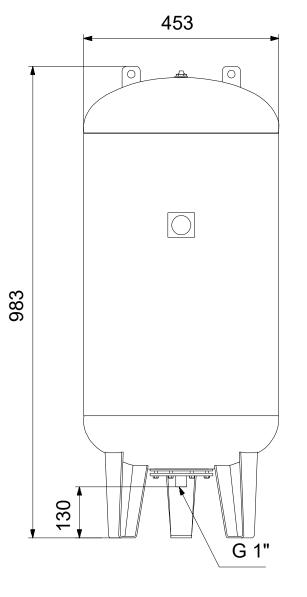



14/10/2021 Date:

99082696 GT-U+ 100 PN10

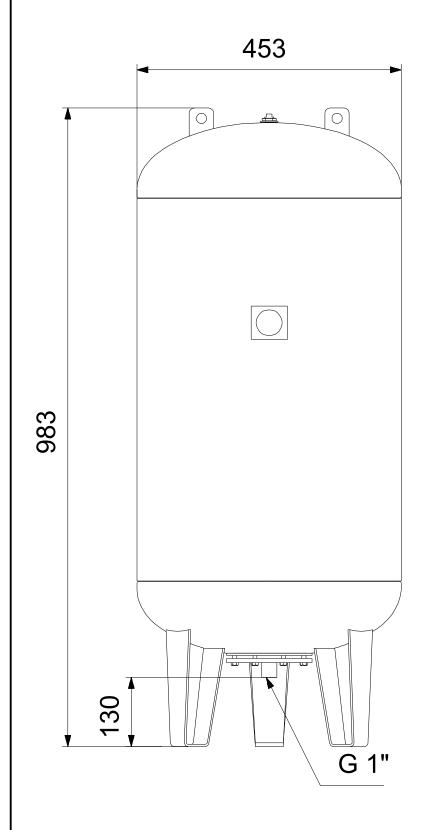

Note! All units are in [mm] unless others are stated. Disclaimer: This simplified dimensional drawing does not show all details.