

Elettropompe sommergibili SEMISOM L - SL per acque luride


Electric submersible pumps SEMISOM L - SL for sewage water



Caratteristiche tecniche 2 poli 50 Hz • Performance characteristics 2 poles 50 Hz


Monofase • Single-Phase 230 V 50 Hz Trifase • Three-Phase 400 V 50 Hz	Caratt. Nominali Nominal Charact. HP KW A 1~ A 3~	Cavo 450 V Cable µF m DNM	Passaggio solidi Ø Ø Solids passage	P o r t a t a • F l o w																		
				m ³ /h	0	1,8	6	9	12	15	18	21	24	27	30	39						
				l/min	0	30	100	150	200	250	300	350	400	450	500	650						
														Prevalenza manom. totale in metri • Total manometric head in meters								
Girante Arretrata • Vortex Impeller																						
SEMISOM 265 L C/M/T	0,75 0,55 4,2 1,7	16 5	1"1/2 40	8,5	8	6,5	5,5	4	3	1												
SEMISOM 365 L C/M/T	1 0,75 5,5 2,3	20 5	1"1/2 40	10,5	10	8,5	7,5	6,5	5,5	4	2	0,5										
SEMISOM 450 L C/M/T	1,5 1,1 7,3 2,7	20 5	2" 50	10,5	10	9,5	9	8	7,5	6,5	5,5	4,5	3,5	2								
Girante Bicanale • Double-Channel Impeller																						
SEMISOM 262 SL C/M/T	0,75 0,55 4,2 1,7	16 5	2" 32	10,5	10	9	8	7	6	4,5	3	1										
SEMISOM 635 SL C/M/T	1,5 1,1 7,3 2,7	20 5	2" 32	15	14,5	13,5	13	12	11	10	9	7,5	6,5	5	0							

C : Monofase con condensatore interno e galleggiante • C: Single-phase with internal capacitor and float switch
M : Monofase con condensatore esterno con o senza galleggiante • M: Single-phase with external capacitor with or without float switch
T : Trifase • T: Three-phase

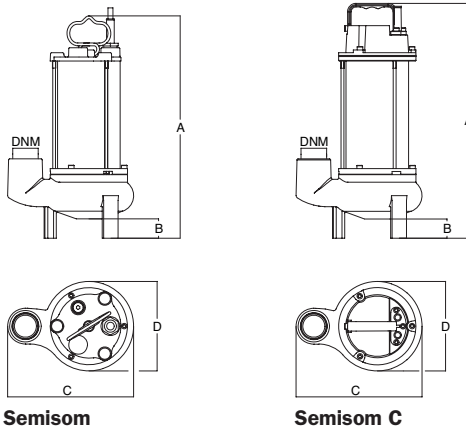

Tipo Type	Misure mm Dimensions mm				Peso Weight Kg
	A	B	C	D	
Semisom 265 L C	426	50	230	162	16,5
Semisom 365 L C	466	50	230	162	19,1
Semisom 450 L C	490	50	260	183	22,0
Semisom 262 SL C	426	60	250	172	19,2
Semisom 635 SL C	466	60	250	172	21,9
Semisom 265 L M/T	400	50	230	162	13,6
Semisom 365 L M/T	440	50	230	162	16,6
Semisom 450 L M/T	464	50	260	183	19,4
Semisom 262 SL M/T	400	60	250	172	16,7
Semisom 635 SL M/T	440	60	250	172	19,3

Semisom 265 L - 365 L - 450 L

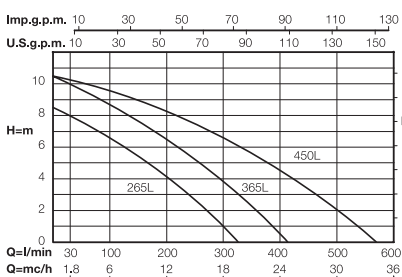

Semisom 262 SL - 635 SL

