

Customer	Date	12/7/2020
Contact	Project	
Phone number	Project no.	
Email		

## ESHE 32-160/22/P25HSSA

101860800

### Operating data

Pump type	Single head pump	Fluid	Water, pure
No. of pumps / Reserve	1 / 0	Operating temperature t A	°C 4
Nominal flow	l/s 0	pH-value at t A	7
Nominal head	m 0	Density at t A	kg/m <sup>3</sup> 1000
Static head	m 0	Kin. viscosity at t A	mm <sup>2</sup> /s 1.569
Inlet pressure	kPa 0	Vapor pressure at t A	kPa 100
Environmental temperature	°C 20	Solids	0
Available system NPSH	m 0	Altitude	m 0

### Pump data

Make	Lowara	Nominal	l/s ( )
Speed	rpm 2900	Flow	Max- l/s 7.5
Number of stages	1	Min-	l/s 2.5
Max. casing pressure	kPa	Nominal	m
Max. working pressure	kPa 301.8	Head	at Qmax m 15.6
Head H(Q=0)	m 31	at Qmin	m 29.7
Weight	kg	Shaft power	kW ( )
Max.	mm 154	Max. shaft power	kW 2.2
Impeller R	designed mm 154	Efficiency	%
Min.	mm 141	NPSH 3%	m
Suction nozzle	DN 50 PN 12 EN1092-2 (e-SH)	Discharge nozzle	DN 32 PN 12 EN1092-2 (e-SH)

### Pump Materials

Pump body	Stainless steel / AISI 316L
Impeller	Stainless steel / AISI 316L
SEAL HOUSING	Stainless steel / AISI 316L
Wear Ring	Stainless steel / AISI 316L
Counterwear ring	Stainless steel / AISI 316L
Shaft extension	Stainless steel / AISI 316L
Rigid shaft coupling	Stainless steel / AISI 316
Impeller locknut and washer	Stainless steel / AISI 316
Tab	Stainless steel / AISI 316L

### Shaft Seal

Single Seal	
e-SH - uniten	Roten
Rotating Assembly	V-Ceramic
Fixed Assembly	B-Resin impregnated carbon
Elastomers	V-FKM (FPM)
Springs	G-AISI 316
Other Components	G-AISI 316

### Motor data

Manufacturer	Lowara	Electric voltage	230 V
Specific design	Single phase surface motor		
Type	PLM90.../122		
Rated power	2.2 kW	Electric current	11.6 A
Speed	2825 rpm	Degree of protection	IP 55
Frame size	90	Weight	0 kg
Shaft diameter	0 mm	Colour	RAL 5010
Insulation class	F		

### Coupling

Manufacturer	
Series	
Type	
Frame size	
Spacer length	
Weight	
Coupling protection	

### Base plate

Description	
Weight	

### Remarks:


Customer	Date	12/7/2020
Contact	Project	
Phone number	Project no.	
Email		

**ESHE 32-160/22/P25HSSA**  
101860800

**Hydraulic data**

Operating Data Specification		Hydraulic data (duty point)		Impeller design	
Flow	0 l/s	Flow		Impeller R	154 mm
Head	0 m	Head		Frequency	50 Hz
Static head	0 m	MEI >=0,4		Speed	2900 rpm

Power datas referred to:  
Water, pure [100%] ; 4°C; 1000kg/m<sup>3</sup>; 1.57mm<sup>2</sup>/s  
Performance according to ISO 9906:2012 – Grade 3B

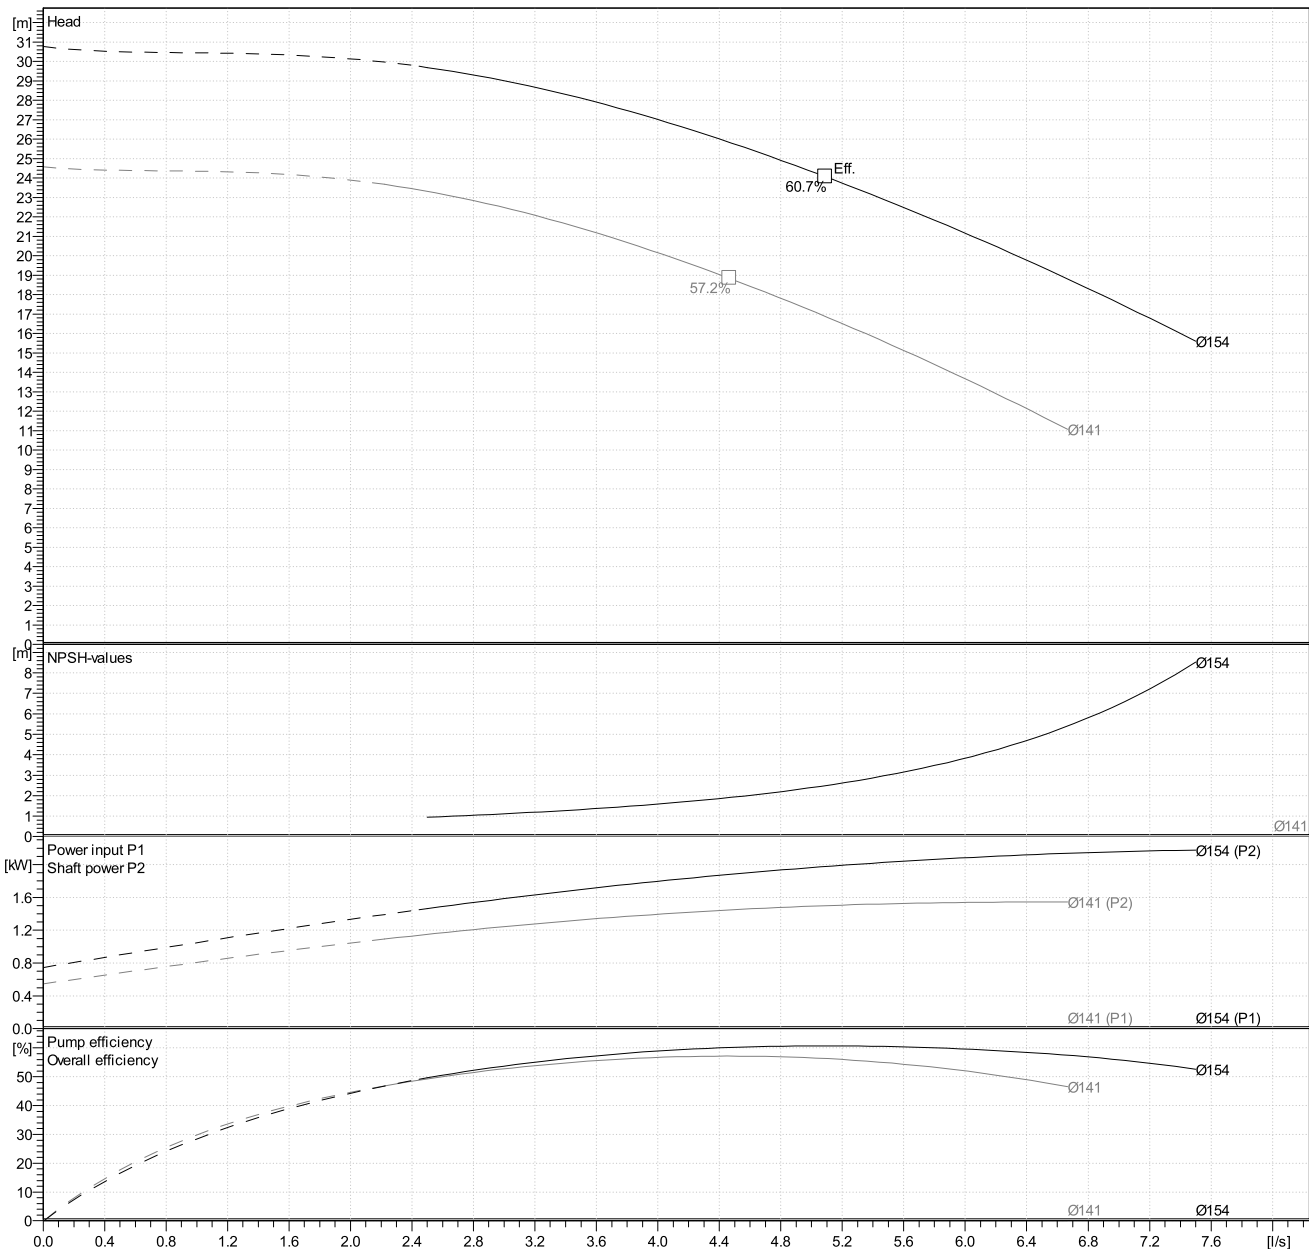

Customer	Date	12/7/2020
Contact	Project	
Phone number	Project no.	
Email		

**ESHE 32-160/22/P25HSSA**  
101860800

**Dimensions** mm/l

a	80		
B	253		
DNA	50		
DNM	32		
h1	132		
h2	160		
Hmax	292		
k	98		
L	478		
n	210		
n1	130		
x	134		
		Total weight	29 kg

**Connections** mm

Suction nozzle	Discharge nozzle
DN 50	DN 32
PN 12	PN 12
EN1092-2 (e-SH)	EN1092-2 (e-SH)

D	165	D	140
Dia. Holes	18	Dia. Holes	18
DN	50	DN	32
G	83	G	64
M	125	M	100
Max thickness	18	Max thickness	16
N° Holes	4	N° Holes	4

**Drawing**

