

| | | |
|--------------|-------------|-----------|
| Customer | Date | 12/9/2020 |
| Contact | Project | |
| Phone number | Project no. | |
| Email | | |

ESHE 40-250/92/P25VSSA

101860360

Operating data

| | | | |
|---------------------------|------------------|---------------------------|--------------------------|
| Pump type | Single head pump | Fluid | Water, pure |
| No. of pumps / Reserve | 1 / 0 | Operating temperature t A | °C 4 |
| Nominal flow | l/s 0 | pH-value at t A | 7 |
| Nominal head | m 0 | Density at t A | kg/m ³ 1000 |
| Static head | m 0 | Kin. viscosity at t A | mm ² /s 1.569 |
| Inlet pressure | kPa 0 | Vapor pressure at t A | kPa 100 |
| Environmental temperature | °C 20 | Solids | 0 |
| Available system NPSH | m 0 | Altitude | m 0 |

Pump data

| | | | |
|-----------------------|-----------------------------|------------------|-----------------------------|
| Make | Lowara | Nominal | l/s () |
| Speed | rpm 2900 | Flow Max- | l/s 11.7 |
| Number of stages | 1 | Min- | l/s 5 |
| Max. casing pressure | kPa | Nominal | m |
| Max. working pressure | kPa 636.3 | Head at Qmax | m 44.6 |
| Head H(Q=0) | m 65 | at Qmin | m 62 |
| Weight | kg | Shaft power | kW () |
| Max. | mm 251 | Max. shaft power | kW 8.9 |
| Impeller R designed | mm 218 | Efficiency | % |
| Min. | mm 218 | NPSH 3% | m |
| Suction nozzle | DN 65 PN 12 EN1092-2 (e-SH) | Discharge nozzle | DN 40 PN 12 EN1092-2 (e-SH) |

Pump Materials

| | |
|-----------------------------|-----------------------------|
| Pump body | Stainless steel / AISI 316L |
| Impeller | Stainless steel / AISI 316L |
| SEAL HOUSING | Stainless steel / AISI 316L |
| Wear Ring | Stainless steel / AISI 316L |
| Counterwear ring | Stainless steel / AISI 316L |
| Shaft extension | Stainless steel / AISI 316L |
| Rigid shaft coupling | Stainless steel / AISI 316 |
| Impeller locknut and washer | Stainless steel / AISI 316 |
| Tab | Stainless steel / AISI 316L |

Shaft Seal

| | |
|-------------------|----------------------------|
| Single Seal | |
| e-SH - uniten | Roten |
| Rotating Assembly | V-Ceramic |
| Fixed Assembly | B-Resin impregnated carbon |
| Elastomers | V-FKM (FPM) |
| Springs | G-AISI 316 |
| Other Components | G-AISI 316 |

Motor data

| | | | |
|------------------|-------------------------------|----------------------|----------|
| Manufacturer | Lowara | Electric voltage | 400 V |
| Specific design | IE3 Three phase surface motor | | |
| Type | PLM132.../392 E3 | | |
| Rated power | 9.2 kW | Electric current | 17.2 A |
| Speed | 2930 rpm | Degree of protection | IP 55 |
| Frame size | 132 | Weight | 59 kg |
| Shaft diameter | 0 mm | Colour | RAL 5010 |
| Insulation class | F | | |

Coupling

| | |
|---------------------|--|
| Manufacturer | |
| Series | |
| Type | |
| Frame size | |
| Spacer length | |
| Weight | |
| Coupling protection | |

Base plate

| | |
|-------------|--|
| Description | |
| Weight | |

Remarks:

| | | |
|--------------|-------------|-----------|
| Customer | Date | 12/9/2020 |
| Contact | Project | |
| Phone number | Project no. | |
| Email | | |

ESHE 40-250/92/P25VSSA

101860360


Hydraulic data

| Operating Data Specification | | Hydraulic data (duty point) | | Impeller design | |
|------------------------------|-------|-----------------------------|--|-----------------|----------|
| Flow | 0 l/s | Flow | | Impeller R | 218 mm |
| Head | 0 m | Head | | Frequency | 50 Hz |
| Static head | 0 m | MEI >=0,4 | | Speed | 2900 rpm |

Power data referred to:

Water, pure [100%] ; 4°C; 1000kg/m³; 1.57mm²/s

Performance according to ISO 9906:2012 – Grade 3B

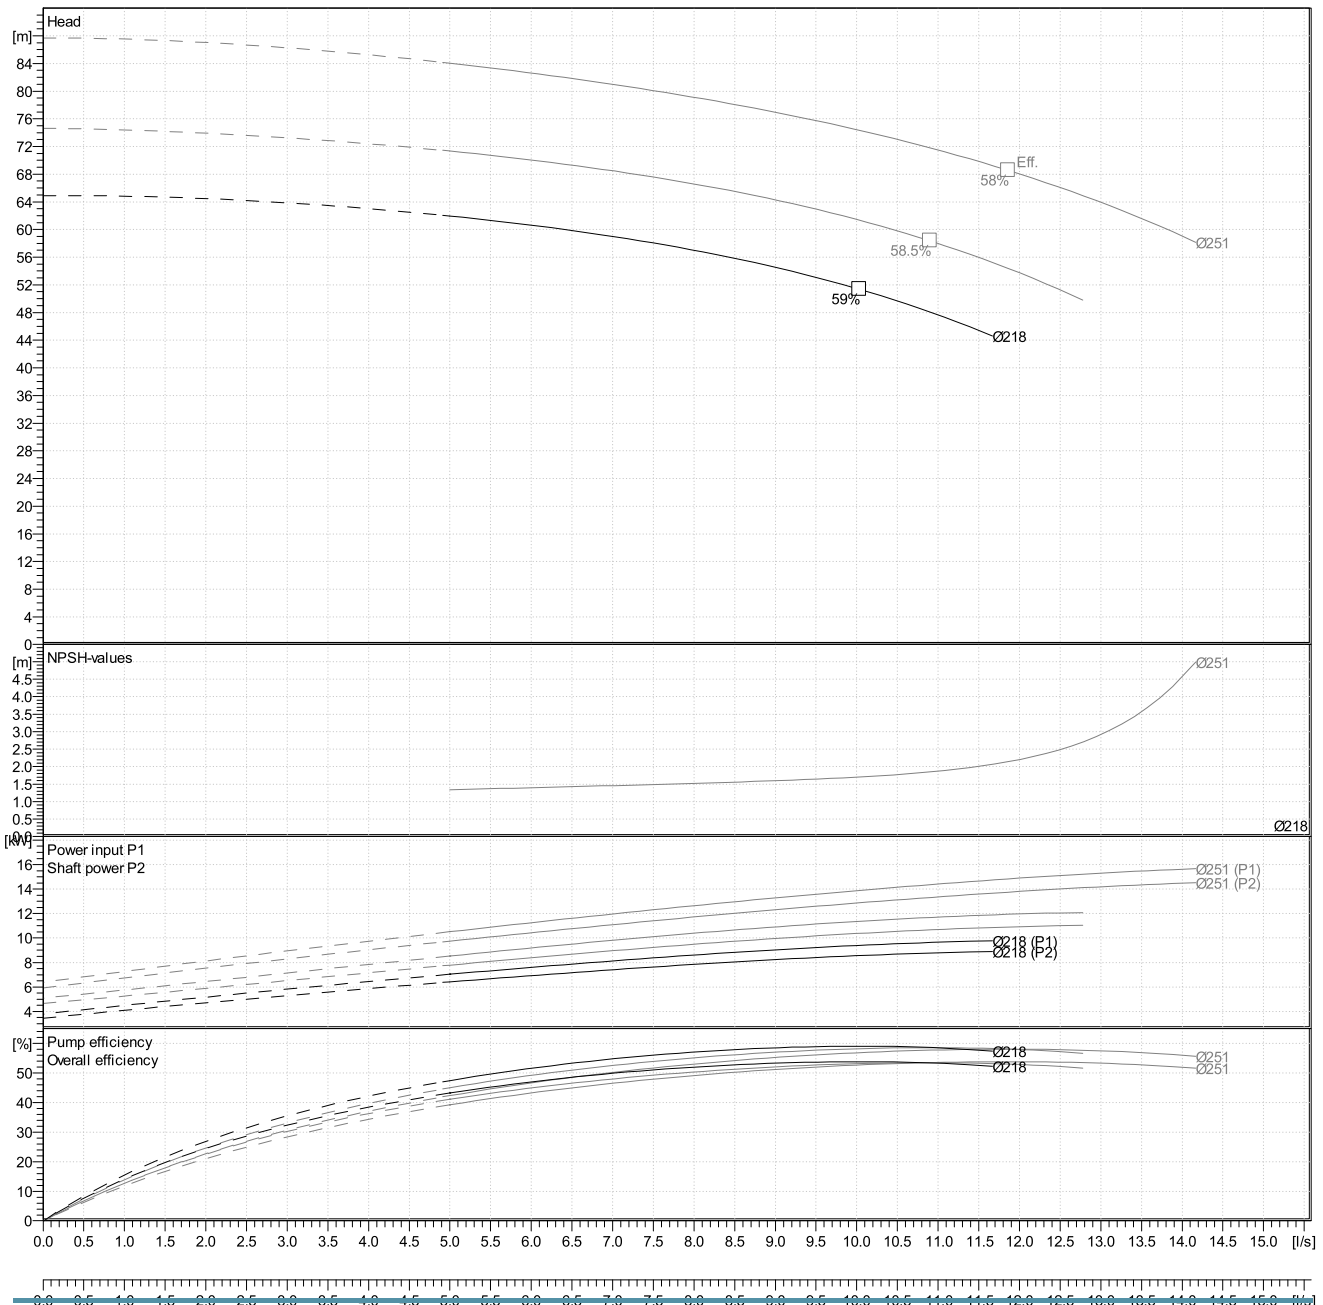

| | | |
|--------------|-------------|-----------|
| Customer | Date | 12/9/2020 |
| Contact | Project | |
| Phone number | Project no. | |
| Email | | |

ESHE 40-250/92/P25VSSA
101860360

Dimensions mm/l

| | | | |
|------|-----|--------------|-------|
| a | 100 | | |
| B | 345 | | |
| DNA | 65 | | |
| DNM | 40 | | |
| h1 | 180 | | |
| h2 | 225 | | |
| Hmax | 405 | | |
| k | 107 | | |
| L | 605 | | |
| n | 265 | | |
| n1 | 130 | | |
| w1 | 343 | | |
| x | 191 | | |
| | | Total weight | 89 kg |

Connections mm

| | |
|-----------------|------------------|
| Suction nozzle | Discharge nozzle |
| DN 65 | DN 40 |
| PN 12 | PN 12 |
| EN1092-2 (e-SH) | EN1092-2 (e-SH) |

| | | | |
|---------------|-----|---------------|-----|
| D | 185 | D | 150 |
| Dia. Holes | 18 | Dia. Holes | 18 |
| DN | 65 | DN | 40 |
| G | 104 | G | 68 |
| M | 145 | M | 110 |
| Max thickness | 18 | Max thickness | 16 |
| N° Holes | 4 | N° Holes | 4 |

Drawing



046035-EN-E_2D