


CEAM 210/5

Company	Anglian Pumping Services	Customer	Date	11/26/2020
Contact	Joshua Harvey	Contact	List price	Price on req.
Project		Phone number	Family code	
Project no.		Email	Item no.	101800080

Performance according to ISO 9906:2012 – Grade 3B

Power datas referred to:

Water, pure [100%] ; 4°C; 1000kg/m³; 1.57mm²/s

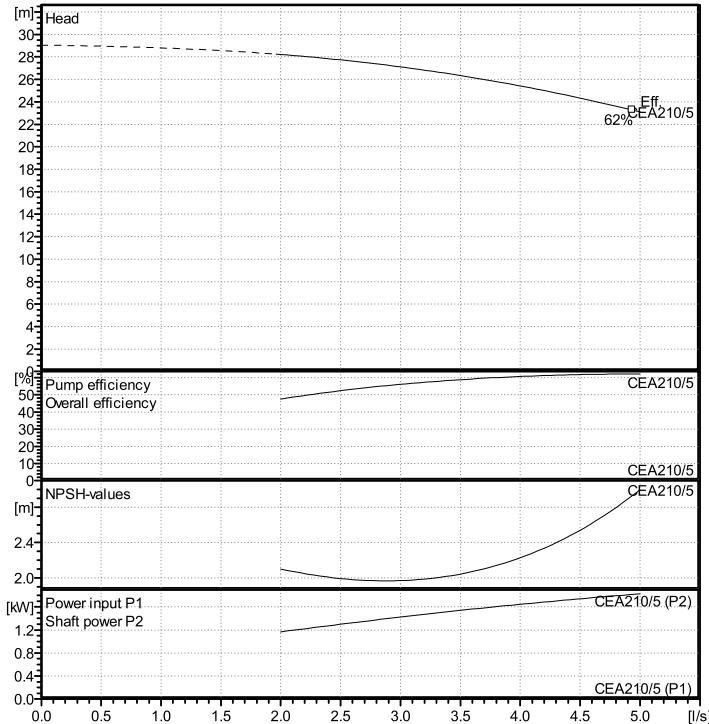

Operating Data Specification

Flow	0 l/s
Head	0 m

Hydraulic data (duty point)

Flow	
Head	
Power input	
MEI >= 0,4	

Pump data

Make	Lowara
Type	CEAM 210/5
	Single-impeller centrifugal electric pump
Speed	2900
Head H(Q=0)	29 m
Suction side	
Discharge side	
Types of installation	Monobloc
Weight	17 kg

Materials / seals

Pump body	Stainless steel / AISI 304
Impeller	Stainless steel / AISI 304
Diffuser	Stainless steel / AISI 304
SEAL HOUSING	Stainless steel / AISI 304

Shaft Seal

Rotating Assembly	Ceramic Alumina
Fixed Assembly	Carbon
Elastomers	NBR
Springs	AISI 316
Other Components	AISI 304

Motor data

Rated power P2	2.2 kW	Nom. Speed	2825 rpm
Frequency	50	Phase	1~
Rated v oltage	230 V	Rated current	11.6 A
Protection class	IP 55	Insulation class	F
Permitted v oltage tolerance +/-	10%		

Dimensions mm

A	54	H2	262
D	174	L	429
DNA	Rp 1½	L1	84
DNM	Rp 1¼	W	76
H	224		
H1	113		

Note:

