


CO 500/15

Company	Customer	Date	11/26/2020
Contact	Contact	List price	Price on req.
Project	Phone number	Family code	
Project no.	Email	Item no.	104491060

Performance according to ISO 9906:2012 – Grade 3B

Power data referred to:

Water, pure [100%] ; 4°C; 1000kg/m³; 1.57mm²/s

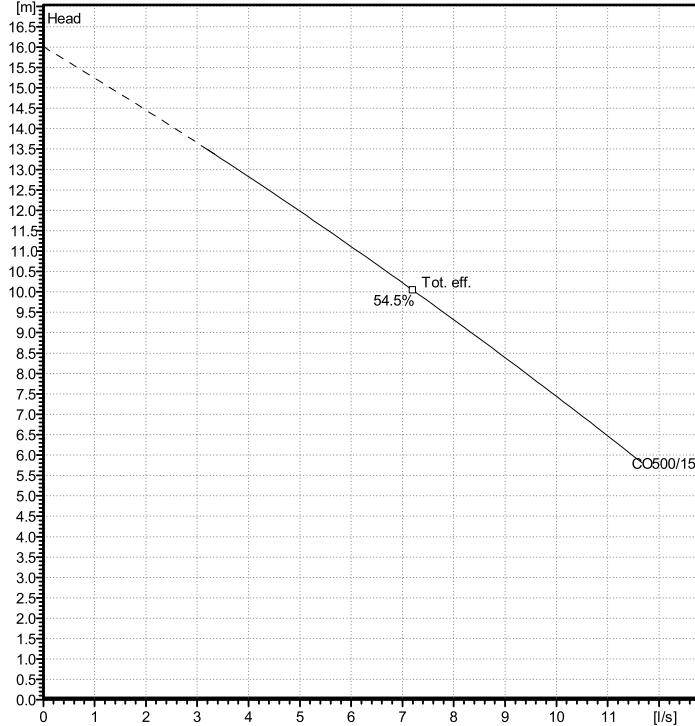

Operating Data Specification

Flow	0 l/s
Head	0 m

Hydraulic data (duty point)

Flow	
Head	
Power input	
MEI $\geq 0,4$	

Pump data

Make	Lowara
Type	CO 500/15
Open impeller centrifugal pump with threaded connections	
Speed	2900
Head H(Q=0)	16 m
Suction side	
Discharge side	
Types of installation	Monobloc
Weight	17.8 kg

Materials / seals

Pump body	Stainless steel
Impeller	Stainless steel
SEAL HOUSING	Stainless steel
Shaft extension	Stainless steel

Shaft Seal

Rotating Assembly	V-Ceramic
Fixed Assembly	B-Resin impregnated carbon
Elastomers	V-FKM (FPM)
Springs	G-AISI 316
Other Components	G-AISI 316

Motor data

Rated power P2	1.5 kW	Nom. Speed	2885 rpm
Frequency	50	Phase	3~
Rated voltage	400 V	Rated current	3.17 A
Protection class	IP 55	Insulation class	F
Permitted voltage tolerance +/- 10%			

Dimensions mm

D	155		
DNA	Rp2		
DNM	Rp 1½		
H2	240		
L	385		
L1	114		

Note:

