

NEW



DIVER 6

6" MULTI-STAGE POWERFUL SUBMERSIBLE PUMPS




Multi-stage powerful submersible pumps ideal for rain water systems, operating sprinklers, pumping water from tanks, cisterns, ponds and wells and other applications that require high pressure. Available with 2, 3 and 4 impellers. Suitable to pump clear water.

Anti-corrosive and rust-proof materials
Motor with thermic overload protection


Wear resistant shaft.
Anti-debris stainless steel strainer.
Excellent cooling of the motor that enables the pump to operate even when it is partially submerged.
Automatic version with start/ stop float switch.
Supplied with power cable with plug, non return valve and 4-step fitting.

ELECTRICAL AND HYDRAULIC DATA

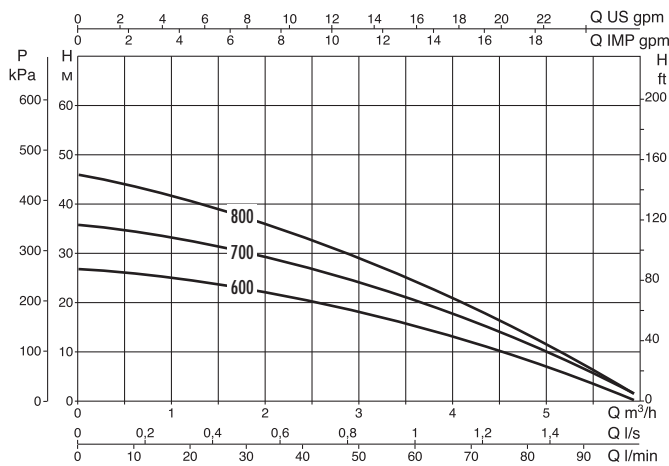

MODEL	VOLTAGE 50 Hz	P2 NOMINAL		Ø	CABLE LENGTH m.	Q m³/h	H m
		kW	HP				
DIVER 6 600 M-A	1 x 230 V	0,55	0,75	1"	15	0,6-4,8	22-6
DIVER 6 700 M-A	1 x 230 V	0,65	0,88	1"	15	0,6-4,8	35-10
DIVER 6 800 M-A	1 x 230 V	0,75	1	1"	15	0,6-4,8	45-13

DIMENSIONS AND WEIGHT

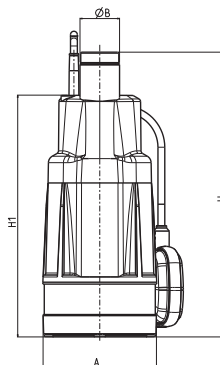

MODEL	A	ØB	H	H1	PACKAGING DIMENSION m³	GROSS WEIGHT Kg
DIVER 6 600 M-A	150	52	350	293	0,008	7,5
DIVER 6 700 M-A	150	52	375	318	0,008	8,7
DIVER 6 800 M-A	150	52	400	343	0,009	9

NEW



AB DIVER 6

MULTI-STAGE POWERFUL SUBMERSIBLE PUMPS

SPECIAL DEVELOPED FOR USE IN AdBlue®




Multi-stage powerful submersible pumps ideal for rain water systems, operating sprinklers, pumping water from tanks, cisterns, ponds and wells and other applications that require high pressure. Available with 2, 3 and 4 impellers. Suitable to pump clear water.

- Anti-corrosive and rust-proof materials.
- Motor with thermic overload protection.
- Wear resistant shaft.
- Anti-debris stainless steel strainer.
- Excellent cooling of the motor that enables the pump to operate even when it is partially submerged.
- Automatic version with start/ stop float switch.
- Supplied with power cable with plug, non return valve and 4-step fitting.

The models AB Diver 6 -A are multi-stage powerful submersible pumps available with 2, 3 and 4 impellers specifically developed for use in AdBlue®.


ELECTRICAL AND HYDRAULIC DATA

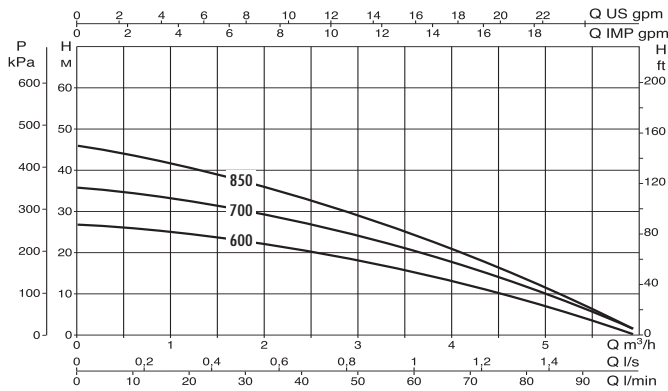

MODEL	VOLTAGE 50 Hz	P2 NOMINAL		Ø	CABLE LENGHT m.	Q m³/h	H m
		kW	HP				
AB DIVER 6 600 M-A	1 x 230 V	0,55	0,75	1"	15	0,6-4,8	22-6
AB DIVER 6 700 M-A	1 x 230 V	0,65	0,88	1"	15	0,6-4,8	35-10
AB DIVER 6 850 M-A	1 x 230 V	0,75	1	1"	15	0,6-4,8	45-13

AdBlue® is a registered trademark of Verband der Automobilindustrie e.V. (VDA).

DIMENSIONS AND WEIGHT

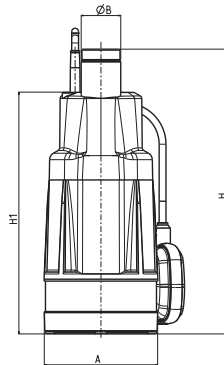

MODEL	A	ØB	H	H1	PACKAGING DIMENSION m³	GROSS WEIGHT Kg
AB DIVER 6 600 M-A	150	52	350	293	0,008	7,5
AB DIVER 6 700 M-A	150	52	375	318	0,008	8,7
AB DIVER 6 850 M-A	150	52	400	343	0,009	9