



## ■ MODEL SS-SERIES

**316 stainless steel construction.**

**Double mechanical seals.**

**Class F motor insulation.**

**Shaft sleeve saves on shaft wear due to abrasives and corrosion.**

**Additional lip seal protection keeps impurities and abrasives away from the mechanical seals.**

**Thermal overload protection guards against high amperage and high temperature.**

**Available with slide rail system to save maintenance cost and time.**

**Enhanced cable entry sealing system.**



JS250SS

## ■ APPLICATIONS

**Suitable for drainage of:**

**Clean water**

**Slightly waste water**

**Corrosive water**




**Light chemicals**

**Salt water**



JST37SS

## ■ PERFORMANCE CURVE

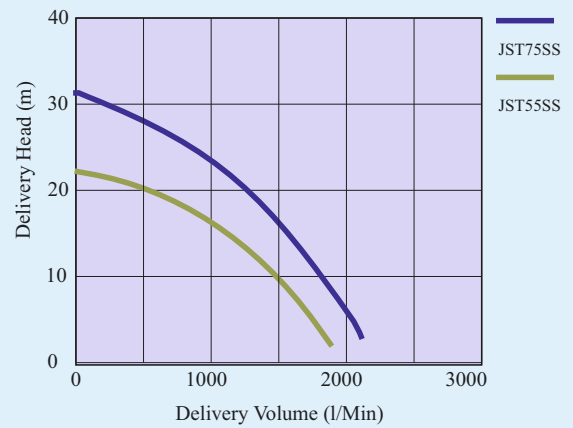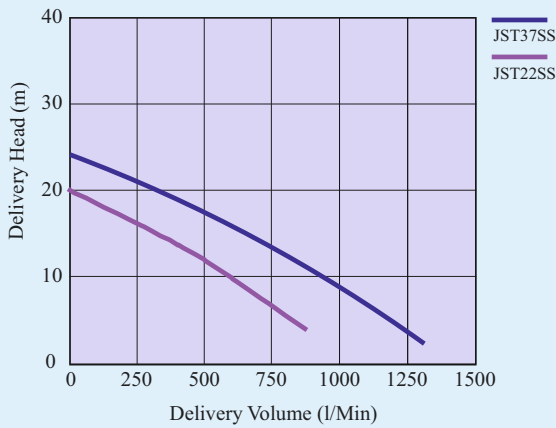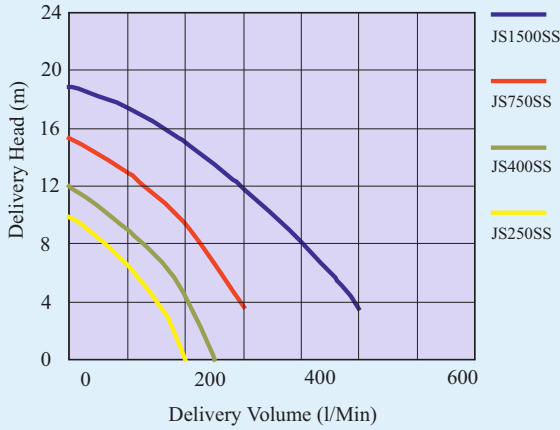

## ■ SPECIFICATIONS

Pump Type	Outlet Diameter Inch (mm)	Output KW	Voltage 50Hz	Max.		Weight KG
				Head M	Capacity l/min	
JS-250SS	1,5" (40)	0,25	1 Phase 230v	10	200	12,5
JS-400SS	2" (50)	0,40		12	240	15
JS-750SS	2" (50)	0,75		15	400	27
JS-1500SS	3" (75)	1,50		19	720	32
JST-08SS	2" (50)	0,75	3 Phase 400v	15	380	24
JST-15SS	3" (75)	1,50		18	500	28
JST-22SS	3" (75)	2,20		20	850	39
JST-37SS	4" (100)	3,70		24	1300	44
JST-55SS	4" (100)	5,50		22	1800	66
JST-75SS	6" (150)	7,50		31	2000	76