



water solutions

Data sheet

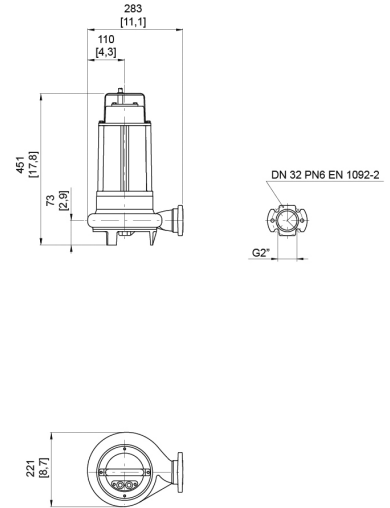
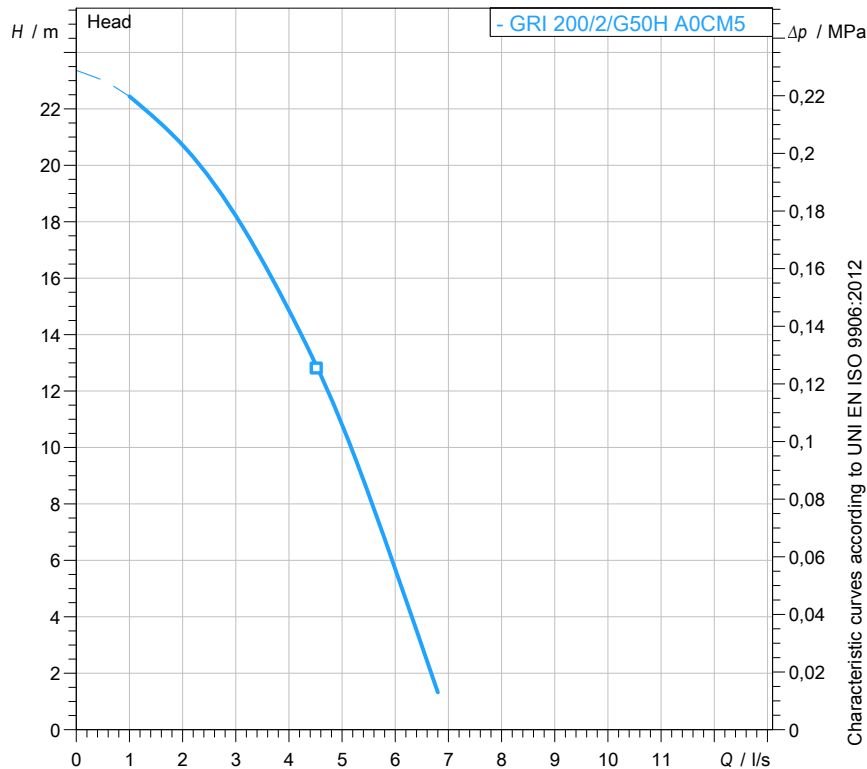
GRI 200/2/G50H A0CM5



series

Technical specification

1~ 50 Hz


 [mm]
 [inch]

Pump

Series	I series
Pump name	GRI 200/2/G50H A0CM5
Configuration	NGDCB51023N00NN
Standard	EN 809:2009

Motor data

Rated voltage	230 V
Frequency	50 Hz
Motor phases	1~
Number of poles	2
Rated power P2	1,70 kW
Incoming power P1	2,10 kW
Rated current	10,6 A
rpm	2600 1/min
Efficiency	71,7 %
cos ϕ	0,85
Rated torque	5,5 Nm
Start	
Degree of protection	IP 68
Insulation class	F

Hydraulic

Type	GR (Impeller with grinder system)
Free passage	0 mm
Impeller type	Multi channel impeller
Discharge	DN 32 - G 2" EN 1092-2
Curve tolerance	UNI EN ISO 9906:2012

Operating limits (standard pumps)

Max. ambient temperature	40 °C
Max. density treated liquid	1100 kg/m ³
Max. immersion depth	20 m
pH treated liquid	6 ÷ 14
Max. start per hour (equally distributed)	30
Wet/dry use	WET
Max. acoustic pressure level	70 dB
Operating mode	S1 - Continuous use

Construction materials

Case	Cast iron EN-GJL 250
Shaft	Stainless steel - AISI 420
Hydraulic	Cast iron EN-GJL 250
Impeller	Cast iron EN-GJL 250
Painting/Coating	Bi-epoxy 150 μ m
Screws	Stainless steel - Class A2-70
Gaskets	NBR
Cutter	Chromium steel - X102 CrMo17 KU
Cutting disk	Chromium steel - X102 CrMo17 KU

Construction features

Cooling system	No cooling jacket
Main cable	4G1
Control cable	-
Cable length	10 mt
Mechanical seals	2 in silicon carbide (2SiC)
Additional drilling	-
Weight*	32 kg
Electrical variant	Thermal protection, starting capacitor, box and running capacitor

* cable's weight not included

Rev. 0 - 16-12-2014

All data shown are not binding. Zenit reserves the right to change data and dimensions without notice.

Created on 2017-05-08

zenit.com

Page 1 / 3



water solutions

Data sheet

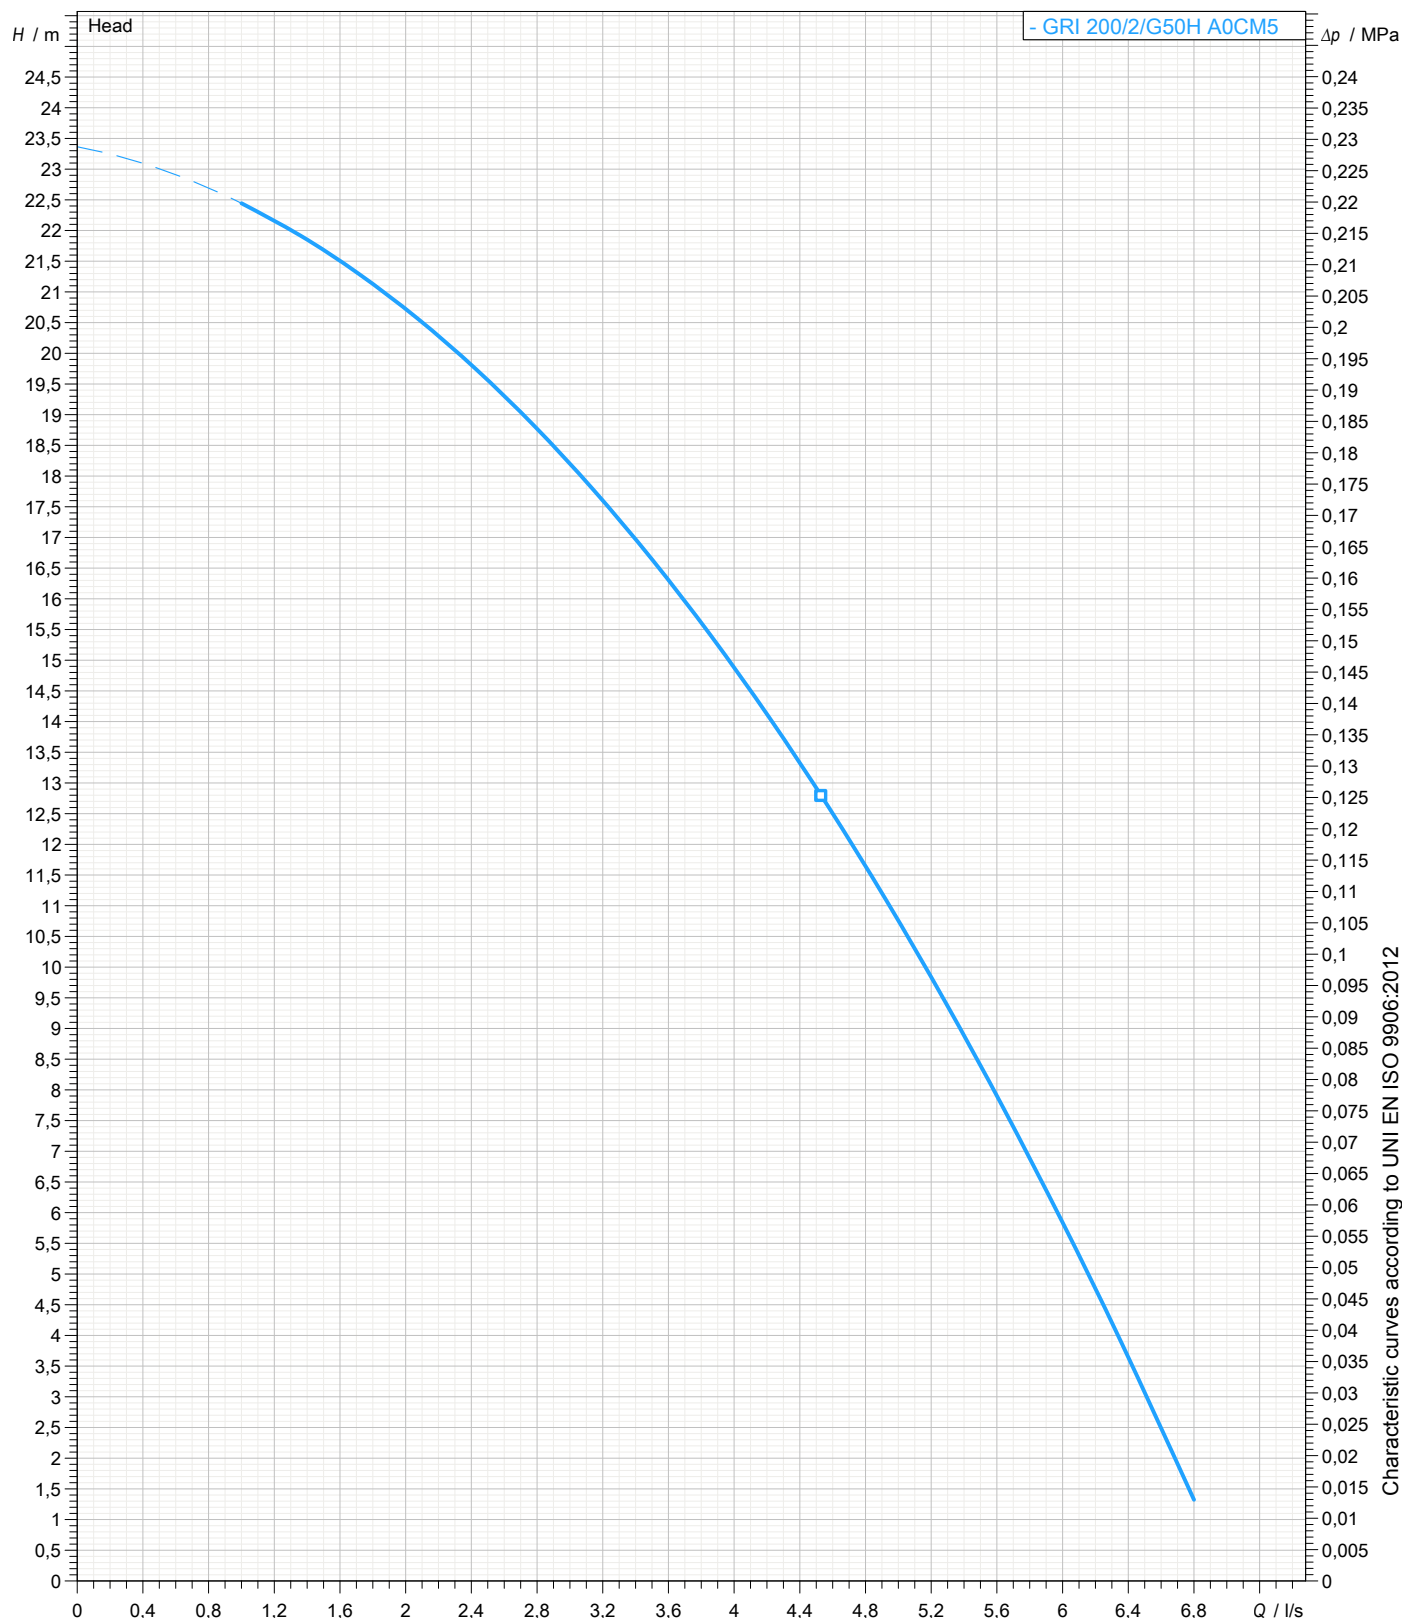
GRI 200/2/G50H A0CM5

series

Pump performance curves

1~ 50 Hz

Hydraulic type GR (Impeller with grinder system)	Impeller type Multi channel impeller	Free passage 0 mm	Discharge DN 32 - G 2"	Suction -
DUTY POINT				
Flow	Head	Shaft power P2	Hydraulic efficiency	Density 998,3 kg/m ³
				Viscosity 1,005 mm ² /s



Characteristic curves according to UNI EN ISO 9906:2012

