Booster set name

Technical Data

2GPE MATRIX 10-6T/2,2 ESPT (UK)

Customer	Date 07.10.2026	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project ID	E-mail

Requested data

1	Pump type	Booster Set	Fluid		Water
2	Number of pumps	2	Liquid temperature	°C	20
3	Flow m³/h		Kin. viscosity	cSt	1.005
4	Head m		Vapour pressure	kPa	2.34
5	Geodetic head m		PH value		
6	Inlet pressure kPa	0	Density	kg/m³	998.3
7	Available system NPSH	Ask our technical department.	Solids	Weight %	0
8	Ambient temperature °C	20	Installation height	m	100

Booster Set

9	Booster set name	2GPE MATRIX 10-6T/2,2 ESPT (UK)	Frequency		Hz	50
10	Design	Booster Set				
11	Manufacturer	EBARA	Impeller Dia.	Max.	mm	101
12	Speed rpm	2850		Designed	mm	101
13	No. of Stage	6		Min.	mm	101
14	Connection Suction side	UNI ISO 228 PN16	Flow	Operating	m³/h	
15	Connection Discharge side	UNI ISO 228 PN16		Max-	m³/h	15
16	Max Working Pressure kPa	1000		Min-	m³/h	3.6
17	Shut-off head kPa	706.52	Head	Operating	m	
18	Total weight kg	See the table of "Dimensions".		- (Qmax.)	m	17.2
19	Shaft power kW			- (Qmin.)	m	66.5
20			Max. Shaft Power at max. impeller		kW	2.28
21	Required NPSH m		Efficiency		%	

Materials

22	Frame	Galvanized steel	External pump casing	AISI 304
23	Manifold	AISI 304	Shaft	AISI 304
24	Check valve	Brass / NBR	Shaft seal	Ceramic/Carbon/EPDM
25	Ball valve	Brass / PTFE	O-ring	EPDM
26	Impeller	AISI 304		
27	Casing	AISI 304		

Motor

28	Manufacturer	EPE Standard	Insulation class		F
29	Type	TEFC_MATRIX 10-6T/2.2_400_Three Phase	Phases		3~
30	Specific design	IE3 / 50 Hz / Pole pairs 1	Frame size		
31	Rated power kW	2.2	Weight; motor	kg	
32	Number of poles	2	Electric voltage	V	400
33	Speed rpm	2850	Electric current	A	4.7
34	Degree of protection	IP 55			
35					

Remarks

Item intended for the UK market only.

EBARA

Performance curve

Booster set name

2GPE MATRIX 10-6T/2,2 ESPT (UK)

Customer	Date 07.10.2026	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project ID	E-mail

Requested data


1	Flow	m³/h	
2	Head	m	
3	Geodetic head	m	

Booster set

Operating flow	m³/h		Frequency	Hz	50
Operating head	m		Number of poles		2
Impeller Diameter Designed	mm	101	Speed	rpm	2850

Test standard: ISO 9906:2012 - Grade3B

Water; 20°C; 998.3kg/m³; 1cSt

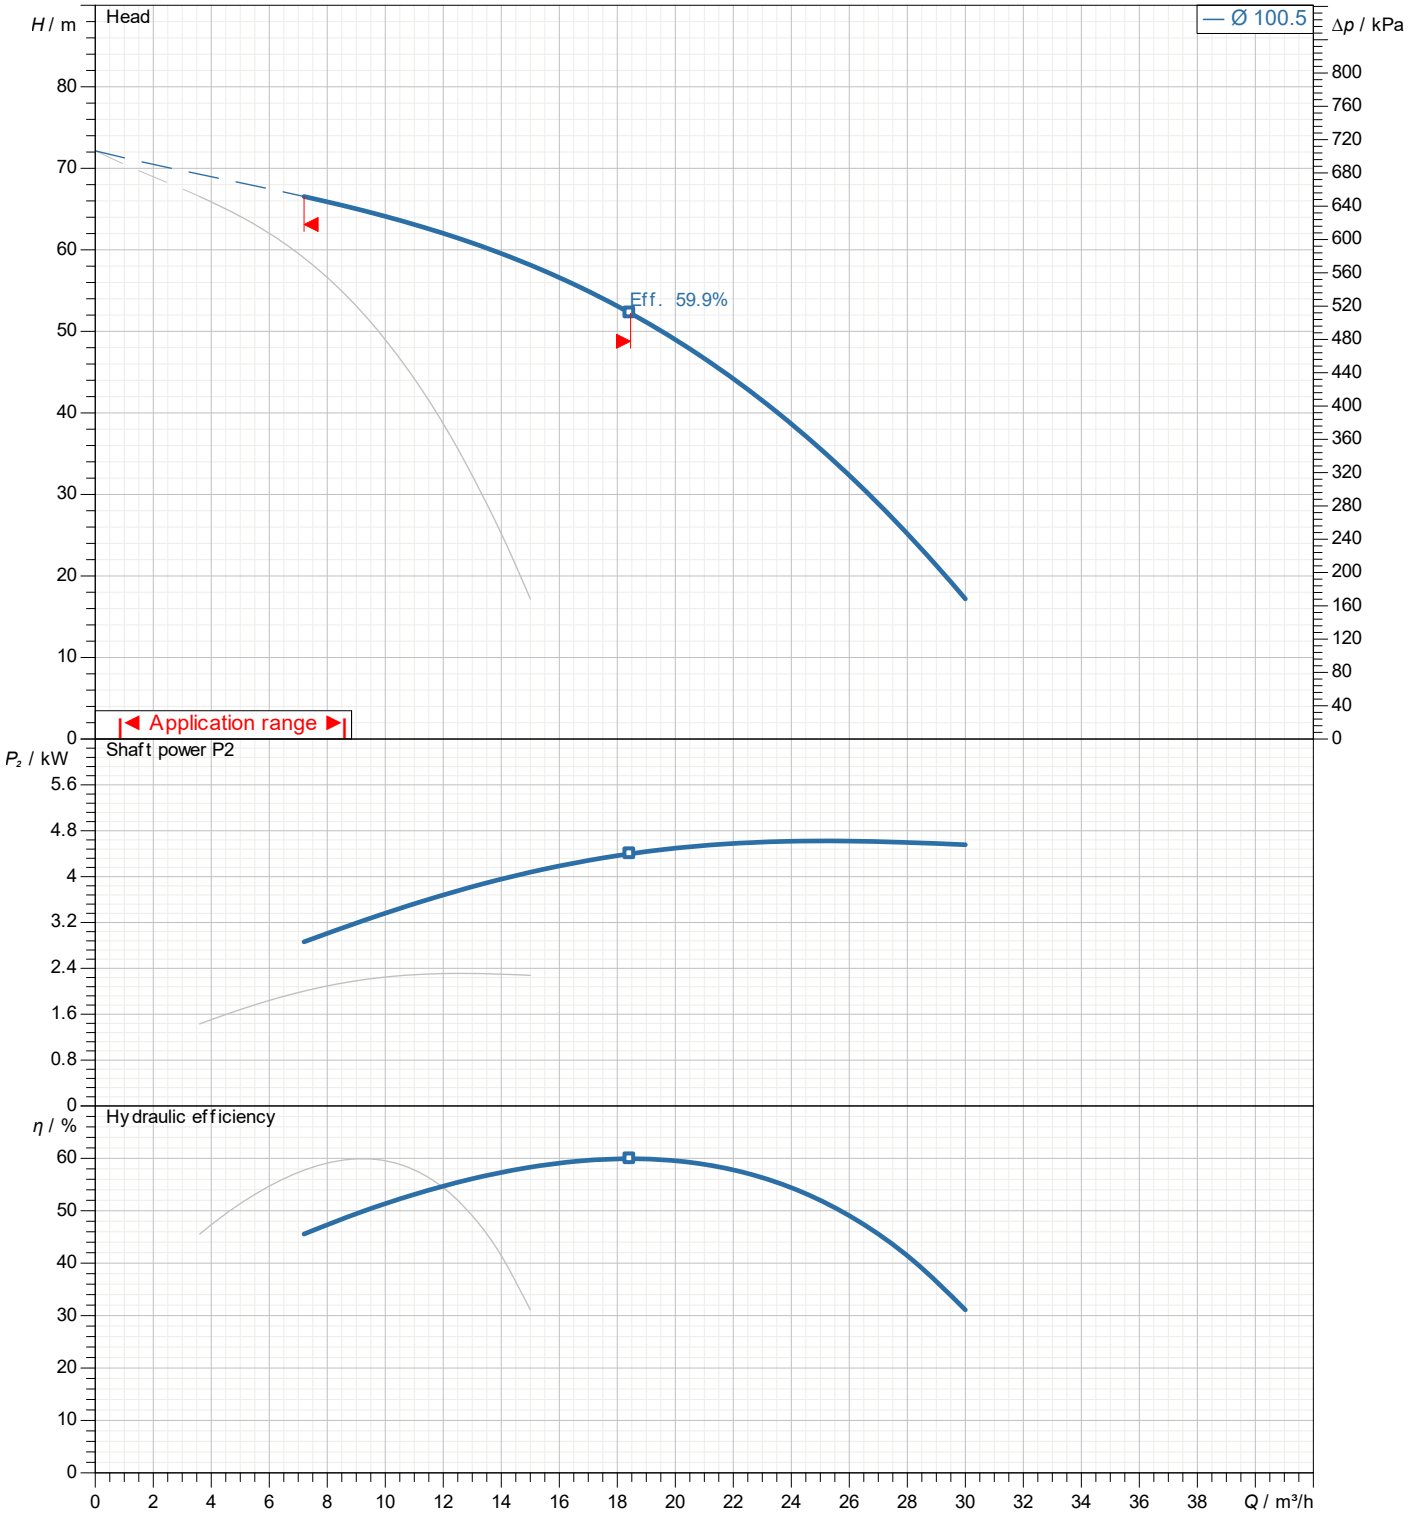


EBARA


Dimensions

Booster set name

2GPE MATRIX 10-6T/2,2 ESPT (UK)

Customer	Date 07.10.2026	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project ID	E-mail

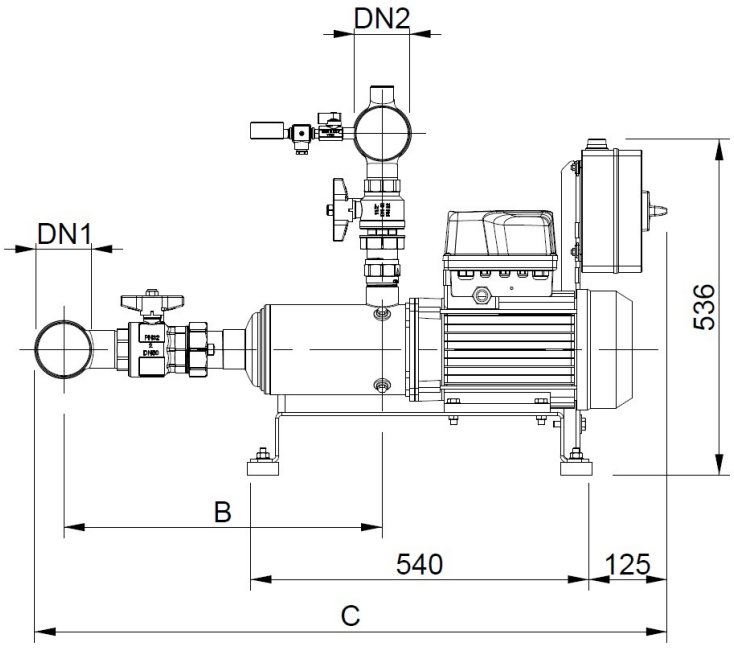

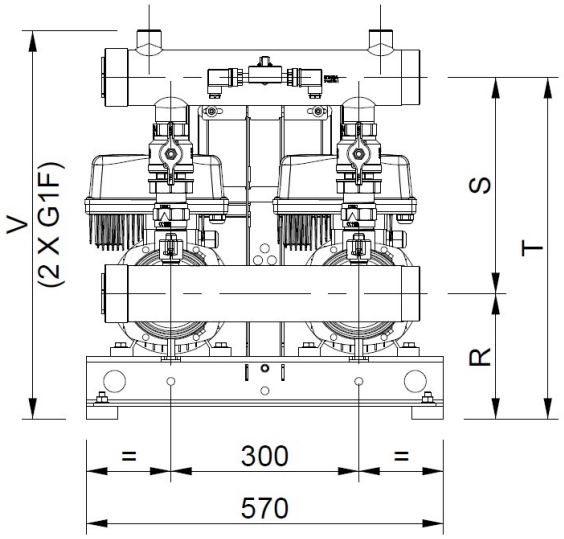

Dimensions in mm								
1	B	405						
2	C	860						
3	DN1	G2 1/2						
4	DN2	G2 1/2						
5	R	190						
6	S	310						
7	T	500						
8	V	570						
9	Weight kg	76						
10								
11								
12								
13								
14								
15								


EBARA

(1/2)
Construction

Booster set name

2GPE MATRIX 10-6T/2,2 ESPT (UK)

Customer	Date 07.10.2026	Company	
Contact	Item no.	Issued by	
Phone	Project	Phone	
E-mail	Project ID	E-mail	

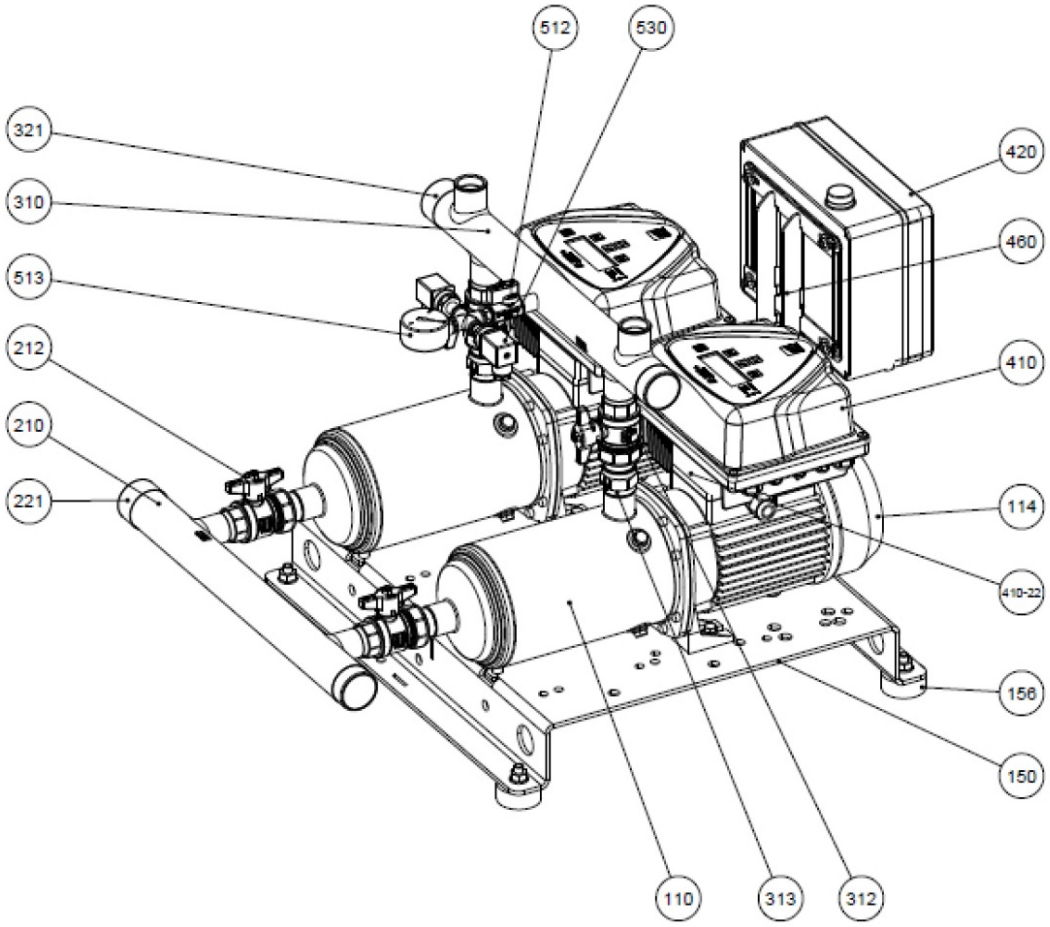

N°	PART NAME	MATERIAL	Quantity
110	Principal pump	-	2
114	Electric motor	-	2
150	Baseplate	Galvanized steel	1
156	Baseplate foot	SBR	4
210	Suction manifold	AISI 304	1
212	Union ball valve	Brass / P.T.F.E.	2
221	Threaded female cap	AISI 304	1
310	Discharge manifold	AISI 304	1
312	Union ball valve	Brass / P.T.F.E.	2
313	Check valve	Brass / NBR	2
321	Threaded female cap	AISI 304	1
410	E-SPD+	-	2
410-22	E-SPD+ adaptor	-	2
420	Protection panel	-	1
460	Protection panel frame	Galvanized steel	1
512	Ball valve	Brass / P.T.F.E.	1
513	Pressure gauge	Copper alloy / plastic	1
530	Pressure transmitter	-	2


(2/2)
Construction

Booster set name

2GPE MATRIX 10-6T/2,2 ESPT (UK)

Customer	Date 07.10.2026	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project ID	E-mail

MECHANICAL SEAL

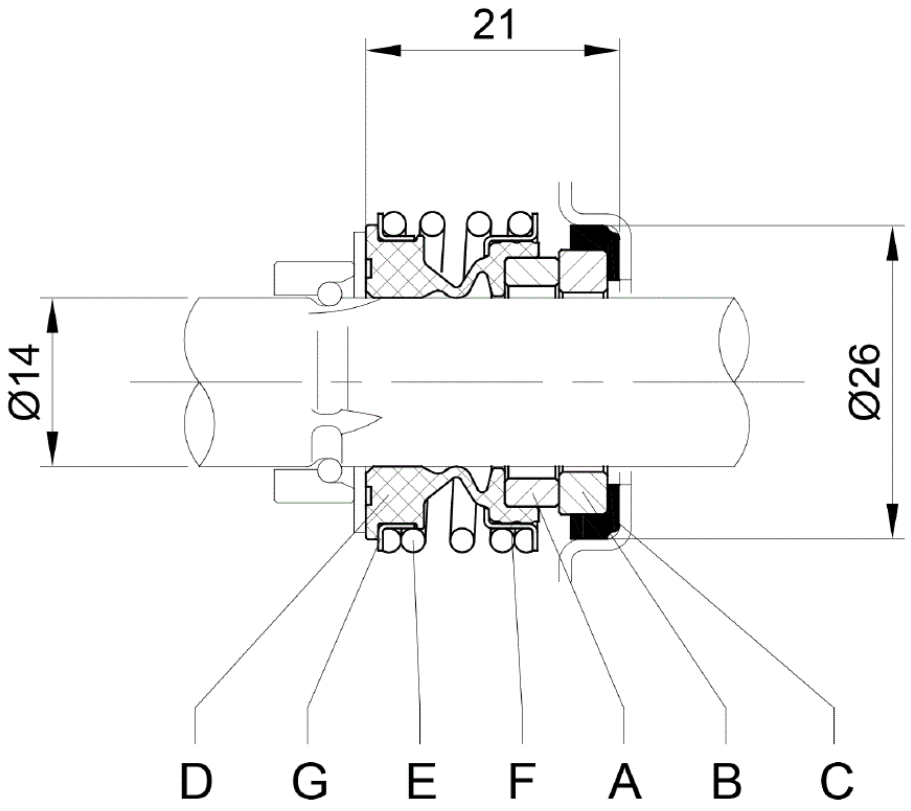

	Material						
	A Rotary seal ring	B Stationary seal ring	C Gasket	D Bellows	E Spring	F Frame	G Retainer ring
STANDARD*	Carbon	Ceramic	EPDM	EPDM	EN 1.4402 (AISI 316)	EN 1.4402 (AISI 316)	EN 1.4402 (AISI 316)

*Approval for drinking water application
WRAS Approval product

WRAS APPROVED PRODUCT

EBARA