

# WaterBoost



AWBH-300LH

300 Litre Horizontal Accumulator Vessel

Part No. AWBH-300LH



WhatsApp

07464 644 830

waterboost.co.uk

sales@waterboost.co.uk

**300 litre**

Storage capacity

**180 litre**

Working capacity

**10 bar**

Max working pressure

**90°C**

Max temperature

**1¼" BSP**

Connection size

**5 yr**

Warranty

## OVERVIEW

The WaterBoost AWBH-300LH is a 300 litre horizontal accumulator vessel designed to store pressurised water and deliver it on demand, significantly improving flow rates to taps, showers, baths and appliances. It uses a patented CAD-2 diaphragm technology for superior air and water separation, condensation-reducing design, and a non-corrosive water chamber — making it ideal for domestic and light commercial boosting systems.

## KEY FEATURES

- Patented CAD-2 diaphragm technology
- 100% butyl diaphragm — chlorine resistant
- Virgin polypropylene liner — true non-corrosive chamber
- Condensation-reducing design
- Stainless steel 1¼" BSP water connection
- O-ring sealed, leak-free air valve cap
- Two-part polyurethane, epoxy-primed paint finish
- WRAS, CE/PED, ACS, ISO-9001 approved
- No maintenance required
- 5 year warranty

## WHAT'S INCLUDED

- Vessel:** 300 litre horizontal accumulator vessel
- Fittings:** 1¼" BSP stainless steel connection elbow
- Air valve:** O-ring sealed, leak-free Schrader valve cap

## IDEAL FOR


- Properties with low mains flow — 1 to 3 bedroom homes
- Use alongside the WaterBoost ACF1 booster pump for best performance
- Whole-house flow improvement without boosting pressure
- Reducing pump cycling and extending pump life
- Combination boilers, unvented cylinders, showers and taps

## TECHNICAL SPECIFICATIONS

Model	<b>AWBH-300LH</b>
Nominal volume	<b>300 litres</b>
Style	<b>Horizontal</b>
Diaphragm	<b>CAD-2 patented butyl</b>
Liner	<b>Virgin polypropylene</b>
Shell	<b>Carbon steel</b>
Paint finish	<b>2-part polyurethane / epoxy</b>
Connection	<b>1¼" BSP stainless steel</b>
Max working pressure	<b>10 bar</b>
Max temperature	<b>90°C</b>
Length (A)	<b>1505 mm</b>
Diameter (B)	<b>558 mm</b>
Shipping weight	<b>34.25 kg</b>
Approval	<b>WRAS, CE/PED, ACS, ISO-9001</b>
Warranty	<b>5 years</b>



## HOW IT WORKS

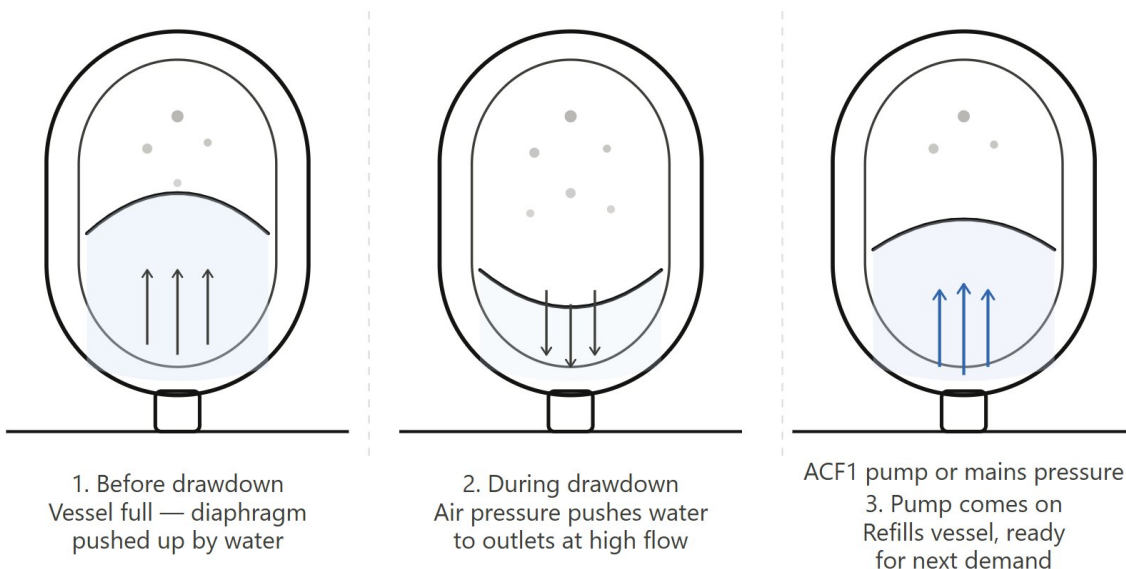

- 1 Mains water fills the accumulator vessel under resting (static) pressure
- 2 When a tap or outlet opens, pressurised water is released instantly from the vessel
- 3 The vessel delivers a full-flow burst before returning to mains supply
- 4 For best results, pair with the WaterBoost ACF1 pump to pre-charge above mains pressure

## SIZING GUIDE

1–2 bedroom home	60 L, 100 L or 200 L	2–3 bedroom home	200 L, 250 L or 300 L
3+ bedrooms	300 L or 450 L	Usable volume rule	Vessel size × 0.6 = usable litres
Example (AWBH-300LH)	300 × 0.6 = 180 L usable	Average shower flow	10–12 L/min

## PRE-CHARGE PRESSURE GUIDE


Mains pressure	Air charge (65%)
2.0 bar (30 psi)	1.3 bar
3.0 bar (44 psi)	1.95 bar
3.5 bar (51 psi)	2.275 bar
4.0 bar (58 psi)	2.6 bar
4.5 bar (65 psi)	2.925 bar
5.0 bar (72 psi)	3.25 bar

Set air charge = mains pressure × 0.65



## DIMENSIONS

### Horizontal Tank Dimensions

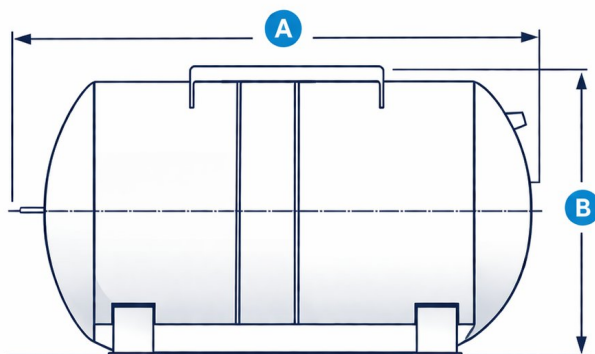

**A** Length (A)  
mm

**B** Diameter (B)  
mm

Size	A (Length)	B (Diameter)	Connection	Max Pressure
60 L	530 mm	424 mm	1" BSP	10 bar
80 L	726 mm	424 mm	1" BSP	10 bar
100 L	720 mm	475 mm	1" BSP	10 bar
150 L	950 mm	558 mm	1¼" BSP	10 bar
200 L	1026 mm	558 mm	1¼" BSP	10 bar
250 L	1206 mm	558 mm	1¼" BSP	10 bar
<b>300 L</b>	<b>1505 mm</b>	<b>558 mm</b>	<b>1¼" BSP</b>	<b>10 bar</b>

★ Highlighted row = AWBH-300LH (this product). All sizes available at waterboost.co.uk