

**Qty. Description**

1 SP 3A-12



Note! Product picture may differ from actual product

Product No.: [10001K12](#)

Submersible borehole pump, suitable for pumping clean water. Can be installed vertically or horizontally. All steel components are made in stainless steel, EN 1.4301 (AISI 304), that ensures high corrosive resistance. This pump carries drinking water approval.

The pump is fitted with a 0.75 kW MS402 motor with sand shield, lip seal, water-lubricated journal bearings and a volume compensating diaphragm. The motor is a canned type submersible motor offering good mechanical stability and high efficiency. Suitable for temperatures up to 40 °C.

The motor is not fitted with a temperature sensor. If temperature monitoring is desired, a Pt1000 sensor can be fitted.

The motor is for direct-on-line starting (DOL).


**Further product details**

The pump is suitable for applications similar to the following:

- raw-water supply
- irrigation
- groundwater lowering
- pressure boosting
- fountain applications.

**Pump**

All pump surfaces that are in contact with pumped liquids are made in stainless steel which makes them corrosion- and wear-resistant. The corrosion diagram below shows the capabilities of the pump and motor in relation to the temperature in Celsius (y-axis) and the concentration of chloride in ppm (x-axis).

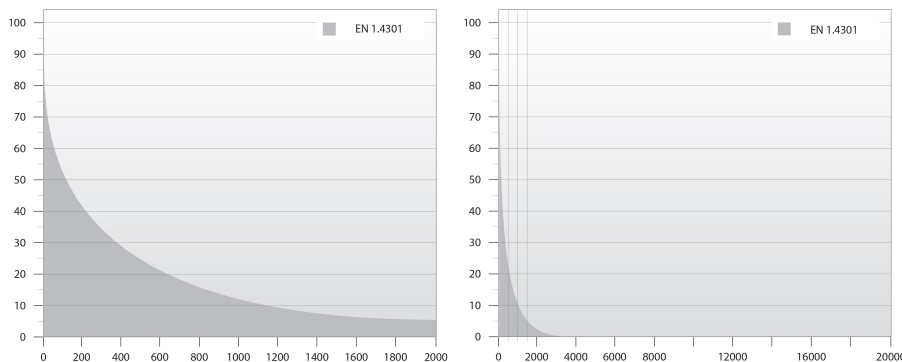

The elastomer parts in the pump are made of NBR (Nitrile-Butadiene Rubber) and TPU (Thermoplastic Poly-Urethane) which offers good wear resistance and long service intervals.

The suction interconnector is fitted with a strainer to prevent large particles from entering the pump. The suction interconnector is designed to comply with NEMA standards for motor mounting/dimensions.

| Qty. | Description  |
|------|--|
|      | <p><b>Motor</b></p> <p>The stator is hermetically encapsulated in stainless steel and the windings are embedded in polymer compound. This results in high mechanical stability, optimum cooling and reduces the risk of short circuits in the windings. The shaft seal is of the lip seal type characterised by low friction against the rotor shaft. The NBR elastomer offers good wear resistance, good elasticity and resistance to particles. The rubber material is approved for use in potable water.</p> <p>The motor can be fitted with a Pt100 or Pt1000 sensor that together with a control unit ensures that the maximum operating temperature conditions are not exceeded.</p> <p>Liquid:</p> <p>Pumped liquid: Water</p> <p>Maximum liquid temperature: 40 °C</p> <p>Max liquid t at 0.15 m/sec: 40 °C</p> <p>Selected liquid temperature: 20 °C</p> <p>Density: 998.2 kg/m<sup>3</sup></p> <p>Technical:</p> <p>Pump speed on which pump data are based: 2900 rpm</p> <p>Rated flow: 3 m<sup>3</sup>/h</p> <p>Rated head: 53 m</p> <p>Shaft seal for motor: LIPSEAL</p> <p>Approvals on nameplate: CE,EAC</p> <p>Curve tolerance: ISO9906:2012 3B</p> <p>Motor version: T40</p> <p>Specification for shaft end: SPLINE</p> <p>Materials:</p> <p>Pump: Stainless steel<br/>EN 1.4301<br/>AISI AISI 304</p> <p>Impeller: Stainless steel<br/>EN 1.4301<br/>AISI AISI 304</p> <p>Motor: Stainless steel<br/>DIN W.-Nr. 1.4301<br/>AISI 304</p> <p>Installation:</p> <p>Pump outlet: Rp1 1/4</p> <p>Motor diameter: 4 inch</p> <p>Electrical data:</p> <p>Motor type: MS402</p> <p>Rated power - P2: 0.75 kW</p> <p>Power (P2) required by pump: 0.75 kW</p> <p>Mains frequency: 50 Hz</p> <p>Rated voltage: 3 x 380-400-415 V</p> <p>Rated current: 2.15-2.30-2.40 A</p> <p>Starting current: 480-490-480 %</p> <p>Cos phi - power factor: 0.75-0.72-0.65</p> <p>Rated speed: 2850-2860-2870 rpm</p> <p>Start. method: direct-on-line</p> <p>Enclosure class (IEC 34-5): IP68</p> <p>Insulation class (IEC 85): B</p> <p>Built-in temp. transmitter: no</p> <p>Motor No: 79192004</p> <p>Others:</p> <p>Minimum efficiency index, MEI <math>\hat{\alpha}\%</math>: 0.70</p> |



Company name:

Created by:

Phone:



Date:

05/11/2020





| Qty. | Description |
|------|-------------|
|------|-------------|

|  |                                      |
|--|--------------------------------------|
|  | ErP status: EuP Standalone/Prod.     |
|  | Net weight: 12.4 kg                  |
|  | Gross weight: 13.8 kg                |
|  | Shipping volume: 16.3 m <sup>3</sup> |
|  | Danish VVS No.: 388313120            |
|  | Swedish RSK No.: 5852979             |
|  | Finnish LVI No.: 4762652             |
|  | Norwegian NRF no.: 9040853           |
|  | Country of origin: DK                |
|  | Custom tariff no.: 84137029          |

## 10001K12 SP 3A-12 50 Hz

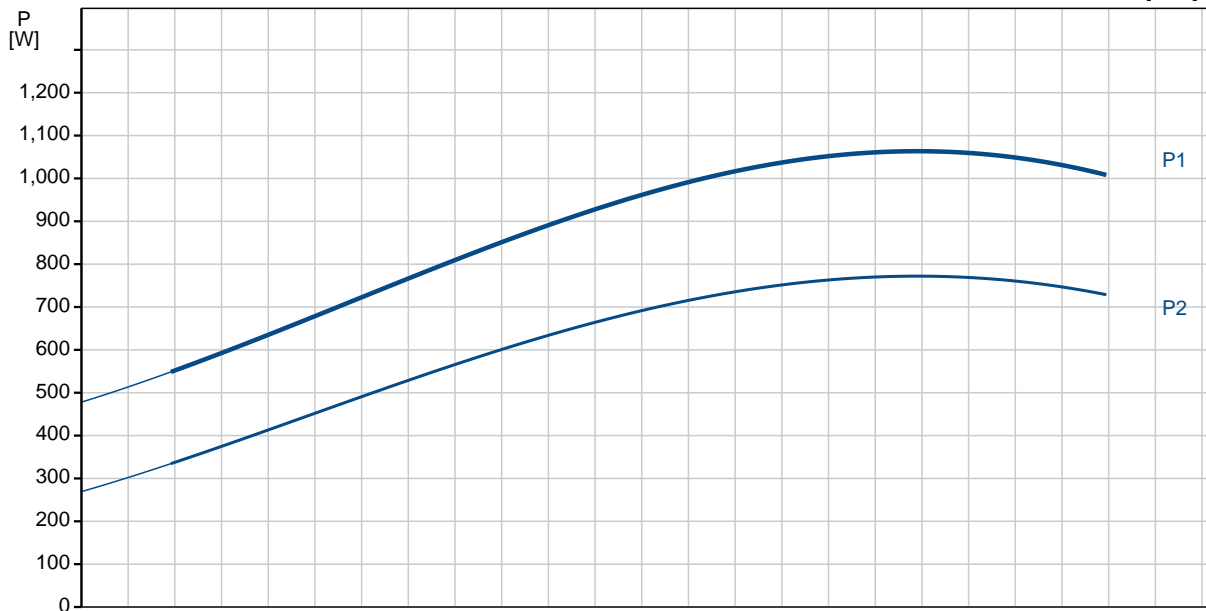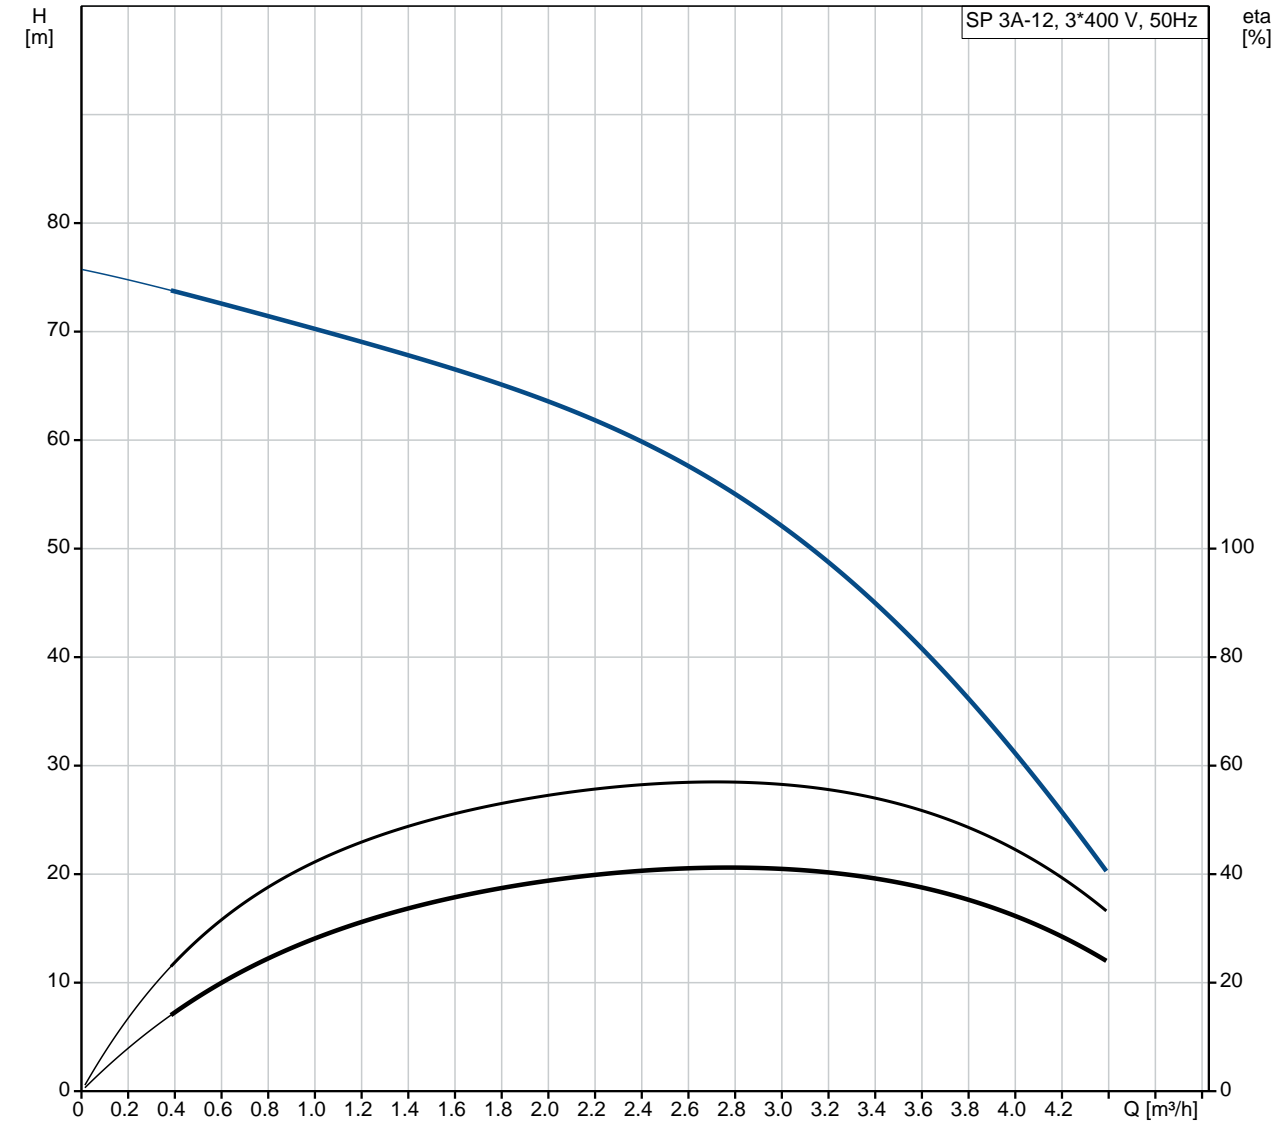

| Description                              | Value                   |
|--|-------------------------|
| <b>General information:</b>              |                         |
| Product name:                            | SP 3A-12                |
| Product No:                              | 10001K12                |
| EAN number:                              | 5708601051388           |
| Price:                                   | GBP 908                 |
| <b>Technical:</b>                        |                         |
| Pump speed on which pump data are based: | 2900 rpm                |
| Rated flow:                              | 3 m <sup>3</sup> /h     |
| Rated head:                              | 53 m                    |
| Stages:                                  | 12                      |
| Impeller reduc.:                         | NONE                    |
| Shaft seal for motor:                    | LIPSEAL                 |
| Approvals on nameplate:                  | CE,EAC                  |
| Curve tolerance:                         | ISO9906:2012 3B         |
| Model:                                   | A                       |
| Valve:                                   | YES                     |
| Motor version:                           | T40                     |
| Specification for shaft end:             | SPLINE                  |
| <b>Materials:</b>                        |                         |
| Pump:                                    | Stainless steel         |
| Pump:                                    | EN 1.4301               |
| Pump:                                    | AISI AISI 304           |
| Impeller:                                | Stainless steel         |
| Impeller:                                | EN 1.4301               |
| Impeller:                                | AISI AISI 304           |
| Motor:                                   | Stainless steel         |
| Motor:                                   | DIN W.-Nr. 1.4301       |
| Motor:                                   | AISI 304                |
| <b>Installation:</b>                     |                         |
| Pump outlet:                             | Rp1 1/4                 |
| Motor diameter:                          | 4 inch                  |
| <b>Liquid:</b>                           |                         |
| Pumped liquid:                           | Water                   |
| Maximum liquid temperature:              | 40 °C                   |
| Max liquid t at 0.15 m/sec:              | 40 °C                   |
| Selected liquid temperature:             | 20 °C                   |
| Density:                                 | 998.2 kg/m <sup>3</sup> |
| <b>Electrical data:</b>                  |                         |
| Motor type:                              | MS402                   |
| Applic. motor:                           | GRUNDFOS                |
| Rated power - P2:                        | 0.75 kW                 |
| Power (P2) required by pump:             | 0.75 kW                 |
| Mains frequency:                         | 50 Hz                   |
| Rated voltage:                           | 3 x 380-400-415 V       |
| Rated current:                           | 2.15-2.30-2.40 A        |
| Starting current:                        | 480-490-480 %           |
| Cos phi - power factor:                  | 0.75-0.72-0.65          |
| Rated speed:                             | 2850-2860-2870 rpm      |
| Start. method:                           | direct-on-line          |
| Enclosure class (IEC 34-5):              | IP68                    |
| Insulation class (IEC 85):               | B                       |
| Motor protec:                            | NONE                    |
| Thermal protec:                          | external                |
| Built-in temp. transmitter:              | no                      |
| Motor No:                                | 79192004                |
| <b>Others:</b>                           |                         |
| Minimum efficiency index, MEI %:         | 0.70                    |

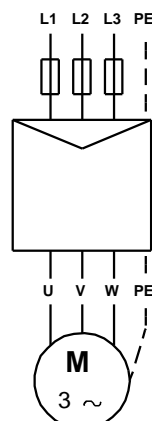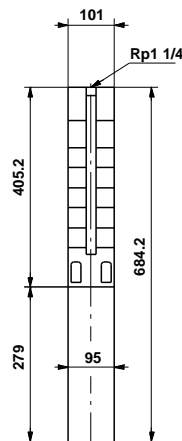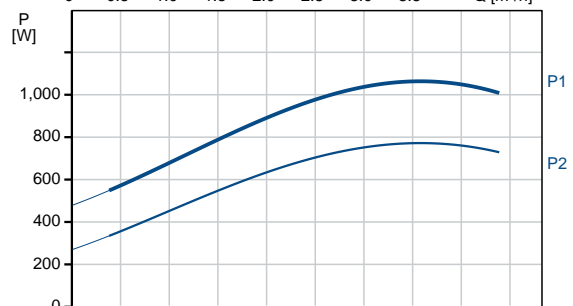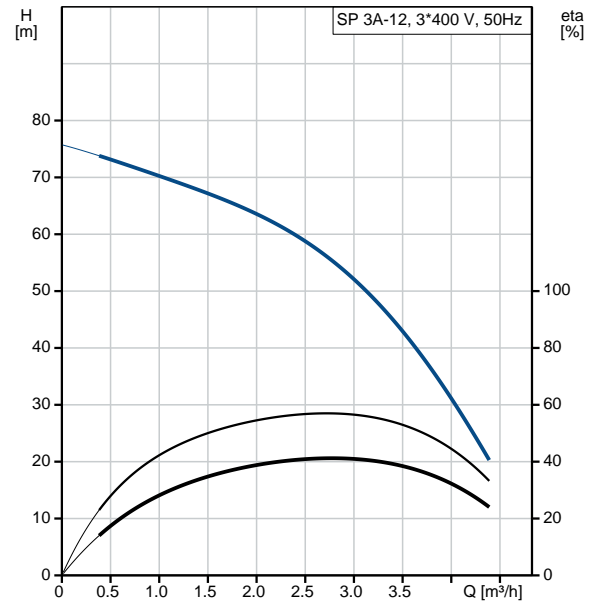



Company name:

Created by:


Phone:

Date:


05/11/2020

| Description        | Value                |
|--------------------|----------------------|
| ErP status:        | EuP Standalone/Prod. |
| Net weight:        | 12.4 kg              |
| Gross weight:      | 13.8 kg              |
| Shipping volume:   | 16.3 m <sup>3</sup>  |
| Danish VVS No.:    | 388313120            |
| Swedish RSK No.:   | 5852979              |
| Finnish LVI No.:   | 4762652              |
| Norwegian NRF no.: | 9040853              |
| Country of origin: | DK                   |
| Custom tariff no.: | 84137029             |

## 10001K12 SP 3A-12 50 Hz

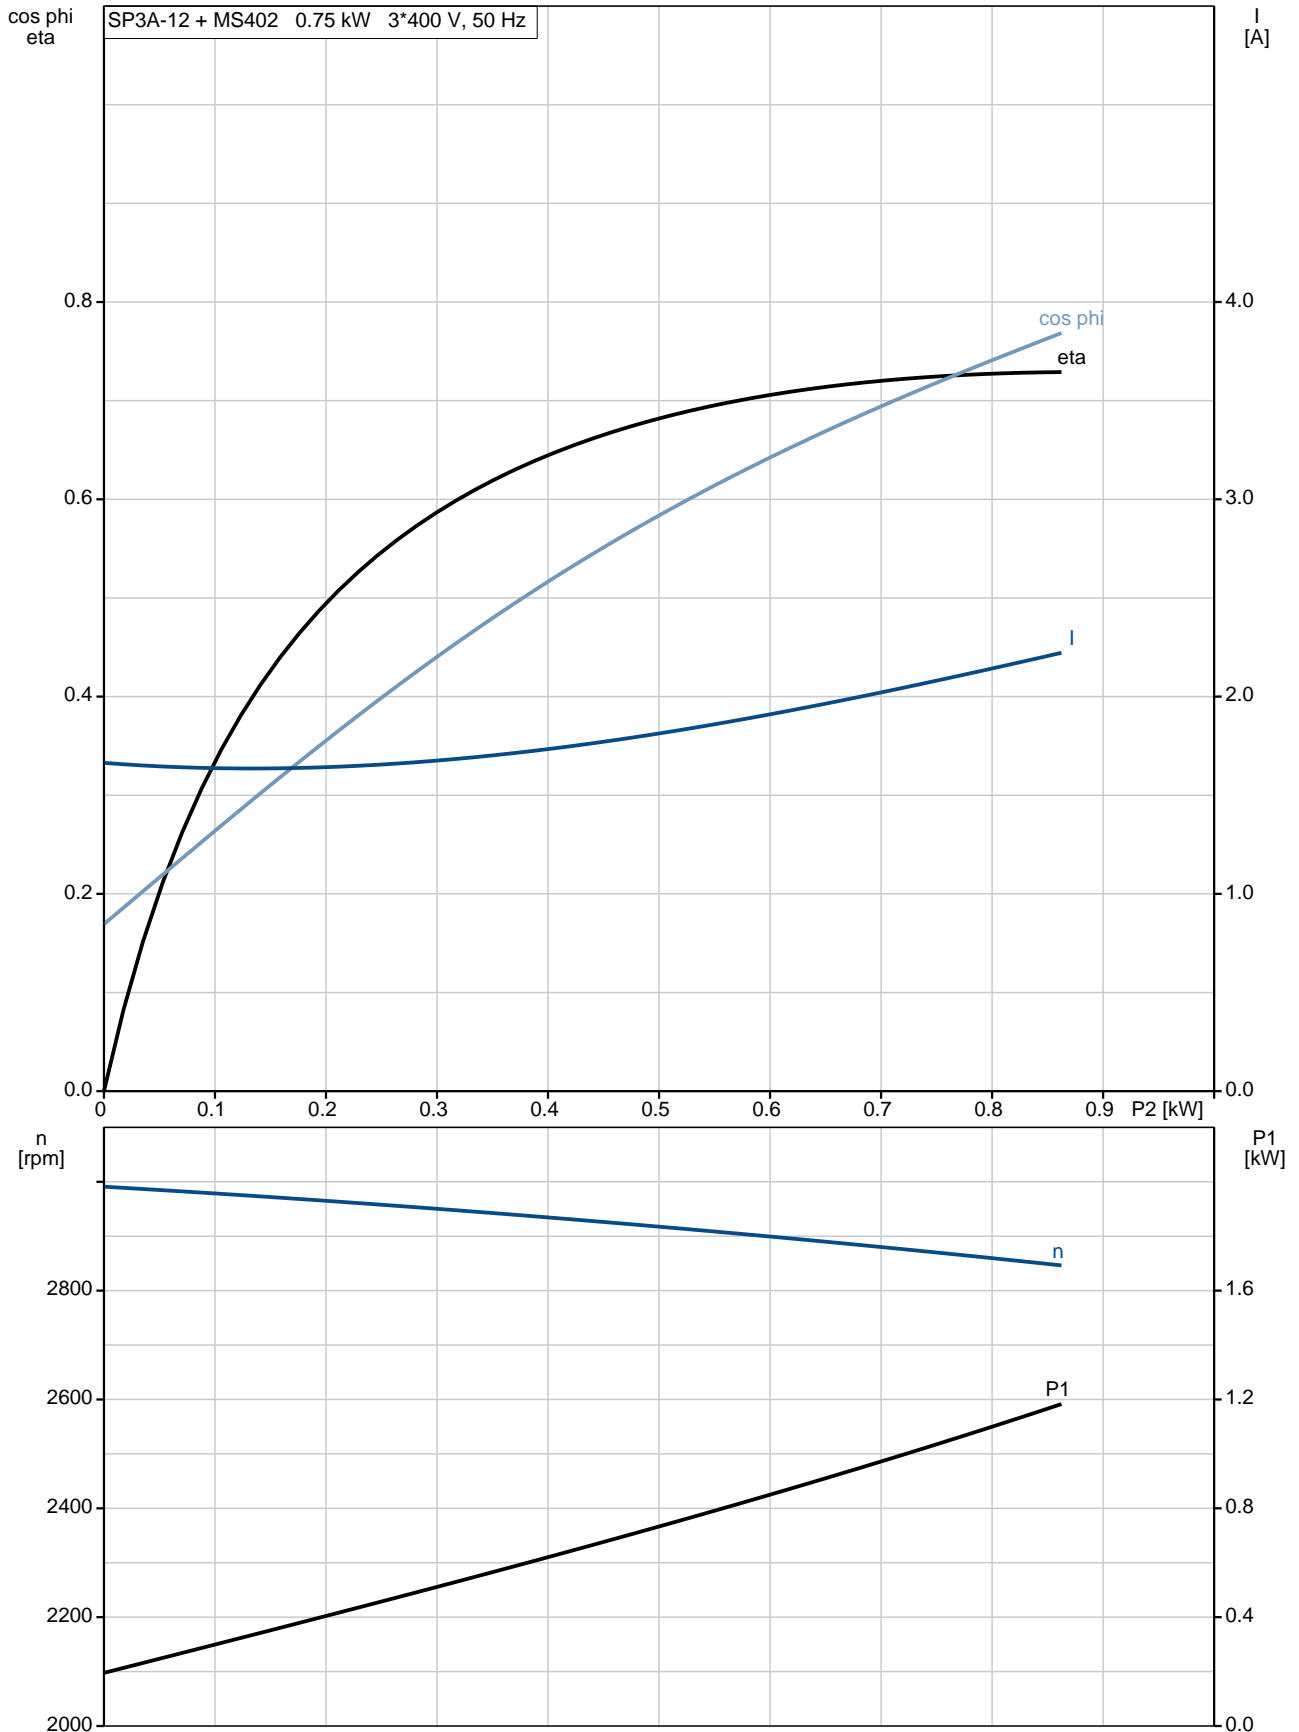


**10001K12 SP 3A-12 50 Hz**

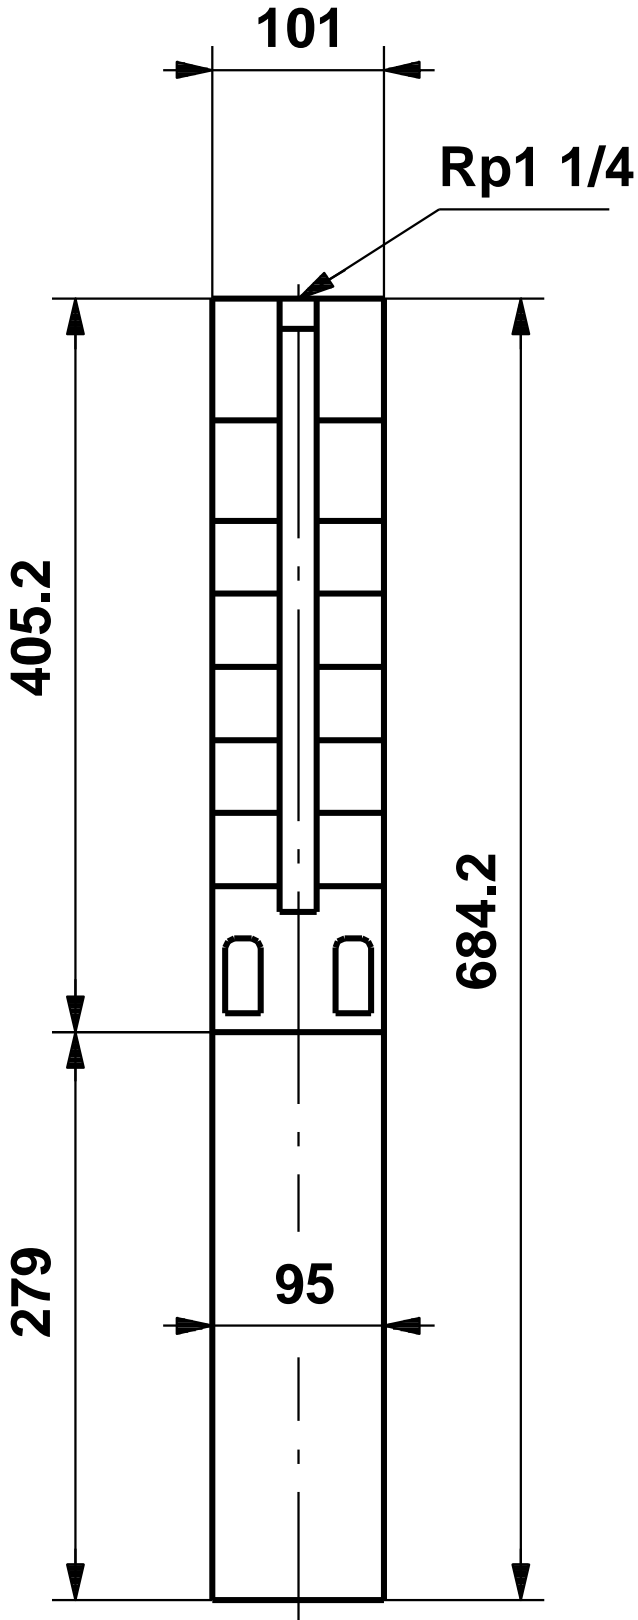

Note! All units are in [mm] unless others are stated.  
Disclaimer: This simplified dimensional drawing does not show all details.



10001K12 SP 3A-12 50 Hz

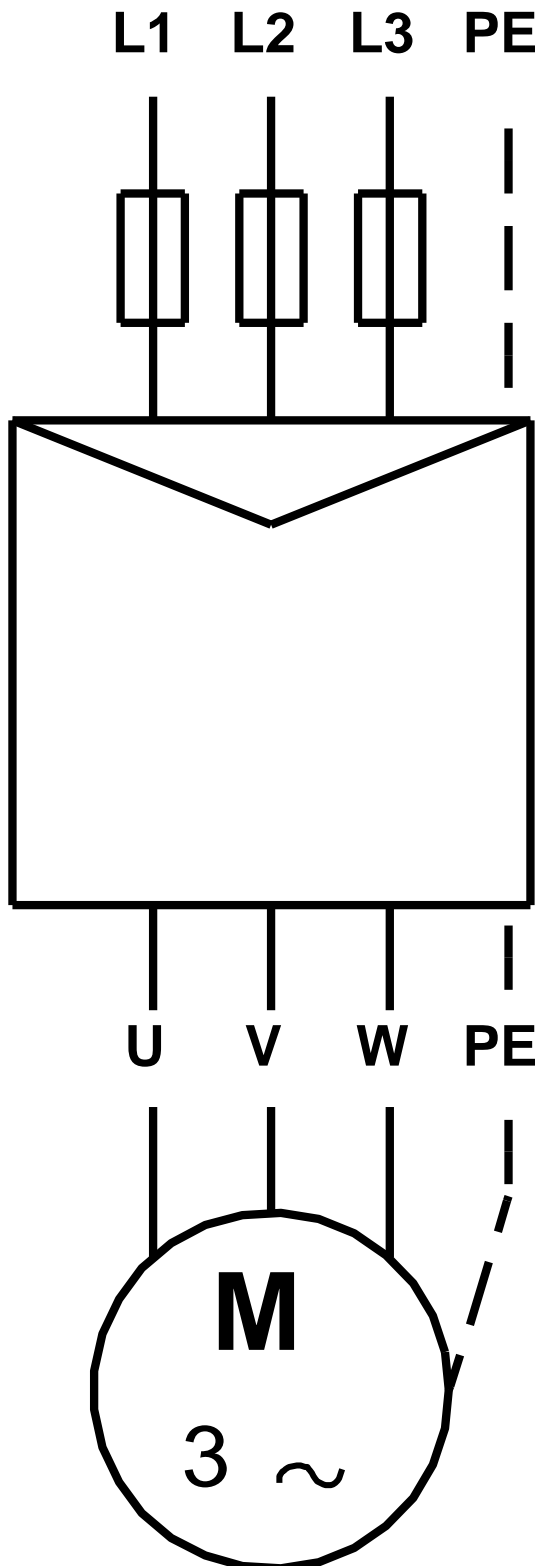

Note! All units are in [mm] unless others are stated.