


## CAM70/33

Company	Anglian Pumping Services	Customer	Date	11/24/2020
Contact	Joshua Harvey	Contact	List price	0.00 GBP
Project		Phone number	Family code	
Project no.		Email	Item no.	

Performance according to ISO 9906:2012 – Grade 3B

**Power datas referred to:**

Water, pure [100%] ; 4°C; 1000kg/m<sup>3</sup>; 1.57mm<sup>2</sup>/s

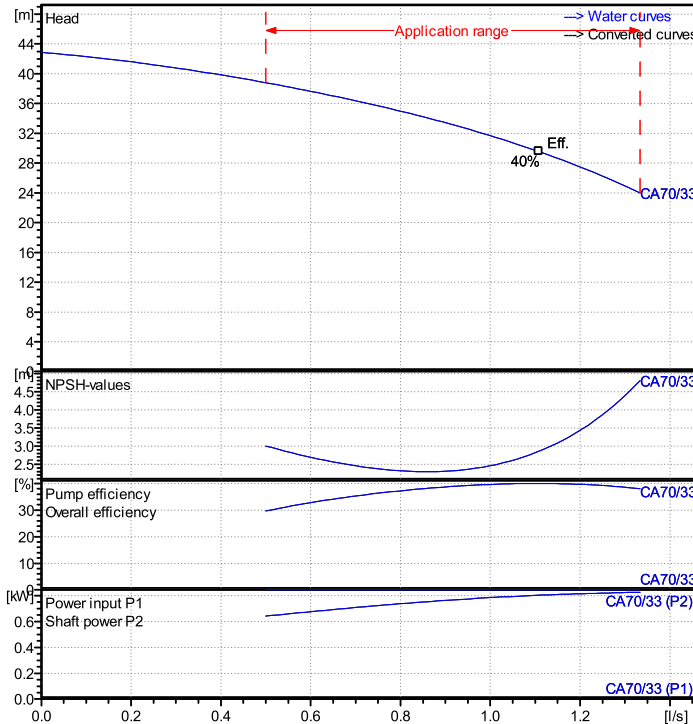

**Operating Data Specification**

Flow	0 l/s
Head	0 m

**Hydraulic data (duty point)**

Flow	
Head	
Power input	

**Pump data**

Make	Lowara
Type	CAM70/33 Twin-impeller centrifugal electric pump
Speed	2900
Head H(Q=0)	42.9 m
Suction side	
Discharge side	
Types of installation	Monobloc
Weight	15 kg

**Materials / seals**

SUCTION FLANGE	Stainless steel AISI 304
Pump body	Stainless steel AISI 304
Impeller	Stainless steel AISI 304
Diffuser cover	Stainless steel AISI 304

**Shaft Seal**

Rotating Assembly	V-Ceramic Alumina
Fixed Assembly	B-Carbon
Elastomers	E-EPDM
Springs	G-AISI 316
Other Components	F-AISI 304

**Motor data**

Rated power P2	0.75 kW	Nom. Speed	2900 rpm
Frequency	50	Phase	1~
Rated v oltage	220 V	Rated current	4.9 A
Protection class	IP 55	Insulation class	B
Permitted v oltage tolerance +/- 10%			

**Dimensions** mm

D	140	M	90
DNA	Rp 1¼	M1	113
DNM	Rp 1	N	112
H	226	N1	135
L	383	S	12
L1	76	S1	7

Note: