
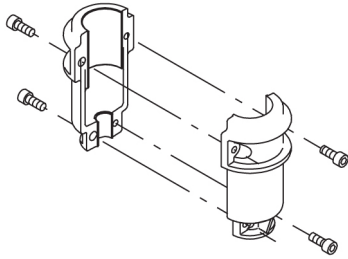



Qty.	Description
1	<p data-bbox="204 338 533 365"><b>CRNE 64-3-2 N-F-A-E-HQQE</b></p>  <p data-bbox="204 663 469 689">Product No.: <a href="#">96124025</a></p> <p data-bbox="204 723 1453 824">Vertical, multistage centrifugal pump with inlet and outlet ports on same the level (inline). Pump materials in contact with the liquid are in high-grade stainless steel. A cartridge shaft seal ensures high reliability, safe handling, and easy access and service. Power transmission is via a rigid split coupling. Pipe connection is via DIN flanges.</p> <p data-bbox="204 864 938 891">The pump is fitted with a 3-phase, fan-cooled asynchronous motor.</p> <p data-bbox="204 896 1430 947">The motor includes a frequency converter and PI controller in the motor terminal box. This enables continuously variable control of the motor speed, which again enables adaptation of the performance to a given requirement.</p> <p data-bbox="204 952 1414 1003">An operating panel on the motor terminal box enables setting of required setpoint as well as setting of pump to "Min." or "Max." operation or to "Stop". The operating panel has indicator lights for "Operation" and "Fault".</p> <p data-bbox="204 1008 1453 1088">Communication with the pump is possible by means of Grundfos GO Remote (accessory). The remote control enables further settings as well as reading out of a number of parameters such as "Actual value", "Speed", "Power input" and total "Power consumption".</p> <p data-bbox="204 1093 810 1120">The terminal box holds terminals for these connections:</p> <ul data-bbox="240 1124 1422 1473" style="list-style-type: none"><li>• pump start/stop input (potential-free contact)</li><li>• remote setpoint setting via analog signal, 0-10 V, 0(4)-20 mA</li><li>• 10 V voltage supply for setpoint potentiometer, I<sub>max</sub> = 5 mA</li><li>• three analog sensor inputs, 0-10 V, 0(4)-20 mA; the factory-fitted pressure sensor is connected to one of these inputs</li><li>• 24 V voltage supply for sensor, I<sub>max</sub> = 40 mA</li><li>• one analog output</li><li>• three digital inputs</li><li>• two Pt100 inputs</li><li>• two potential-free fault signal relays with changeover contact, reporting "Fault", "Operation" or "Ready"</li><li>• RS-485 GENIbus connection</li><li>• interface for Grundfos CIM fieldbus module.</li></ul> <p data-bbox="204 1509 523 1536"><b>Further product details</b></p> <p data-bbox="204 1541 1398 1592">The pump is equipped with a pressure sensor registering pump outlet pressure and enabling controlled pump operation based on constant pressure.</p> <p data-bbox="204 1597 1414 1648">An operating panel on the motor terminal box enables setting of required setpoint as well as setting of pump to "Min." or "Max." operation or to "Stop". The operating panel has indicator lights for "Operation" and "Fault".</p> <p data-bbox="204 1653 1453 1733">Communication with the pump is possible by means of Grundfos GO Remote (accessory). The remote control enables further settings as well as reading out of a number of parameters such as "Actual value", "Speed", "Power input" and total "Power consumption".</p> <p data-bbox="204 1774 1430 1877">Steel, cast iron and aluminium components have an epoxy-based coating made in a cathodic electro-deposition (CED) process. CED is a high-quality dip-painting process where an electrical field around the products ensures deposition of paint particles as a thin, well-controlled layer on the surface. An integral part of the process is a pretreatment. The entire process consists of these elements:</p> <ol data-bbox="204 1881 699 2007" style="list-style-type: none"><li>1) Alkaline-based cleaning.</li><li>2) Zinc phosphating.</li><li>3) Cathodic electro-deposition.</li><li>4) Curing to a dry film thickness 18-22 my m.</li></ol> <p data-bbox="204 2011 911 2038">The colour code for the finished product is NCS 9000/RAL 9005.</p> <p data-bbox="204 2065 284 2092"><b>Pump</b></p>

**Qty. Description**

A long split coupling connects the pump and motor shaft. It is enclosed in the motor stool by means of two coupling guards. The long coupling makes it possible to replace the shaft seal without removing the motor from the pump.



The motor stool connects the pump head and motor. The pump head has a combined 1/2" priming plug and vent screw.

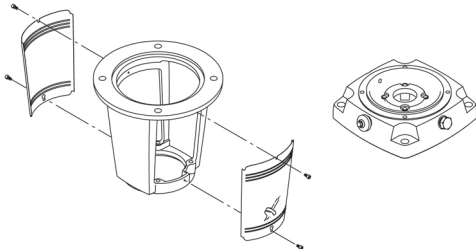

The pump is fitted with a balanced O-ring seal unit with a rigid torque-transmission system. This seal type is assembled in a cartridge unit which makes replacement safe and easy. Due to the balancing, this seal type is suitable for high-pressure applications. The cartridge construction also protects the pump shaft from possible wear from a dynamic O-ring between pump shaft and shaft seal.


Primary seal:

- Rotating seal ring material: silicon carbide (SiC)
- Stationary seat material: silicon carbide (SiC)

This material pairing is used where higher corrosion resistance is required. The high hardness of this material pairing offers good resistance against abrasive particles.

Secondary seal material: EPDM (ethylene-propylene rubber)

EPDM has excellent resistance to hot water. EPDM is not suitable for mineral oils.

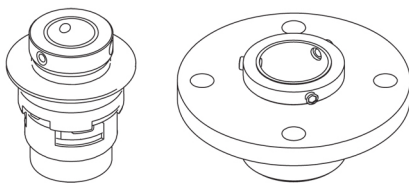


The shaft seal is retained in the pump head by a cover and screws. It can be replaced without removing the motor.

The pump has a special air-cooled shaft-seal chamber generating the same insulation effect as that of a vacuum flask. No external cooling is necessary; the ambient temperature is sufficient. An automatic vent vents the pump seal chamber.

The chambers and impellers are made of stainless-steel sheet. The chambers are provided with a PTFE neck ring offering improved sealing and high efficiency. The impellers have smooth surfaces, and the shape of the blades ensure a high efficiency.

The pump has a stainless-steel base mounted on a separate base plate. The base and base plate are kept in position by the tension of the staybolts which hold the pump together. Both the inlet and the outlet side of the base have two pressure gauge tappings. The pump is secured to the foundation by four bolts through the base plate. The flanges are fastened to the base by means of locking rings.



## Motor

The motor is a totally enclosed, fan-cooled motor with principal dimensions to IEC and DIN standards. The motor is flange-mounted with free-hole flange (FF).

Motor-mounting designation in accordance with IEC 60034-7: IM B 5 (Code I) / IM 3001 (Code II).

Electrical tolerances comply with IEC 60034.

The motor efficiency is classified as IE3 in accordance with IEC 60034-30-1.

The motor requires no external motor protection. The motor control unit incorporates protection against slow- and quick-rising temperatures, e.g. constant overload and stalled conditions.

## Technical data

### Controls:

Frequency converter: Built-in  
Pressure sensor: Yes

### Liquid:

Pumped liquid: Water  
Liquid temperature range: -40 .. 120 °C  
Selected liquid temperature: 20 °C  
Density at selected liquid temperature: 998.2 kg/m<sup>3</sup>

### Technical:

Pump speed on which pump data are based: 3556 rpm  
Rated flow: 77 m<sup>3</sup>/h  
Rated head: 76 m  
Pump orientation: Vertical  
Shaft seal arrangement: Single  
Code for shaft seal: HQQE  
Approvals on nameplate: CE, EAC, ACS  
Curve tolerance: ISO9906:2012 3B

### Materials:

Base: Stainless steel  
EN 1.4408  
AISI 316  
Impeller: Stainless steel  
EN 1.4401  
AISI 316  
Bearing: SIC  
Support bearing: Graflon

### Installation:

Maximum ambient temperature: 40 °C  
Maximum operating pressure: 16 bar  
Max pressure at stated temp: 16 bar / 120 °C  
16 bar / -40 °C  
Type of connection: DIN  
Size of inlet connection: DN 100  
Size of outlet connection: DN 100

Qty.	Description
------	-------------

Pressure rating for pipe connection: PN 16  
Flange size for motor: FF300


**Electrical data:**

Motor standard: IEC  
Motor type: 180MB  
IE Efficiency class: IE3  
Rated power - P2: 22 kW  
Power (P2) required by pump: 22 kW  
Mains frequency: 50 Hz  
Rated voltage: 3 x 380-480 V  
Rated current: 43.5-35.0 A  
Cos phi - power factor: 0.91-0.90  
Rated speed: 480-3540 rpm  
Efficiency: IE3 92,7%  
Motor efficiency at full load: 92.7 %  
Number of poles: 2  
Enclosure class (IEC 34-5): IP55  
Insulation class (IEC 85): F  
Motor No: 85901027




**Others:**

Minimum efficiency index, MEI : 0.70  
Net weight: 236 kg  
Gross weight: 287 kg  
Shipping volume: 0.82 m<sup>3</sup>  
Danish VVS No.: 385958532  
Country of origin: GB  
Custom tariff no.: 84137075

## 96124025 CRNE 64-3-2 N-F-A-E-HQQE 50 Hz

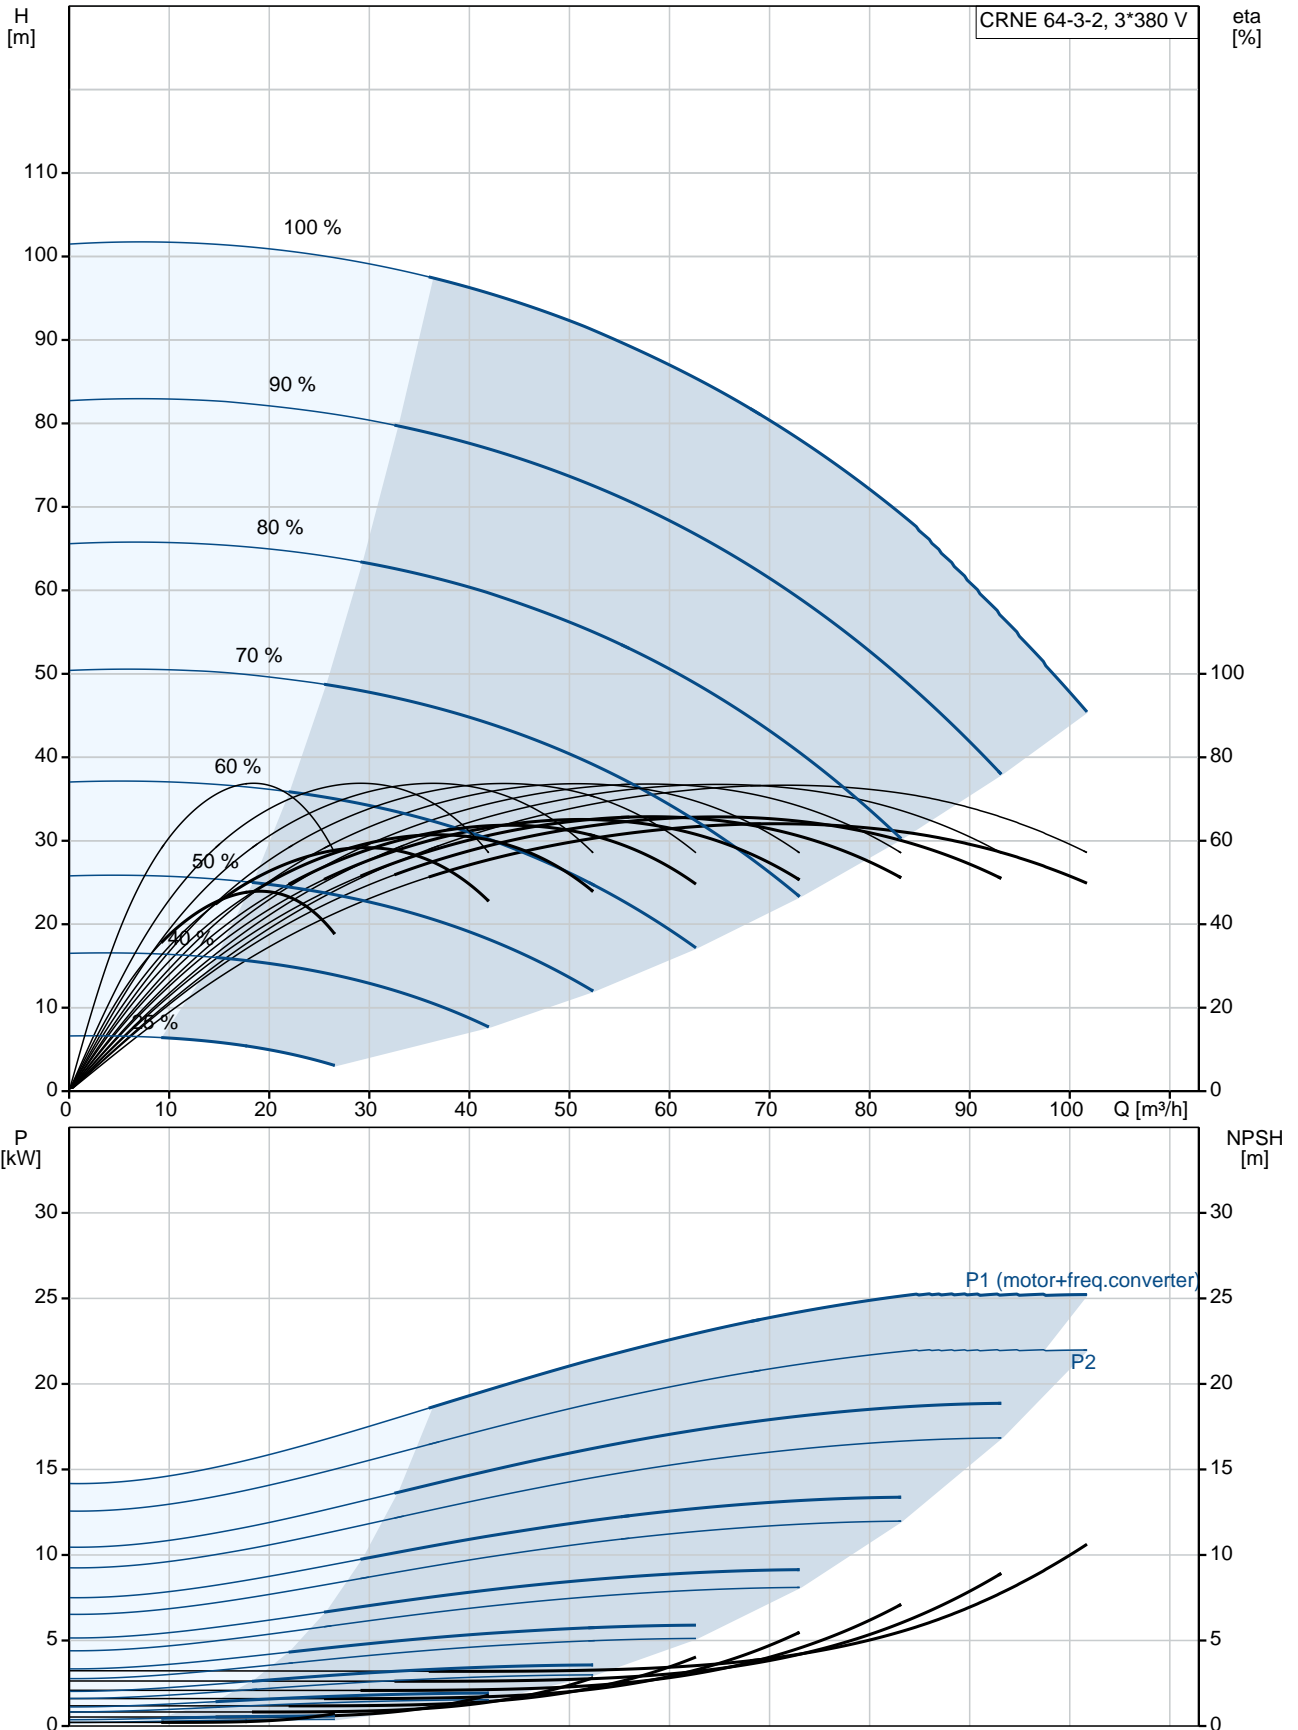

Description	Value
<b>General information:</b>	
Product name:	CRNE 64-3-2 N-F-A-E-HQQE
Product No:	96124025
EAN number:	5700396703282 5700396703282
<b>Technical:</b>	
Pump speed on which pump data are based:	3556 rpm
Rated flow:	77 m <sup>3</sup> /h
Rated head:	76 m
Head max:	101.1 m
Stages:	3
Impellers:	3
Number of reduced-diameter impellers:	2
Low NPSH:	No
Pump orientation:	Vertical
Shaft seal arrangement:	Single
Code for shaft seal:	HQQE
Approvals on nameplate:	CE, EAC, ACS
Curve tolerance:	ISO9906:2012 3B
Pump version:	N
Model:	B
<b>Materials:</b>	
Base:	Stainless steel EN 1.4408 AISI 316
Impeller:	Stainless steel EN 1.4401 AISI 316
Material code:	A
Code for rubber:	E
Bearing:	SIC
Support bearing:	Graflon
<b>Installation:</b>	
Maximum ambient temperature:	40 °C
Maximum operating pressure:	16 bar
Max pressure at stated temp:	16 bar / 120 °C 16 bar / -40 °C
Type of connection:	DIN
Size of inlet connection:	DN 100
Size of outlet connection:	DN 100
Pressure rating for pipe connection:	PN 16
Flange size for motor:	FF300
Connect code:	F
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	-40 .. 120 °C
Selected liquid temperature:	20 °C
Density at selected liquid temperature:	998.2 kg/m <sup>3</sup>
<b>Electrical data:</b>	
Motor standard:	IEC
Motor type:	180MB
IE Efficiency class:	IE3
Rated power - P2:	22 kW
Power (P2) required by pump:	22 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 380-480 V
Rated current:	43.5-35.0 A

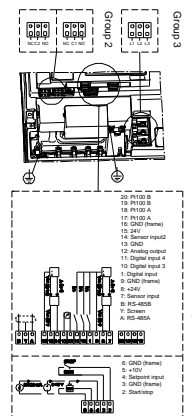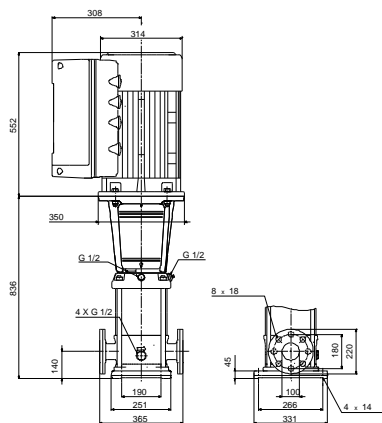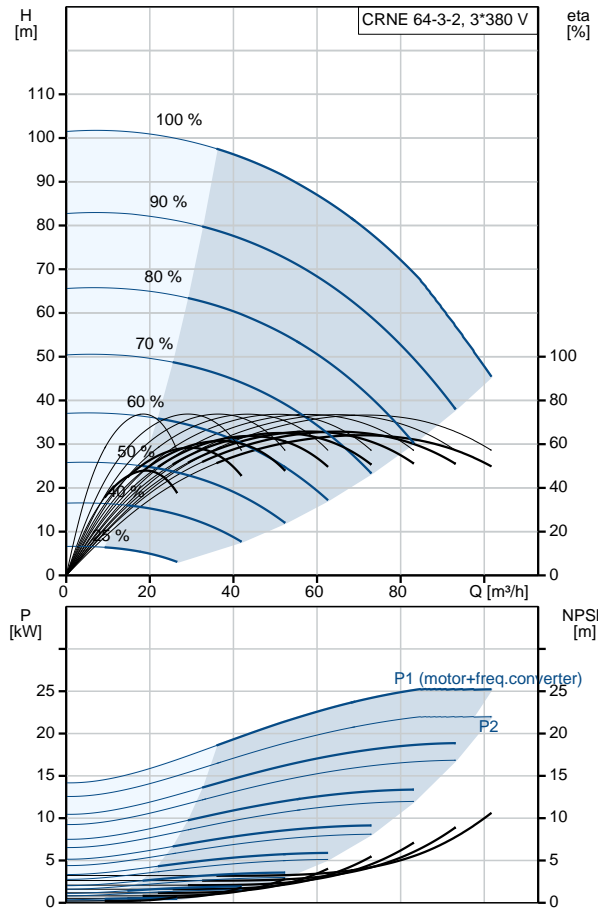



Company name:

Created by:

Phone:

Date:

26/11/2019

Description	Value
Cos phi - power factor:	0.91-0.90
Rated speed:	480-3540 rpm
Efficiency:	IE3 92,7%
Motor efficiency at full load:	92.7 %
Number of poles:	2
Enclosure class (IEC 34-5):	IP55
Insulation class (IEC 85):	F
Motor protec:	YES
Motor No:	85901027
<b>Controls:</b>	
Function Module:	ADVANCED I/O
Frequency converter:	Built-in
Pressure sensor:	Yes
<b>Others:</b>	
Minimum efficiency index, MEI :	0.70
Net weight:	236 kg
Gross weight:	287 kg
Shipping volume:	0.82 m <sup>3</sup>
Danish VVS No.:	385958532
Country of origin:	GB
Custom tariff no.:	84137075

## 96124025 CRNE 64-3-2 N-F-A-E-HQQE 50 Hz

