

Customer	Date	12/9/2020
Contact	Project	
Phone number	Project no.	
Email		

ESHE 50-125/30/P25RSSA

101860410

Operating data

Pump type	Single head pump	Fluid	Water, pure
No. of pumps / Reserve	1 / 0	Operating temperature t A	°C 4
Nominal flow	l/s 0	pH-value at t A	7
Nominal head	m 0	Density at t A	kg/m ³ 1000
Static head	m 0	Kin. viscosity at t A	mm ² /s 1.569
Inlet pressure	kPa 9.8	Vapor pressure at t A	kPa 100
Environmental temperature	°C 20	Solids	0
Available system NPSH	m 0	Altitude	m 0

Pump data

Make	Lowara	Nominal	l/s ()
Speed	rpm 2900	Flow Max-	l/s 21.7
Number of stages	1	Min-	l/s 8.7
Max. casing pressure	kPa	Nominal	m
Max. working pressure	kPa 202.3	Head at Qmax	m 7.1
Head H(Q=0)	m 21	at Qmin	m 18.7
Weight	kg	Shaft power	kW ()
Max. Impeller R	mm 131	Max. shaft power	kW 2.9
designed	mm 123	Efficiency	%
Min.	mm 114	NPSH 3%	m
Suction nozzle	DN 65 PN 12 EN1092-2 (e-SH)	Discharge nozzle	DN 50 PN 12 EN1092-2 (e-SH)

Pump Materials

Pump body	Stainless steel / AISI 316L
Impeller	Stainless steel / AISI 316L
SEAL HOUSING	Stainless steel / AISI 316L
Wear Ring	Stainless steel / AISI 316L
Counterwear ring	Stainless steel / AISI 316L
Shaft extension	Stainless steel / AISI 316L
Rigid shaft coupling	Stainless steel / AISI 316
Impeller locknut and washer	Stainless steel / AISI 316
Tab	Stainless steel / AISI 316L

Shaft Seal

Single Seal	
e-SH - uniten	Roten
Rotating Assembly	V-Ceramic
Fixed Assembly	B-Resin impregnated carbon
Elastomers	V-FKM (FPM)
Springs	G-AISI 316
Other Components	G-AISI 316

Motor data

Manufacturer	Lowara	Electric voltage	400 V
Specific design	IE3 Three phase surface motor		
Type	PLM90.../330 E3		
Rated power	3 kW	Electric current	6.33 A
Speed	2880 rpm	Degree of protection	IP 55
Frame size	90	Weight	25 kg
Shaft diameter	0 mm	Colour	RAL 5010
Insulation class	F		

Coupling

Manufacturer	
Series	
Type	
Frame size	
Spacer length	
Weight	
Coupling protection	

Base plate

Description	
Weight	

Remarks:

Customer	Date	12/9/2020
Contact	Project	
Phone number	Project no.	
Email		


ESHE 50-125/30/P25RSSA

101860410

Hydraulic data

Operating Data Specification		Hydraulic data (duty point)		Impeller design	
Flow	0 l/s	Flow		Impeller R	123 mm
Head	0 m	Head		Frequency	50 Hz
Static head	0 m	MEI >=0,4		Speed	2900 rpm

Power data referred to:
 Water, pure [100%] ; 4°C; 1000kg/m³; 1.57mm²/s
 Performance according to ISO 9906:2012 – Grade 3B

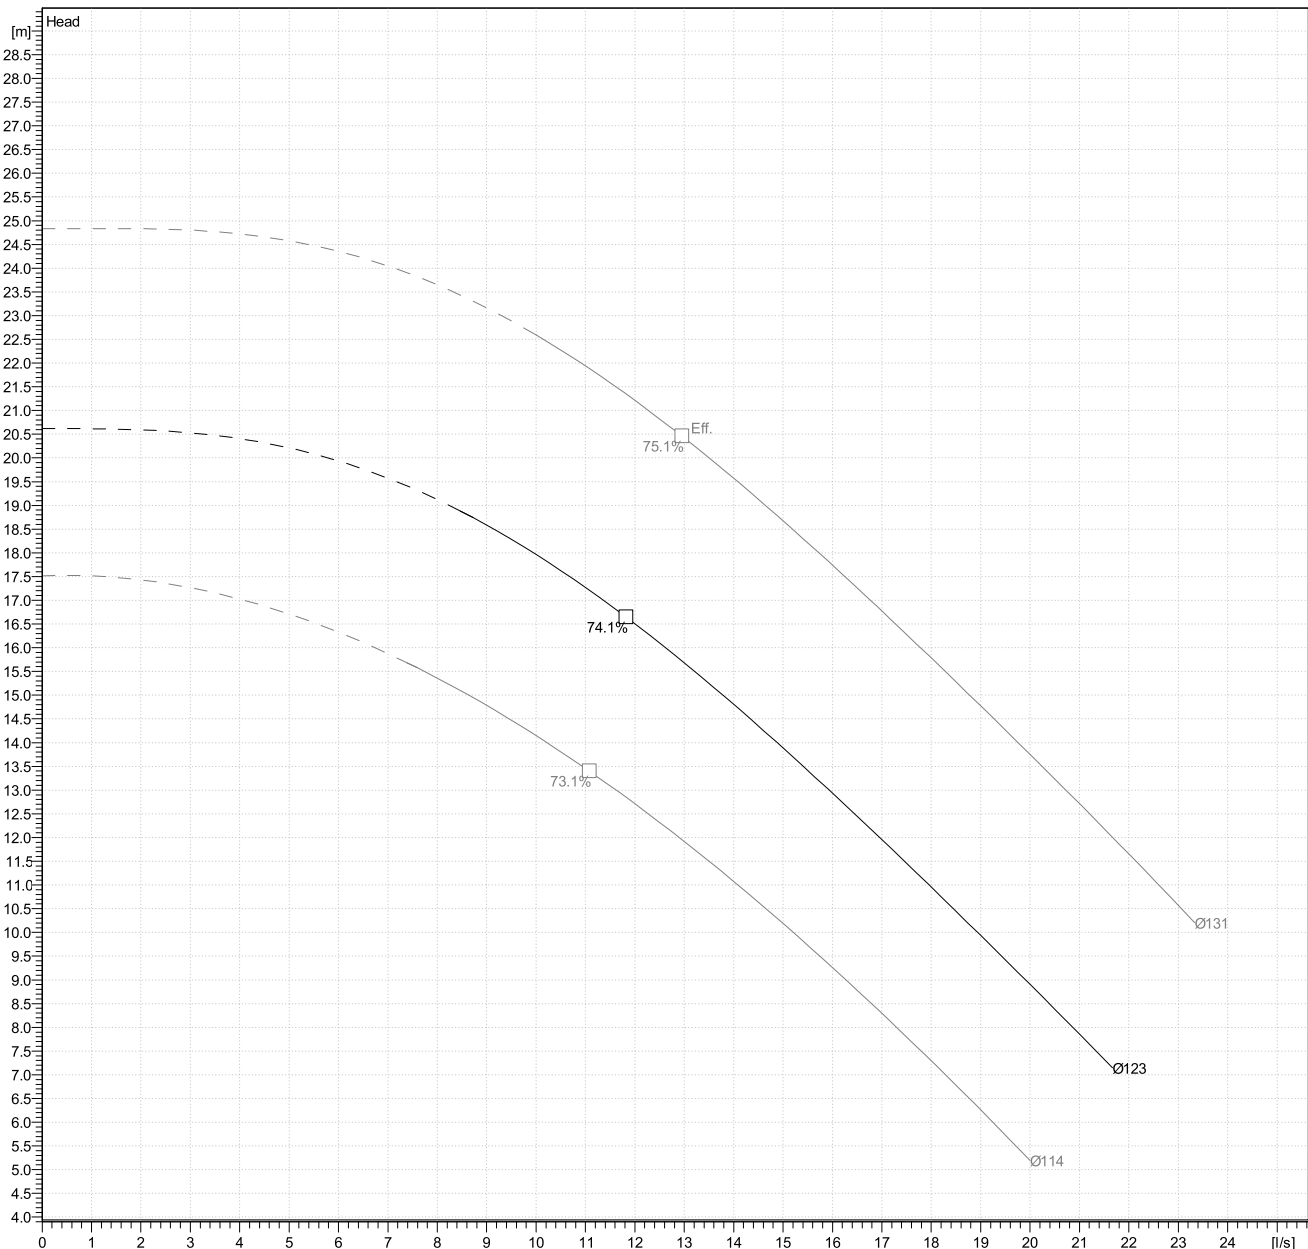

Customer	Date	12/9/2020
Contact	Project	
Phone number	Project no.	
Email		

ESHE 50-125/30/P25RSSA
101860410

Dimensions mm/l

a	100		
B	253		
DNA	65		
DNM	50		
h1	132		
h2	160		
Hmax	292		
k	104		
L	498		
n	210		
n1	130		
x	134		
		Total weight	33 kg

Connections mm

Suction nozzle	Discharge nozzle
DN 65	DN 50
PN 12	PN 12
EN1092-2 (e-SH)	EN1092-2 (e-SH)

D	185	D	165
Dia. Holes	18	Dia. Holes	18
DN	65	DN	50
G	104	G	83
M	145	M	125
Max thickness	18	Max thickness	18
N° Holes	4	N° Holes	4

Drawing

