



Data sheet

Hydraulic data

Maximum operating pressure P_N	10 bar
Head max H_{max}	8,1 m
Flow max Q_{max}	17,7 m³/h
Minimum suction head at 50 °C m	3 m
Minimum suction head at 95 °C m	10 m
Minimum suction head at 110 °C	16 m
Min. fluid temperature T_{min}	-20 °C
Max. fluid temperature T_{max}	110 °C
Min. ambient temperature T_{min}	-20 °C
Max. ambient temperature T_{max}	40 °C

Motor data

Energy efficiency index (EEI)	≤0,23
Mains connection	1~230 V ±10%, 50/60 Hz
Min current I_{min}	0,15 A
Max current I_{max}	1,33 A
Rated power P_2	230 W
Min. speed n_{min}	1200 1/min
Max. speed n_{max}	4800 1/min
Power consumption $P_{1 min}$	10 W
Power consumption $P_{1 max}$	305 W
Emitted interference	EN 61800-3;2004+A1;2012 /residential area (C1)
Interference resistance	EN 61800-3;2004+A1;2012 /industrial environment (C2)
Threaded cable connection	2 x M20x1.5
Insulation class	F
Protection class	IPX4D

Materials

Pump housing	Grey cast iron
Impeller	PPS-GF40
Shaft	Stainless steel
Bearing	Carbon, metal-impregnated

Installation dimensions

Pipe connection on the discharge side <i>DNd</i>	DN 40
Pipe connection on the suction side <i>DNs</i>	DN 40
Port-to-port length <i>L0</i>	220 mm

Equipment/function

Function

Control mode	Δp -v for variable differential pressure
	Δp -c for constant differential pressure
	Constant speed (3 speed stages)
Multi pump operation	Main/Standby
Display	Setpoint


Equipment

Approvals and labels	CE
	VDE
	EAC
Display	LED segment display
Display information	Basic Version: LED display (small) for showing the set head or speed stage.
Pump control	Electronic-controlled pump
Quick electrical connection	Wilo plug

Connectivity

Digital input	Ext. OFF (via accessories Wilo-Connect module Yonos MAXO)
Digital output	SSM/SBM (via accessories Connect module Yonos MAXO)


Pump curves

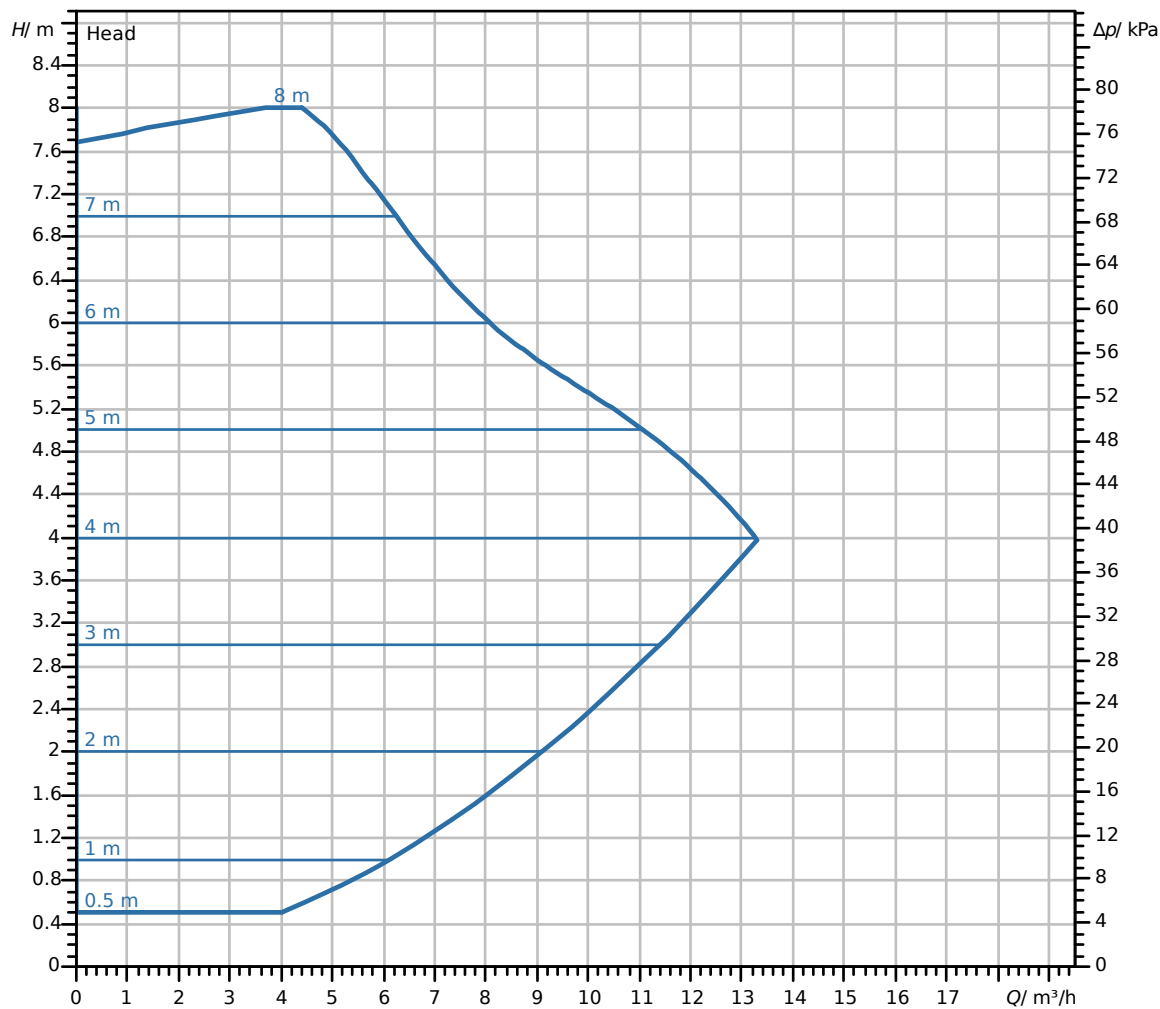

Fluid media	Water 100 %
Fluid temperature	20.00 °C
speed at duty point	4,134 1/min

Dimensions and dimensions drawings


Yonos MAXO-D 40-0,5/8

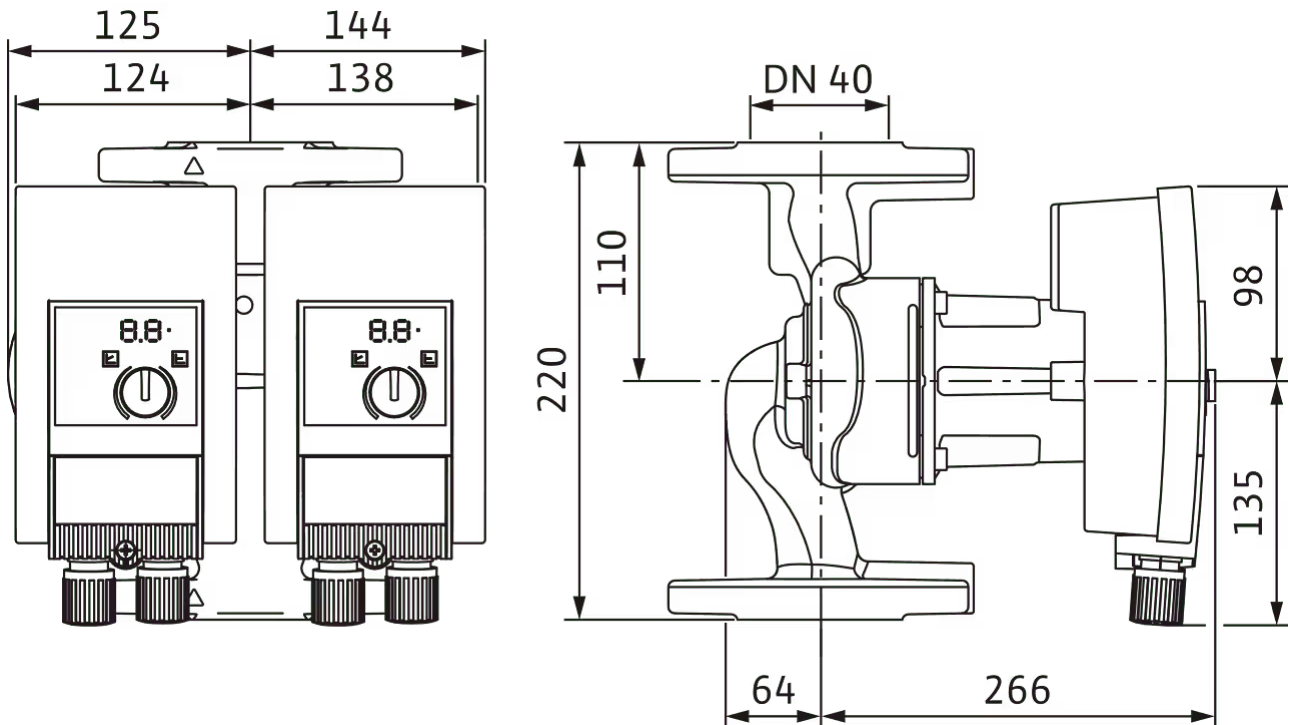


Wiring diagram

1~230V, 50/60 Hz

1~ 230 V, 50/60 Hz

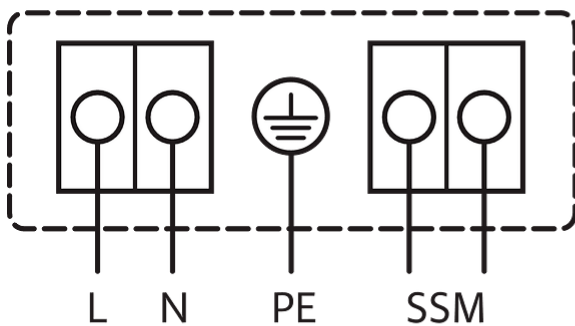

3~230 V, 50/60 Hz

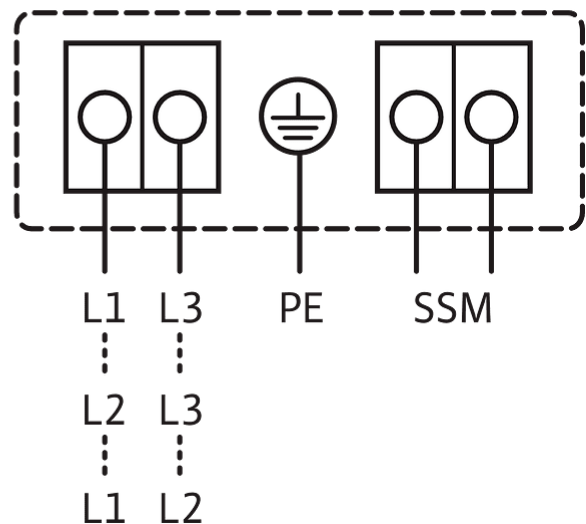

Collective fault signal
SSM: (NC contact in accordance with VDI 3814, load capacity 1 A, 250 V ~)

Standard: 1~230 V, 50/60 Hz

Option: 3~230 V, 50/60 Hz